

TWO-DIMENSIONAL ANALYTICAL MODEL (FORTRAN)  
FOR PREDICTION OF CONTAMINANT MOVEMENT  
IN GROUND WATER

by

Douglas C. Kent  
School of Geology  
Oklahoma State University  
Stillwater, Oklahoma 74078

Jan Wagner  
School of Chemical Engineering  
Oklahoma State University  
Stillwater, Oklahoma 74078

Fred E. Witz  
School of Geology  
Oklahoma State University  
Stillwater, Oklahoma 74078

U.S. Environmental Protection Agency  
Cooperative Agreement No. CR811142-01-0

Project Officer

Carl G. Enfield  
Robert S. Kerr Environmental Research Laboratory  
U.S. Environmental Protection Agency  
Ada, Oklahoma 74820

#### **Disclaimer**

Although the information described in this document has been funded wholly or in part by the United States Environmental Protection Agency under cooperative agreement CR806931 to the National Center for Ground Water Research and cooperative agreement CR811142-01-0 to Oklahoma State University, it has not been subjected to the Agency's required peer and administrative review and therefore does not necessarily reflect the views of the Agency and no official endorsement should be inferred.

## Part I

### Program Description

#### Introduction

A FORTRAN computer program has been developed to calculate plume concentrations. The equation is derived from Wilson and Miller (1978). The program can calculate and display the concentration at a single point or as a grid map of concentration. The parameters needed to describe the problem are defined in Table I-1.

The program was developed and tested using Microsoft FORTRAN-80 (FORTRAN 66 standard) on the Kaypro microcomputer and Microsoft FORTRAN version 2.0 on (FORTRAN 77 standard) the IBM PC microcomputer. With only minor changes, the program should function using any corresponding FORTRAN compiler. The program should function within 40K bytes of random access memory (RAM) on most computers.

---

\* CPM is a registered trademark of Digital Research.

TABLE I-1  
DEFINITION OF TERMS

Primary Variables:		(Units)
C	= Concentration of leachate at a specific time and distance.	(M/L <sup>3</sup> )
X	= Distance from source where concentration of leachate is computed. Distance is measured in direction of ground-water flow (gradient).	(L)
y	= Transverse distance measured from the center-line of ground-water flow.	(L)
t	= Sample time from beginning of leachate source flow.	(T)
Aquifer Parameters:		
m	= Effective aquifer thickness or zone of mixing.	(L)
n	= Effective porosity of aquifer or zone of mixing. (dimensionless)	
V	= Velocity of ground-water flow within voids; estimated directly or from:	(L/T)
	$V = \frac{KI}{n}$ (or) $V = \frac{TI}{mn}$	
where:		
K	= Coefficient of permeability or hydraulic conductivity of aquifer or zone of mixing.	(L/T)
T	= Transmissivity of aquifer or zone of mixing.	(L <sup>2</sup> /T)
I	= Gradient of ground-water flow.	(dimensionless)

TABLE I-1  
continued

Transport Parameters: (Units)

$D_x$  = Longitudinal dispersion coefficient (mixing rate) ( $L^2/T$ )  
in the x direction; estimated directly or from:

$$D_x = a_x V + D_m$$

where:

$a_x$  = Longitudinal dispersivity. (L)

$D_m$  = Molecular diffusion coefficient, which is assumed to be negligible for velocities typical of permeable aquifers.  $D_m$  may be the dominant process in aquitards where  $a_x V$  would be negligible ( $V < 0.1 \text{ cm/yr}$ ).

$D_y$  = Transverse dispersion coefficient (mixing rate) ( $L^2/T$ )  
in the y direction; estimated directly or from:

$$D_y = a_y V + D_m \quad (\text{or}) \quad D_y = \frac{D_x}{D_r} + D_m$$

where:

$a_y$  = Transverse dispersivity (L)

$D_r$  = a ratio which commonly ranges between 5 and 10 for medium to coarse sand aquifers. (dimensionless)

$R_d$  = Retardation factor; estimated directly or from: (dimensionless)

$$R_d = 1 + \frac{\rho_b K_d}{n_t} \quad (\text{or}) \quad R_d = \frac{V}{V_d}$$

where:

$\rho_b$  = Bulk density of aquifer medium ( $M/L^3$ )

$n_t$  = Total porosity. (dimensionless)

$K_d$  = Distribution factor for sorption on aquifer medium (from sorption isotherm column studies). ( $L^3/M$ )

$V$  = Velocity of ground water. ( $L/T$ )

$V_d$  = Observed velocity of leachate for a given concentration and chemical species. ( $L/T$ )

TABLE I-1  
continued

Transport Parameters (continued):	(Units)
$\gamma$ = (Gamma) Coefficient for radioactive or biological decay. For no decay, the value is one. Calculated from:	(dimensionless)

$$\gamma = 1 + \frac{4D_x \lambda}{V^2} \quad (\text{or}) \quad \gamma = 1 + \frac{4D_x \log(2)}{V^2 t_{1/2}}$$

where:

$\lambda$ = (Lambda) Decay constant.	(1/T)
$t_{1/2}$ = Halflife; time when half of the original mass remains.	(T)

Source Rate of Leachate:

$Q_m$ = Mass flow rate estimated directly or obtained from:	(M/T)
---	-------

$$Q_m = A Q_r \quad (\text{or}) \quad Q_m = Q C_0$$

$$(\text{or}) \quad Q_m = A Q_v C_0$$

where:

$Q_r$ = Mass per area flow rate.	(M/L <sup>2</sup> T)
$Q$ = Volume flow rate.	(L <sup>3</sup> /T)
$Q_v$ = Recharge rate.	(L/T)
$A$ = Area of source.	(L <sup>2</sup> )
$C_0$ = Initial concentration.	(M/L <sup>3</sup> )

TABLE I-1  
continued

Intermediate Variables: (Units)

$r$  = A weighted distance or radius; given by: (L)

$$r = \sqrt{(x^2 + \frac{D_x}{D_y} y^2)}$$

$x_D$  = A characteristic dispersion length or scale factor; given by: (L)

$$x_D = \frac{D_x}{\sqrt{\gamma} V}$$

$t_D$  = A characteristic dispersion time or scale factor; given by: (T)

$$t_D = \frac{R_d D_x}{\gamma V^2}$$

$Q_D$  = A characteristic dilution-dispersion flow; given by: ( $L^3/T$ )

$$Q_D = nm \sqrt{D_x D_y}$$

$r_m$  = Minimum distance from a non-point source for which equation has a certain accuracy; given by: (L)

$$r_m = \frac{V \sqrt{\gamma} L^2}{50 D_x N} \left(1 + \frac{D_x}{D_y}\right)$$

(or)

$$r_m = \frac{L^2}{50 x_D N} \left(1 + \frac{D_x}{D_y}\right)$$

where:

$N$  = Allowable approximation accuracy. (dimensionless)

$L$  = The greater of the source length and width.

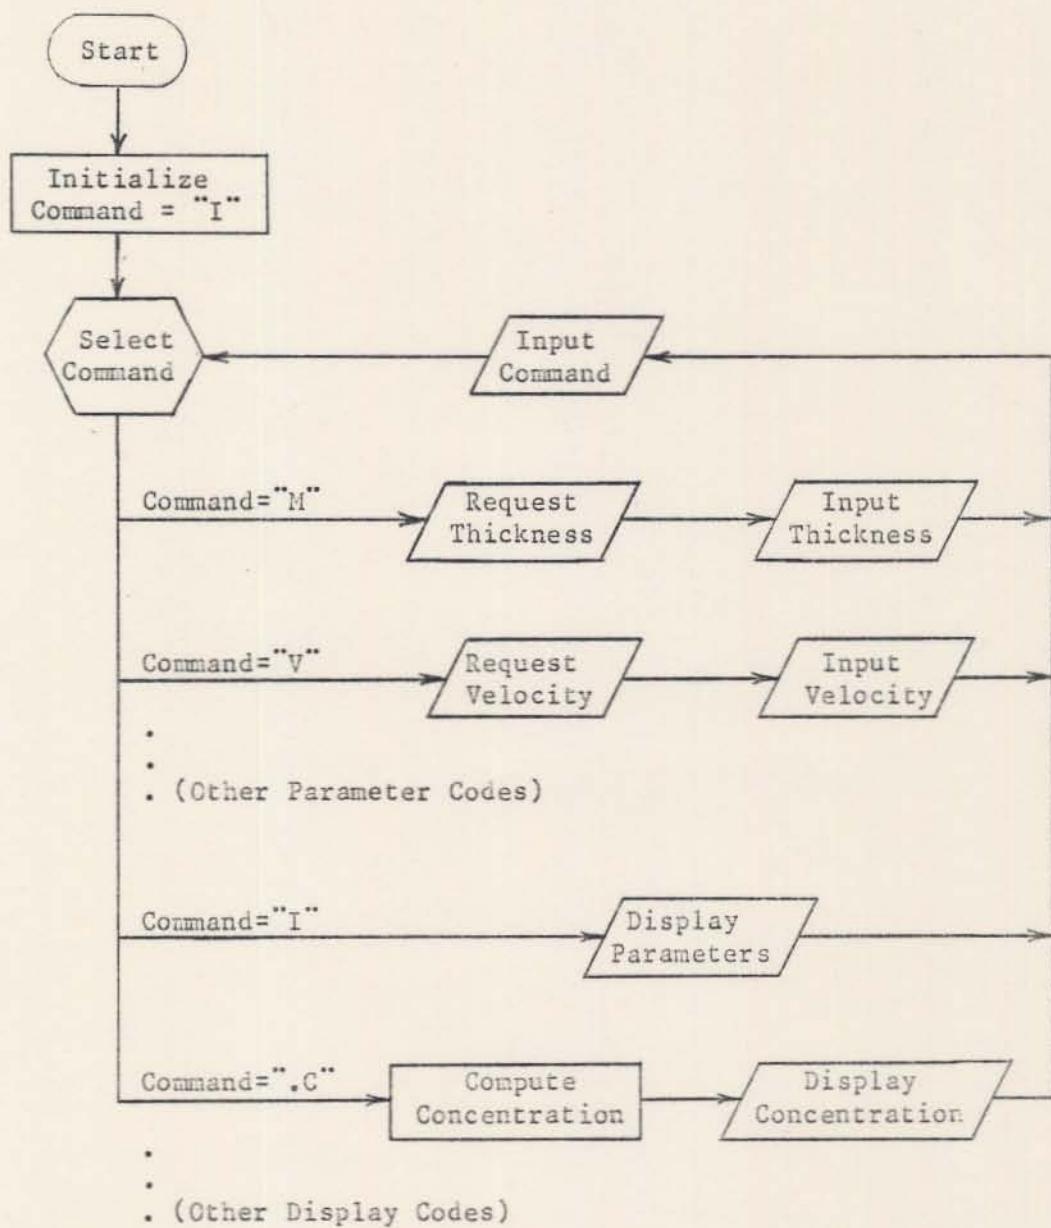


Figure I-1. Program Logic Flowchart

## Assumptions and Limitations

The concentration equation is based on the following assumptions:

1. The ground-water flow regime is saturated.
2. The aquifer is unlimited (infinite) in areal extent (x and y directions).
3. All aquifer properties are homogeneous.
4. The ground-water flow is continuous and uniform in direction and velocity.
5. There is no dilution of the plume from recharge outside the source area.
6. The leachate source is a point in plain view.
7. The leachate is evenly distributed over the vertical dimension of the saturated zone.
8. The leachate source supplies a constant mass flow rate.

Although the program has been tested, the current version is subject to revision. As with any complex computer program, the results should be checked by professionals whenever safety is involved. The authors cannot assume any liability for damage resulting from the use of this program.

## Program Description

### Initialization

When the FORTRAN version is started, the user has the choice of entering all of the required parameters or recovering parameters saved during a previous execution of the program with the "OD" command. The units for any parameter (as listed in Appendix 1) can be modified in the BLOCK DATA section of the program, if the corresponding conversion factor (variable beginning with "U") is modified accordingly.

### Commands

As shown by the flowchart in Figure I-1, once initialized, the program operates on the basis of requesting a command from the user, which designates a particular operation to be performed. In the FORTRAN version, all commands must be entered in upper case. (Many keyboards have a special shift for this purpose.) The commands are listed in Appendix I-A. The commands may be entered in any order, one at a time. A more detailed listing of the parameters and corresponding commands is also shown in Appendix I-A. The parameters are explained in Table I-1. During execution of the program, all parameters retain their values until changed by the user.

In some cases, more than one command is provided to enter a given parameter or to perform a given operation. Some commands provide a menu to select other commands (e.g. "D"), whereas some commands simply perform two or more other commands (e.g. ".IG"). When first using the program, most users will prefer to learn only one command for each operation. The commands used in the examples should serve this purpose and will be sufficient for most problems. Other commands for faster operation can be learned later.

### Dispersion Coefficients

The program accepts either dispersion coefficient ("DX", "DY") or dispersivity ("AX", "AY"). If dispersivity is entered, then the dispersion coefficient will change whenever velocity is changed. Similarly, when the dispersion ratio ("DR") is used, the y dispersion coefficient ("DY") will change whenever the x dispersion coefficient ("DX") is changed. If the user enters a value for the y dispersion coefficient ("DY"), then the value entered will be retained until changed by the user.

### Source data

The FORTRAN version accepts the source flow rate in any of the following forms:

1. Total mass flow
2. Mass per area flow
3. Volume flow and concentration
4. Volume per area flow and concentration

The basic equation for concentration assumes a constant source flow rate. However, the equation can be applied to a source with a number of time steps, each having a constant flow rate. Computer memory limits the total number of time steps from all sources. The limit, displayed by the "Q" command, will vary from computer to computer. The limit, displayed by the "Q" command, will vary from computer to computer. The concentration can be displayed for sample times during any time step. (Time steps that have not begun are ignored.)

When organizing data for the program, the user must select a zero reference time. Source starting times (beginning of time step) and sample

times (when concentration is calculated) are then described as the length of time before (negative time) or after (positive time) the reference time. The zero reference time must be chosen before the earliest desired sample time, because negative sample times are not allowed.

As time passes, the concentration at a given location reaches a constant value known as steady state. The steady state value for concentration can be useful, for example, as a "worst case" scenario. With the FORTRAN version, a negative value for sample time (usually -1) is used to request concentration at steady state. This is why actual sample times cannot be negative.

(Negative values are allowed for starting times of source time steps.)

In the basic equation, the contaminant is assumed to enter the ground water directly below a point source. In practice, however, the equation can be used for locations far enough from a non-point source so that the source appears to be a point. Wilson and Miller (1978) provided two equations which relate the accuracy of approximation to the distance from the source, as shown in Table I-1. The FORTRAN version uses these equations to calculate an estimate of the accuracy of the results.

The FORTRAN version accepts data for either point or non-point sources. Since the equation requires sources to appear as point sources, the program divides non-point sources into subareas using one of the accuracy equations in the manner shown in Table I-1. The desired accuracy, initially 10% or 0.1, is set by the "QE" command. Sample locations near a large source could take considerable computation time (e.g 5 seconds on a microcomputer). To limit the computation to a reasonable time, a limit is placed on the number of subareas for each source. The limit is initially set at 100 subareas, but may be changed by the "QN" command.

The FORTRAN version accepts data for multiple sources. As a result, the source location is requested. As with time, the user must select an arbitrary zero reference location. Source and sample locations are then described as the distance down-gradient (+x) or up-gradient (-x) from the zero reference and the perpendicular distance from the x axis (+ or -y). After all information for one source has been entered, the program will allow adding another source. Another source can also be added after concentration has been displayed by re-entering the "Q" command. The number of sources is limited by the total number of time steps for all sources.

Source data may be changed during the use of the "Q" command by entering a negative number to "back up" or delete time steps. For example, if two sources have been entered each having three time steps, entering a negative number will have the following effect:

NUMBER ENTERED	RESULT
-1	First source unchanged. Second source with 2 time steps.
-2	First source unchanged. Second source with 1 time step.
-3	First source only.
-4	First source with 2 time steps.
-5	First source with 1 time step.
-6	No source data.
<-6	No source data.

The ".IQ" (or ".DQ") command may be used to observe these affects.

In addition to completely changing source data with the "Q" command, the FORTRAN version also provides the "QM" command which allows the user to change the mass flow rate. The "QM" command will prompt the user for a time step number to change. Entering a value of -1 will list the time steps with the current source flow rate. If a time step number is entered the program will prompt for the mass flow rate. The rate must be entered as a mass flow rate regardless of the original form.

### Grid Map

The ".G" command will calculate and print a map of the concentration for locations on a grid. The first time the grid map command is entered, the FORTRAN version will prompt for the grid limits, if the "L" command has not been used. The FORTRAN version requires only

1. The x lower limit (left edge),
2. The x upper limit (right edge) or the x spacing (horizontal interval between nodes)
3. The y lower limit (top edge)
4. The y upper limit (bottom edge)

If the x upper limit or spacing is omitted, the number of nodes will be determined by the "SN" parameter. The "SN" parameter is normally set to zero, in which case the number of nodes will be adjusted to fill the length of line set by the "SL" parameter. The number of columns per node is set by the "SX" parameter. The number of lines per node is set by the "SY" parameter. The y spacing will default to the x spacing (square nodes). If the x upper limit and spacing of "SN" specify a map wider than the length of line ("SL"), then the map will be displayed in more than one section, which can be joined together. The initial values are

SL = 80 columns per line,

SN = 0 nodes per grid,

SX = 6 columns per node,

SY = 2 line per node.

If all of the concentration values on the grid map appear as zeros, most likely the values are too small to print. In this case, use the "SC" command to enter a multiplier of 10,100, etc. Values which are too large to print

will be converted to a (magnitude) + (one digit exponent of ten) and marked by a negative sign. (If the exponent exceeds ten, only the exponent is shown.) The larger values can be reduced with a multiplier of 0.1, 0.01, etc. The ".C" command can be used to print the actual concentration value, in order to choose a scale factor. Values at or within a source location will be shown as "-1".

#### Prompting For All Parameters

The "IP" command prompts for all problem parameters. The following parameters are not prompted for:

1. The input units ("IR" and "IL" commands).
2. The output options and units ("OW", "OP", "OE" and "OT" commands).
3. The grid map scale parameters ("SC", "SL", "SN", "SX" and "SY" commands).

These parameters retain the same values as before the "IP" command. They all have initial values as shown in Appendix I-B.

#### Saving Parameter Values

The "OD" command saves all problem parameters to a file. The "IL" command restores the saved parameters. The following parameters are not saved:

1. The input units ("IR" and "IL" commands).
2. The output options and units ("OW", "OP", "OE" and "OT" commands).

These parameters retain the same values as before the "IL" command.

REFERENCES

Wilson, J. L. and P. J. Miller. 1978. Two-dimensional Plume in Uniform Ground-Water Flow. Journal of Hydraulics Div. Am. Soc. of Civil Eng. Paper No. 13665. HY4, pp. 503-514.

## Appendix I-A

### List of Commands

<u>COMMAND</u>	<u>PARAMETERS SET OR ACTION TAKEN</u>
A	Dispersivity menu for AX,AY or AX,AR.
AX	Dispersivity in x direction.
AY	Dispersivity in y direction.
AR	Dispersion ratio ( $D_x/D_y = A_x/A_y$ ).
C	Case title.
D	Dispersion coefficient menu for DX,DY or DX,DR or AX,AY or AX,DR.
DX	Dispersion coefficient in x direction.
DY	Dispersion coefficient in y direction.
DR	Dispersion ratio ( $D_x/D_y$ ).
DM	Molecular diffusion coefficient.
E	Exit from program.
G	Decay menu for GG, GL or GT.
GG	Decay coefficient (gamma).
GL	Decay lambda.
GT	Decay half-life time.
H	Help. List all one letter codes.
I	Input menu for IP, IL, IR, or I commands.
IP	Prompt for all parameters.
IL	Load parameters previously stored by OD command.
IR	Read input from another source.
L	Grid limits, LX and LY.
LX	Grid limits in x direction.
LY	Grid limits in y direction.
M	Aquifer thickness.
O	Output menu for OD, OW, OP, OE or OT.
OD	Dump all parameters to disk to be restored by IL command.
OW	Write results to another destination.
OP	Set prompting options.
OE	Set echo options.
OT	Set trace options.
P	Porosity
Q	Source data. (See Table X-3.)
QE	Desired number of subareas for non-point source.
QN	Maximum number of subareas for non-point source.
QM	Change source mass flow rate.

Appendix I-A  
continued

<u>COMMAND</u>	<u>PARAMETERS SET OR ACTION TAKEN</u>
R	Retardation factor.
S	Grid map scale parameters menu for SC, SL, SN, SX or SY.
SC	Grid map multiplier (concentration or steady state)
SL	Line length.
SN	Number of nodes per line.
SX	Node spacing in x direction.
SY	Node spacing in y direction.
T	Sample time.
TE	Steady State Time.
V	Velocity.
XY	Sample x and y location for .C command.
X	Sample x location for .C command.
Y	Sample y location for .C command.
ZM	Aquifer thickness (same as M command).
.C	Display single point concentration.
.D	Display parameters and source data.
.DP	Display parameters.
.DQ	Display souce data.
.DC	Display parameters, source data and single point concentration.
.DG	Display parameters, source data and concentration grid map.
.FF	Page printer. (Form feed.)
.G	Display concentration grid map.
.I	Display input parameters and source data.
.IP	Display input parameters.
.IQ	Display input source data.
.IC	Display input parameters, source data and single point concentration.
.IG	Display input parameters, source data and grid map.
.T	Display of Steady State Time.
.TG	Display of Steady State time grid map.

APPENDIX I-B  
PARAMETER VARIABLES AND COMMANDS

<u>COMMAND</u>	<u>DATA VARIABLE</u>	<u>UNIT VARIABLE</u>	<u>INITIAL UNIT</u>	<u>DESCRIPTION (INITIAL VALUE)</u>
C	HHC1	-	-	Title, any 72 characters.
C	HHC2	-	-	Title, any 72 characters.
C	HHC3	-	-	Title, any 72 characters.
M,ZM*	ZM	UZM	FT	Aquifer thickness.
P	P	-	-	Porosity.
V	V	UV	FT/D	Velocity.
DX	DX	UD	FT2/D	X Dispersion coefficient.
DY	DY	UD	FT2/D	Y Dispersion coefficient.
AX	AX	UA	FT	Dispersivity in x direction.
AY	AY	UA	FT	Dispersivity in y direction.
DR,AR*	DR	-	-	Dispersion ratio, Dx/Dy = Ax/Ay.
DM	DM	UD	FT2/D	Molecular diffusion coefficient, (0.0)
R	R	-	-	Retardation factor.
GG	GG	-	-	Decay coefficient, gamma.
GL	GL	UGL	1/YR	Decay lambda.
GT	GT	UGT	YR	Decay half-life time.
Q	QQXL	UQL	FT	Source minimum x location.
Q	QQXM	UQL	FT	Source maximum x location.
Q	QQYL	UQL	FT	Source minimum y location.
Q	QQYM	QQL	FT	Source maximum y location.
Q	QQSL	UQL	FT	Source minimum size.
Q	QQSM	UQL	FT	Source maximum size.
Q	QQA	UQA	FT2	Source area.
Q	QQT	UQT	DAYS	Source time.
Q	QQV	UQV	FT/D	Source volume flow rate/area.
Q	QQ	UQ	FT3/D	Source volume flow rate.
Q	QQC	UQC	MG/L	Source concentration.
Q	QQR	UQR	LB/FT2/D	Source mass flow rate/area.
Q,QM*	QQM	UQM	LBM/D	Source mass flow rate.
QE	NQE	-	-	Desired accuracy. (0.1)
QN	NQN	-	-	Maximum number of subareas. (100)

\* Either command may be used.

## APPENDIX I-B

continued

<u>COMMAND</u>	<u>DATA VARIABLE</u>	<u>UNIT VARIABLE</u>	<u>INITIAL UNIT</u>	<u>DESCRIPTION (INITIAL VALUE)</u>
T	TC	UTC	DAYS	Sample time.
TE	TE	-	percent	Percent of Steady State.
XC	X\$C	ULC	FT	Sample x location.
YC	Y\$C	ULC	FT	Sample y location.
LX	XGL	ULC	FT	Grid x minimum.
LX	XGM	ULC	FT	Grid x maximum.
LX	XGI	ULC	FT	Grid x increment.
LY	YGL	ULC	FT	Grid y minimum.
LY	YGM	ULC	FT	Grid y maximum.
LY	YGI	ULC	FT	Grid y increment.
SC	SC	-	-	Concentration multiplier. (1)
SL	NSL	-	-	Print line length. (80 characters)
SN	NSN	-	-	Nodes per line. (0)
SX	NSX	-	-	Grid x spacing. (6 characters/node)
SY	NSY	-	-	Grid y spacing. (3 lines/node)
.C	C	UC	MG/L	Result concentration.
IR	LUR	-	-	FORTRAN unit for input. (*)
	LUW	-	-	FORTRAN unit for results. (*)
	BOP , LUP	-	-	FORTRAN unit and option for prompting. (Prompting on, *)
OE	DOE,LUE	-	-	FORTRAN unit and option for echo. (Echo off, *)
OT	BT1-BT8	-	-	Trace options for program development. (All off)
	BATCH	-	-	Bath option: abort command when error occurs. (**)

\* Value for unit depends on system. Unit 1 is used for most microcomputer systems.

\*\* Batch option is set in program and cannot be changed by user.

PART II  
PROGRAM OPERATIONS AND APPLICATIONS

The program begins by prompting the user with 4 options labeled 1,2,3, and -1.

- 1 TO PROMPT FOR ALL REQUIRED PARAMETERS (IP),
- 2 TO LOAD PREVIOUSLY SAVED PARAMETERS (IL),
- 3 TO READ COMMANDS FROM ANOTHER SOURCE (IR),
- 1 TO SET OUTPUT PARAMETERS (O):

In order to enter your hydrogeologic parameters, the user must prompt for them by entering:

? 1

and then pressing RETURN, the program will now ask you for "Three Title Lines". This allows the operator to document the case study being modeled. On each title line a specific characteristic for the case study can be documented, thus distinguishing one computer run from another. For example: Location of Problem, Type of contaminate, Source of data. The PROMPT for Problem title:

THREE TITLE LINES:

THE USER RESPONDS WITH (80 characters per line):

- ? Babylon site, N.Y.
- ? Chloride, single point source
- ? O.S.U. Consultants

Once documented, the program prompts the operator for the hydrogeologic parameters.

The first parameter prompted for is Saturated Thickness.

THICKNESS (FT):

THE USER RESPONDS WITH (5 characters per variable):

? 110

Next porosity is PROMPTED FOR.

POROSITY (UNITLESS):

THE USER RESPONDS WITH (5 characters per variable):

? .35

Then you are PROMPTED for ground-water velocity

VELOCITY (FT/D):

THE USER RESPONDS WITH (5 characters per variable):

? 1.5

Now the program cues the modeler to construct a grid map. It is easiest to begin with a simple grid (i.e. 10 x 10). Superimpose the grid on the potentiometric map of the problem site. Grid squares are then assigned to points of interest. For example, a simplified schematic of a potentiometric map with a source and sample locations is shown in Figure 1. The model orients flow from left to right. Therefore, the map should be oriented perpendicular to the equipotential contours. Prepare a grid such as the 10 x 10 grid shown in Figure 2.

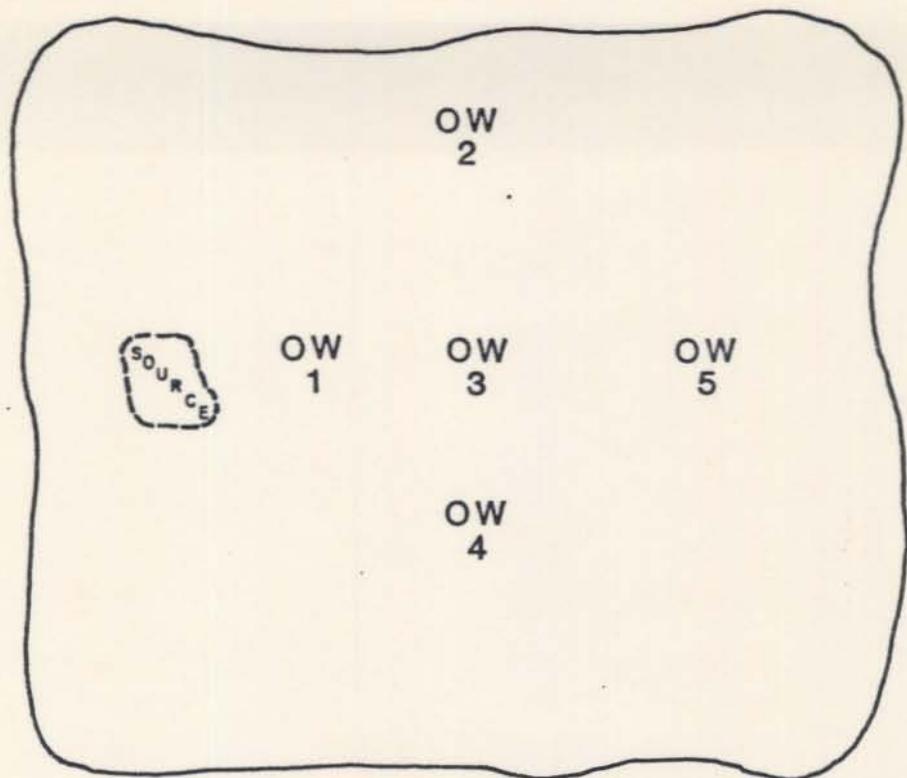


Figure 1  
OW=observation wells for sampling

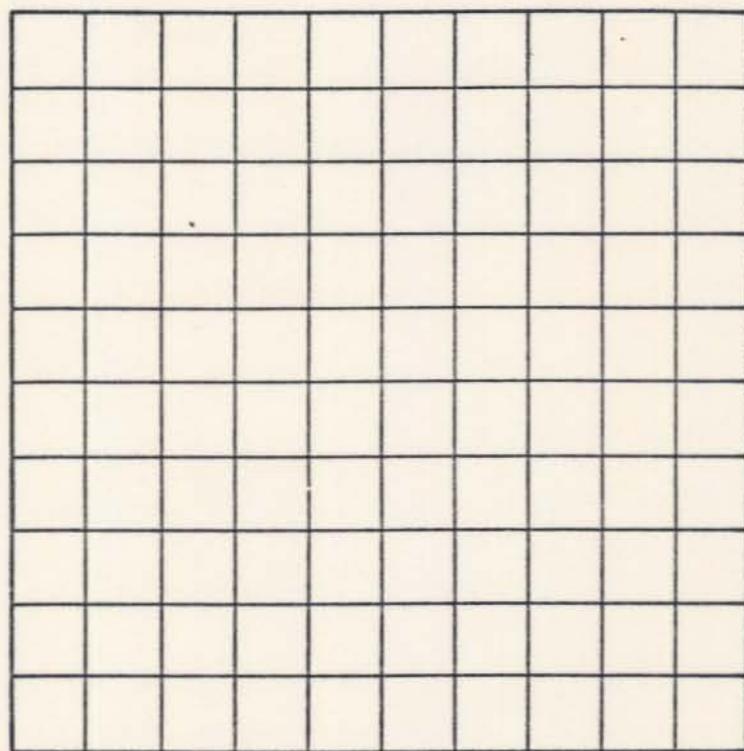


Figure 2

Overlay the grid onto the map as shown in Figure 3. Now the source and each observation well can be assigned to the center of the closest grid square. The location of each value will be referenced by an "X" and a "Y" value. You can arbitrarily set your origin (X=0, Y=0) in the lower left corner of the grid as shown in Figure 3. The source has been assigned to square (500, 1250) in Figure 3 (Over 2 squares in the X direction, up 5 squares in the Y direction). Observation well #1 has been assigned to square (1000, 1250); observation well #2 to (1500, 2000); observation well #3 to (1500, 1250); observation well #4 to (1500, 500); and observation well #5 to square (2250, 1250).

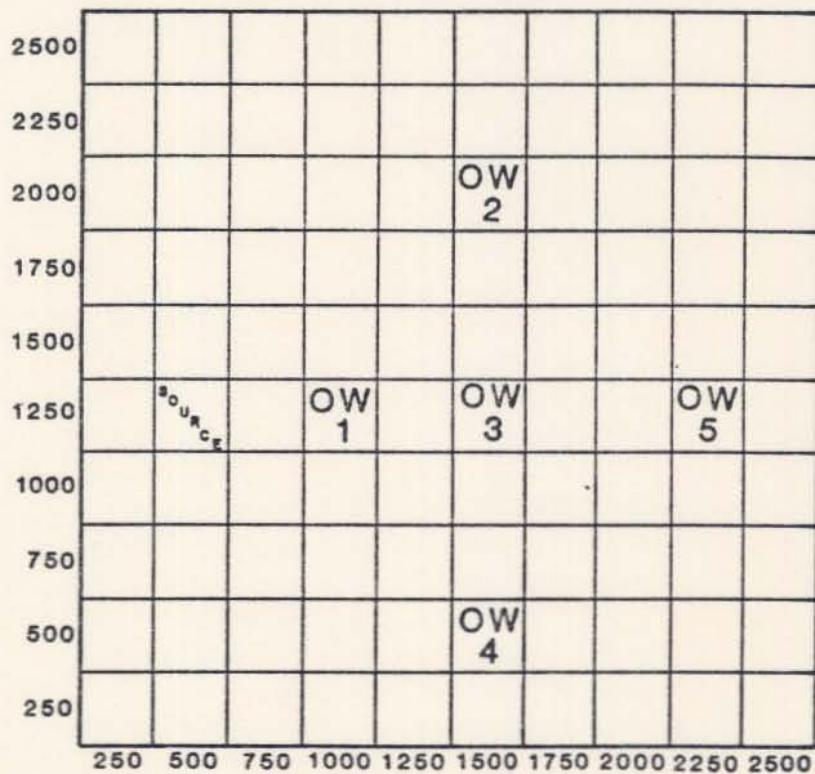


Figure 3

Once the grid map is aligned and coordinates are known for the source and sample locations, specifications can be provided for a grid map display. The map will represent the distribution of concentrations based on the location of the source and observation wells after data entry is completed. In order to generate the data necessary for the grid map display, the following PROMPTS will appear:

GRID MAP X LOCATIONS (FT)  
MINIMUM, (MAXIMUM), (INTERVAL):

For the example used here, THE USER RESPONDS WITH (5 characters per variable):

? 0, 2500, 250

Next the Y dimensions are PROMPTED for. The following PROMPTS will be printed on the screen:

GRID MAP Y LOCATIONS (FT)  
MINIMUM, MAXIMUM, (INTERVAL):

Again, for our example THE USER RESPONDS WITH (5 characters per variable):

? 0, 2500, 250

Now the program PROMPTS the user for information about the contaminant source. The following PROMPTS will appear from the main source menu:

\*\*\*\*\*BEGIN SOURCE INFORMATION\*\*\*\*\*  
CURRENTLY USING 0 OF 10 TIME STEPS  
0 TO END SOURCE INFORMATION  
1 TO ADD POINT SOURCE  
2 TO ADD NON-POINT SOURCE  
-N TO DELETE LAST N TIME STEPS

For our example, THE USER RESPONDS WITH (5 characters per variable):

? 1

In order to preserve continuity in the sequential operation of the program, the source area and flow rate prompting routine shall be explained for a single point source. Multiple and non point source options will be explained later.

After choosing Option 1, the program will prompt for the location of the source and the source area (the approximate surface area that the contaminant source occupies). The following prompts will appear on the screen:

LOCATION:

THE USER RESPONDS WITH (5 characters per variable):

? 500, 1250

SOURCE AREA (FT2):

THE USER RESPONDS WITH (5 characters per variable):

? 1550

Next the program prompts the user for a flow rate. The rate can be calculated by using one of the four options shown below.

Usually this parameter is unknown to the hydrogeologist.

Therefore, this parameter is generally considered to be a variable. Four options are available for determining mass flow rate:

- 1 FOR MASS FLOW RATE (LBM/D),
- 2 FOR MASS/AREA RATE (LB/FT2/D),
- 3 FOR VOLUME FLOW RATE (FT3/D),  
AND CONCENTRATION (MG/L),
- 4 FOR VOLUME/AREA RATE (FT/D),  
AND CONCENTRATION (MG/L):

Option 1 MASS FLOW RATE, (LBM/DAY)

The following PROMPT will appear on the screen:

TIME, MASS FLOW RATE, (CONCENTRATION):

What is required of the user is a time (in days) at which the contaminant begins to flow through the system and the mass flow rate. When modeling only one source, set the time equal to 0. Do not let this confuse you. You are merely designating a reference point in time after which concentrations are to be observed. This concept is doubly

powerful. With one source being modeled, the contaminant can be introduced at time 0, and then again at specified time increments after 0 thus simulating slugs of contaminant flow in response to a series of recharge events.

After the time is requested, a mass flow rate and a concentration must follow (separated by commas). The mass flow rate is in pounds per day. (See Table II-1). Entering a concentration is optional which is indicated by parentheses in the prompt above. If a concentration is known and entered, then a volumetric flow rate will also be calculated. After this information is entered, the program is designed to prompt the user for the same information again. This involves the time step concept which will be discussed after all of the options have been explained. The mass flow rate data can also be entered by using one of the other options:

Option 2 MASS/AREA FLOW RATE (LB/FT<sup>2</sup>/D)

The following PROMPT will appear on the screen:

TIME, MASS/AREA RATE, (CONCENTRATION):

This option is similar to Option 1 except that a mass per area rate is prompted for rather than a mass rate. Again entering concentration is optional.

Option 3 VOLUME FLOW RATE (FT<sup>3</sup>/D and MG/L)

The following PROMPT will appear on the screen:

TIME, VOLUME FLOW RATE, CONCENTRATION:

Again, what is required of the user is similar to the previous options with the exception that the rate is now a volume flow rate. However, entering a concentration is mandatory.

Option 4 VOLUME/AREA FLOW RATE (FT/D and MG/L)

The following PROMPT will appear:

TIME, VOLUME/AREA RATE, CONCENTRATION:

This option is very similar to Option 3.

Now we will return to the main source menu and explain why and how each option is used in conjunction with the mass flow rate. The following is a list of the PROMPTS of the menu:

CURRENTLY USING 0 OF 10 TIME STEPS.  
0 TO END SOURCE INFORMATION.  
1 TO ADD POINT SOURCE,  
2 TO ADD NON-POINT SOURCE,  
-N TO DELETE LAST N TIME STEPS:

Option 0 to end source information.

This option provides the means to stop entering source information and implies that the user wishes to proceed to the next step in the program.

Option 1 To add a point source

This option allows the user to add a contaminant source at a specific X, Y location. In the grid system the point source originates from a specific square whose location has been assigned by the user. Figure 4 is a simplified grid. For example, assume that two single point sources are located at (100,100) and (100,200) in Figure 4. Next, the program prompts the user for the source area. The source area may encompass the whole square or less than the square depending upon the scale of the grid set up by the user. After the source area is entered, the time, flow rate, and concentration is prompted for. If the contaminant source encompasses several adjacent squares and/or parts of squares, then Option 2 should be used.

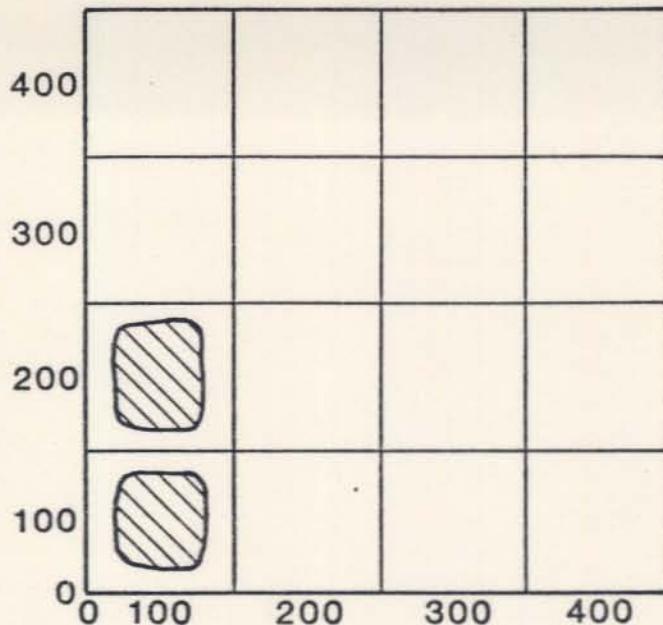


Figure 4

Option 2 To add a non-point source

The power of this option becomes evident when the area of the contamination source is very large with respect to the grid size. In the schematic grid system shown in Figure 5 the source originates from several squares and parts of squares.

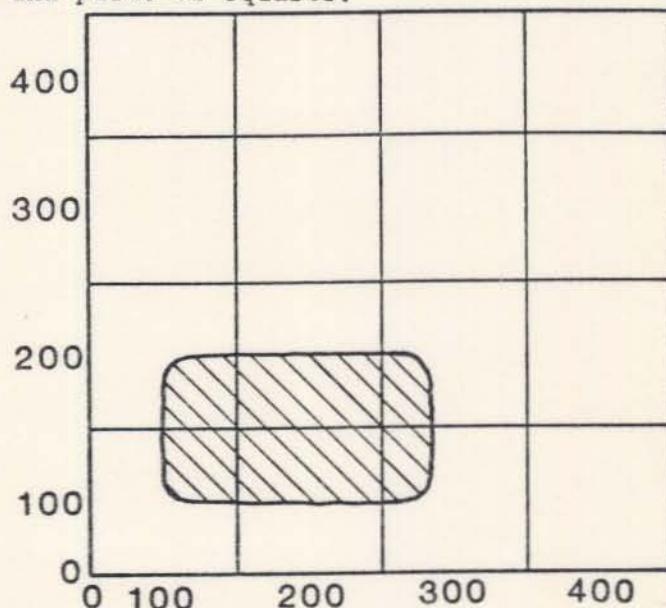


Figure 5

The following prompt will appear:

X LOCATION MINIMUM, MAXIMUM (FT):

For the schematic presented above THE USER WOULD RESPOND WITH  
(5 characters per variable):

? 50, 250

Next the Y location is prompted for. The following prompt will appear:

Y LOCATION, MINIMUM, MAXIMUM (FT):

For the schematic presented above THE USER WOULD RESPOND WITH  
(5 characters per variable):

? 50, 150

Again, the program prompts the user for a time, flow rate and concentration.

Option -N To delete last N time steps

An example will best illustrate the use of this option using several time steps. Let us initially model one point source. Let's assume that we have data for this example over a 20-year period. The contaminant has leached into the groundwater at an average rate of 52 pounds per day during the 20-year period. We also have observed concentrations at several observation wells located at various distances from the source. These data were gathered on an irregular time schedule over 20 years as shown in Table II-1 below. The concentration of the source is also shown for each time period.

Table II-1

Time (days)	Mass Flow rate (lbs/d)	Concentration (mg/l)	Time Step
0	52	100	1
365	52	110	2
548	52	130	3
730	52	160	4
1095	52	160	5
1643	52	180	6
2190	52	190	7
2920	52	200	8
4015	52	210	9
7300	52	250	10

The data is interpreted as follows. Initially, we observe a source concentration of 100 (mg/l). This will be our reference point in time, thus we designate it with a time = 0. This is our first time step. A year later we observe a concentration of 110 (mg/l). We have taken a second step in time which is equal to a period of 1 year. Thus our time step is #2. A year and a half from time = 0, we observe a concentration of 130 (mg/l). We have now taken our third step in time which is equal to a period of .5 years. Thus our time step is designated #3. Two years from our reference point in time we observed a concentration of 160 (mg/l). This is our fourth step in time with a period equal to .5 years. Three years later we again observe a concentration of 160 (mg/l). This is our fifth step in time with a period equal to 1 year. The remainder of the table follows in a similar manner.

In order to enter this data into the computer, Option 1 was selected for the multiple time step example. The following PROMPT will appear:

TIME, MASS FLOW RATE, (CONCENTRATION):

THE USER RESPONDS WITH (5 characters per variable):

? 0, 52, 100

The user enters the respective values and the program responds with another PROMPT:

ENTER 0 TO RETURN TO MAIN SOURCE MENU  
TIME, MASS FLOW RATE, (CONCENTRATION):

THE USER RESPONDS WITH (5 characters per variable):

? 365, 52, 120

Suppose upon entering the data, the user enters an incorrect concentration at the next time step (120 instead of 110 while entering time step #2). To correct for this error, enter "0" to return to the

main source menu. The program responds with:

CURRENTLY USING 2 OF 10 TIME STEPS  
0 TO END SOURCE INFORMATION  
1 TO ADD POINT SOURCE  
2 TO ADD NON POINT SOURCE  
-N TO DELETE LAST N TIME STEPS:

USER RESPONDS WITH (5 characters per variable):

? -1

By entering -1 the information contained in the last time step (#2) is deleted.

The program responds with:

CURRENTLY USING 1 OF 10 TIME STEPS  
0 TO END SOURCE INFORMATION  
1 TO ADD POINT SOURCE  
2 TO ADD NON POINT SOURCE  
-N TO DELETE LAST N TIME STEPS:

THE USER RESPONDS WITH (5 characters per variable):

? 1

In order to continue entering the data, the user must designate the point source again for time step 2 and subsequent time steps. Once this option has been entered, the user has returned to the time, flow rate, concentration mode for entering time step 2 data. When all the data has been entered, the program responds with:

ENTER 0 TO RETURN TO MAIN SOURCE MENU  
TIME, MASS FLOW RATE, CONCENTRATION

THE USER RESPONDS WITH (5 characters per variable):

? 0

The program responds with:

CURRENTLY USING 10 OF 10 TIME STEPS  
0 TO END SOURCE INFORMATION  
1 TO ADD POINT SOURCE  
2 TO ADD NON-POINT SOURCE  
-N TO DELETE LAST N TIME STEPS:

The above prompt confirms that the mass flow rate source has been

entered for all 10 time steps. In order to end source information  
THE USER RESPONDS WITH (5 characters per variable):

? 0

The program informs the user of this by the following statement:

\*\*\*\*\*END SOURCE INFORMATION\*\*\*

Next, the program prompts for a sample time:

SAMPLE TIME (DAYS)

THE USER RESPONDS WITH (5 characters per variable):

? 2330

The sample time is a point in time, after time 0, at which concentrations are to be computed and plotted on the grid. However, these concentrations will approach equilibrium (steady state) when the concentrations remain constant over time at a specific location on the grid. This is referred to as a "steady state" condition. If the user wishes to compute the concentrations throughout the grid under this condition,

THE USER RESPONDS WITH (5 characters per variable):

? -1

The last prompts are for retardation, decay, and dispersion. Usually, the user lacks information about these parameters. Suppose the user has values for retardation and decay only.

The retardation PROMPT:

RETARDATION (UNITLESS)

THE USER RESPONDS WITH:

? 1

This indicates that the source is not "retarded" or influenced in any way by sorption on surfaces within the

earth material as it travels through the system.

The PROMPT for decay information is next:

- 0 FOR NO DECAY
- 1 FOR DECAY COEFFICIENT (GG)
- 2 FOR DECAY LAMBDA (GL)
- 3 FOR DECAY HALF-LIFE (GT)

Initially THE USER SHOULD RESPOND WITH (5 characters per variable):

? 0

Now the user has reduced the number of unknowns to 1 variable, dispersion. This parameter controls the shape of the plume. In other words, what is the rate at which the contaminant disperses in the X direction versus the rate it disperses in the Y direction? If the rates are the same then this ratio of X:Y (the dispersion ratio) equals 1. The user has 4 options for entering dispersion values depending upon the information available. The following is the list of prompt options for dispersion:

- 1 FOR X AND Y DISPERSION (DX, DY),
- 2 FOR X DISPERSION AND DISPERSION RATIO (DX, DR),
- 3 FOR X AND Y DISPERSIVITY (AX, AY),
- 4 FOR X DISPERSIVITY AND DISPERSION RATIO (AX, DR),  
(USE DM FOR MOLECULAR DIFFUSION)

In order to consider these options (1-4), the user should refer to Table I-1 for the definition of dispersion. The options are described as follows:

Option 1 Allows the user to enter values for dispersion in the X and Y directions. The dispersion ratio and the X and Y dispersivities will be calculated for you.

Option 2 Allows the user to enter values for dispersion in the X direction and the dispersion ratio. Dispersion in the Y

direction and the X and Y dispersivities will be calculated for the user.

Option 3 Allows the user to enter the X and Y dispersivities. The X and Y dispersions and the dispersion ratio will be calculated automatically.

Option 4 Allows the user to enter the X dispersivity and the dispersion ratio. The Y dispersivity and the X and Y dispersions are calculated for the user.

If the dimensions of an existing plume can be measured, then this ratio of X and Y using Option 1 can be used as a starting point in order to generate an initial value for the dispersion ratio. The program responds with:

- 1 FOR X AND Y DISPERSION (DX, DY)
- 2 FOR X DISPERSION AND DISPERSION RATIO (DX,DR)
- 3 FOR X AND Y DISPERSIVITY (AX,AY)
- 4 FOR X DISPERSIVITY AND DISPERSION RATIO (AX,DR)  
(USE DM FOR MOLECULAR DIFFUSION)

THE USER RESPONDS WITH (5 characters per variable):

? 1

THE PROGRAM RESPONDS WITH;

X DISPERSION (FT2/D)

THE USER RESPONDS WITH (5 characters per variable):  
Y DISPERSION (FT2/D)

THE USER RESPONDS WITH (5 characters per variable).

press return. The Display commands are used to reproduce the values of the data which you have entered, or to produce the solution as a single point concentration or as the grid map in Figure 3 showing all of the concentrations. The Display commands are:

- .C      Display a single point (x,y) concentration
- .D      Display all parameters
- .G      Display grid map concentrations
- .I      Display input parameters
- .DG     Display all parameters and grid map concentrations
- .T      Display of Steady State Time
- .TG     Display grid map of Steady State Times

If the user enters .D, all parameters and values are displayed as entered for the single point example. The display is shown in Appendix A. Once displayed, the user can enter .G which will display grid map of concentrations for the solution (See Appendix A). Once the solution has been completed, the user can store the data. In order to store the data used in this example, the "OD" command is used. The following response will appear on the screen:

DUMP FILE UNIT (6 TO 10):

This means that a total of 5 different sets of data may be saved (numbered 6,7,8,9.and 10). The user must now assign a number (either 6,7,8,9, or 10) to the data set. Once the number is chosen, (i.e. 6), the input data is copied to the disk under the Fortran file name with that number.

At this point, the following PROMPT appears:

COMMAND

The user now has three choices; end the program by entering E; initiate a new problem by using the COMMAND I to recall the list of PROMPT options; or change selected parameters by using an EDIT command. These can be listed by

entering the HELP COMMAND, H. Some of the more useful edit commands are listed:

D	Dispersion
L	Grid Limits
M	Aquifer Thickness
P	Porosity
R	Retardation
V	Ground water velocity
Q	Source
QM	Source mass rate only
TE	Steady State Time

For example, the user will commonly want to make changes in the source term (Q), Dispersion (D) or Retardation (R).

Suppose the user ends the program using the COMMAND E and returns later, wanting to modify the data saved in data set 6. When the program begins, the initial PROMPT appears:

```
1 TO PROMPT FOR ALL REQUIRED PARAMATERS (IP),
2 TO LOAD PREVIOUSLY SAVED PARAMETERS (IL),
3 TO READ COMMANDS FROM ANOTHER SOURCE (IR),
-1 TO SET OUTPUT PARAMETERS (O)
```

To load information in data set 6, THE USER SHOULD RESPOND WITH (5 characters per variable):

```
? 2
```

THE PROGRAM RESPONSE IS:

```
LOAD FILE UNIT (6 TO 10):
```

The user responds with the data set number to be loaded. In this example, THE USER RESPONDS WITH (5 characters per variable):

```
? 6
```

The input parameters that had been previously saved in data set 6 are now loaded into the program.

THE PROGRAM RESPONDS WITH:

```
COMMAND
```

IN ORDER TO REVIEW THE DATA IN DATA SET 6, THE USER RESPONDS

WITH (5 characaters per variable):

? .I

Once the data set is loaded from the file, the concentrations at the observation wells can be matched to those of the computer run and the accuracy of the dispersion ratio can be tested.

The dispersion can be changed by entering the EDIT command D. One of the four options to enter dispersion is to be selected. The user will enter the new dispersion parameters indicated in the PROMPT. By varying the dispersion ratio, a "best fit" can be attempted. The process of matching computed and observed data is referred to as calibration. The procedure for changing one variable while all others are held constant is referred to as sensitivity analysis.

Once the general shape of the plume is achieved by adjusting the dispersion ratio, the velocity or retardation can be varied in order to shorten or lengthen the plume. An example of a sensitivity analysis run of retardation for calibration of dispersion is shown in Appendix B. Retardation must be greater than 1 in order to represent the effects of sorption phenomena. Let us suppose that the concentrations at X = 1750, Y = 750,100,1250, are all slightly higher than "actual" concentrations. By increasing the retardation, these values will be lowered for X = 1750. If values should be increased, then velocity should be increased instead. In the example, in Appendix B, retardation was changed from 1 to 1.3. The resulting concentrations at X = 1750, Y = 750,100,1250 have all slightly lowered in value. Retardation effects become more pronounced after a certain traveled distance and time.

Once the changes in Dispersion and Retardation are complete, the user will use the Display (.D, .C, .G, .DG) COMMANDS in order to

view the new solution on the screen. The user can save the new data for the corresponding solution by using the OD or I COMMANDS as described earlier.

The user may decide to begin a new problem, but will introduce several contaminant sources. The parameters and grid used in Figure 3 and Appendix A can also be used here except for the addition of another source using the main source menu. The step by step procedure and output are shown in Appendix C.

There are two point sources located at  $X = 500$ ,  $Y = 500$ , and  $X = 500$ ,  $Y = 1250$  (See Figure 3 for grid location). The hydrologic parameters are identical, with the exception of one important change. Notice that the number of time steps (i.e. the number of start times for each source) is now 5. A total of 10 time steps and/or sources can be used. By using two sources, only 5 time steps are available. Combining both sources is essentially the same as over-laying the grid solution for each of the individual plumes on one another and adding the values which appear in the same grid square. The plumes begin to overlap at  $X = 250$ ,  $Y = 1250$ , to 1500. This feature is especially powerful and time saving.

Alternatively, the user may choose a non point source as shown in Figure 5 (large source area) rather than a multiple point source. To do so, Option 2 of the main source menu was used. The step by step procedure and output are shown in Appendix D.

## STEADY-STATE

In certain instances, it may be desirable to determine both the concentration distribution of the plume after it has achieved equilibrium with its surroundings and the time required to reach that equilibrium. This time is referred to as "steady-state". The FPLUME model allows computation of these steady-state concentrations in the following manner:

- (1) In response to the programs' "COMMAND?" prompt, a "T" is keyed in.
- (2) The program then prompts for a time to be input. A value of "-1" (for steady-state) is keyed in.
- (3) The program then prompts for a "COMMAND?". At this point the user can (a) print out the map of the plume using ".G" command or, (b) determine the time (in days) required for the system to reach equilibrium using the "TE" command.

When the "TE" command is used, the program prompts for input of "% STEADY STATE (UNITLESS):"? The input value should be between 1 and 100%. The higher the percentage, the more accurate the computation of the time required to achieve steady-state. Normally, 90% or 95% is used. After a value has been keyed in, the program again displays the "COMMAND?" prompt. The user then keys in ".T", and the program then prompts for the X and Y coordinates of an observation point. Once the desired coordinates have been entered, the program echo-prints the % steady-state, the X location, the Y location and the time (in days) required for the system to reach steady-state. The ".TG" command prints a grip map of the time (in days) required to reach the steady concentrations. The "S" or "SC" commands may be used to adjust the grid multiplier so that the values on the map are not written in exponential form.

Table of Contents  
for Appendices

Appendix A - Single Point Source.....	II-A-1
Appendix B - Single Point Source Sensitivity Analysis.....	II-B-1
Appendix C - Two Point Sources.....	II-C-1
Appendix D - Non Point Source.....	II-D-1
Appendix E - Program Source for Kaypro 2.....	II-E-1
Appendix F - Program Source for IBM PC.....	II-F-1

SINGLE POINT SOURCE

APPENDIX II-A

COMMAND>.D

SINGLE  
POINT  
SOURCE

THICKNESS = 110.000 FT  
POROSITY = .350000  
VELOCITY = 1.50000 FT/D

X DISPERSION = 105.000 FT2/D  
Y DISPERSION = 21.0000 FT2/D  
X DISPERSIVITY = 70.0000 FT  
Y DISPERSIVITY = 14.0000 FT  
DISPERSION RATIO= 5.00000  
MOL. DIFFUSION = 0.00000 FT2/D

RETARDATION = 1.000000  
DECAY GAMMA = 1.000000  
DECAY LAMBDA = 0.000000 1/YR

ACCURACY = .100000E+00  
MAXIMUM DIVISION= 100

X, Y LOCATION = 500.000 , 1250.000 FT  
SOURCE AREA = 1550.000 FT2

START TIME (DAYS)	VOLUME/ AREA RATE (FT/D)	VOLUME FLOW RATE (FT3/D)	SOURCE CONCENTR. (MG/L)	MASS/AREA RATE (LB/FT2/D)	MASS FLOW RATE (LBM/D)
0.00000	5.37394	8329.60	100.0000	.335484E-01	52.0000
365.000	4.88540	7572.36	110.0000	.335484E-01	52.0000
548.000	4.13380	6407.39	130.0000	.335484E-01	52.0000
730.000	3.35971	5206.00	160.0000	.335484E-01	52.0000
1095.000	3.35871	5206.00	160.0000	.335484E-01	52.0000
1641.000	2.98552	4627.56	180.0000	.335484E-01	52.0000
2190.000	2.82839	4384.00	190.0000	.335484E-01	52.0000
2920.000	2.68697	4164.80	200.0000	.335484E-01	52.0000
4015.000	2.55902	3766.48	210.0000	.335484E-01	52.0000
7300.000	2.14957	3331.84	250.0000	.335484E-01	52.0000

COMMAND>.G

SAMPLE TIME = 2333.30 DAYS  
X SCALE ( 1.000000 FT )  
Y SCALE ( 1.000000 FT )  
CONCENTRATION ( 1.000000 MG/L )

Y	X 0	250	500	750	1000	1250	1500	1750	2000	2250	2500
2500	0	0	0	0	0	0	0	0	0	0	0
2250	0	0	0	0	0	0	0	0	0	0	0
2000	0	0	0	0	0	0	0	0	0	0	0
1750	0	0	0	0	0	0	1	1	2	2	3
1500	0	0	1	3	7	9	11	13	13	13	14
1250	0	2	-1	69	49	40	34	31	28	26	24
1000	0	0	1	3	7	9	11	13	13	13	14
750	0	0	0	0	0	0	1	1	2	2	3
500	0	0	0	0	0	0	0	0	0	0	0
250	0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0	0

WORST APPROXIMATION = +- 5.66 %.  
1 SOURCE(S) SHOWN AS "-1".

SENSITIVITY ANALYSIS  
SINGLE POINT SOURCE  
APPENDIX II-B

TWO POINT SOURCES

APPENDIX II-C

COMMAND>.DG

SINGLE POINT SOURCE  
SENSITIVITY ANALYSIS  
DISPERSION

THICKNESS = 110.000 FT  
POROSITY = .350000  
VELOCITY = 1.50000 FT/D

X DISPERSION = 105.000 FT<sup>2</sup>/D  
Y DISPERSION = 21.0000 FT<sup>2</sup>/D  
X DISPERSIVITY = 70.0000 FT  
Y DISPERSIVITY = 14.0000 FT  
DISPERSION RATIO = 5.00000  
MOL. DIFFUSION = 0.00000 FT<sup>2</sup>/D

RETARDATION = 1.30000  
DECAY GAMMA = 1.000000  
DECAY LAMBDA = 0.000000 1/YR

ACCURACY = .100000E+00  
MAXIMUM DIVISION= 100

X, Y LOCATION	=	500.000	,	1250.00	FT							
SOURCE AREA	=	1550.00		FT <sup>2</sup>								
START TIME	VOLUME/	VOLUME	SOURCE	MASS/AREA	MASS FLOW							
(DAYS )	(FT/D )	(FT <sup>3</sup> /D )	(MG/L )	(LB/FT <sup>2</sup> /D)	(LB/M/D )							
0.00000	5.37394	9329.60	100.0000	.335484E-01	52.0000							
365.000	4.89540	7572.36	110.0000	.335484E-01	52.0000							
548.000	4.13380	4407.39	130.0000	.335484E-01	52.0000							
730.000	3.35871	5206.00	160.0000	.335484E-01	52.0000							
1095.00	3.35871	5206.00	160.0000	.335484E-01	52.0000							
1641.00	2.98552	4627.56	190.0000	.335484E-01	52.0000							
2190.00	2.82839	4384.00	190.0000	.335484E-01	52.0000							
2920.00	2.68697	4164.90	200.0000	.335484E-01	52.0000							
4015.00	2.55902	3966.48	210.0000	.335484E-01	52.0000							
7300.00	2.14957	3331.94	250.0000	.335484E-01	52.0000							

SAMPLE TIME = 2333.30 DAYS  
X SCALE < 1.000000 FT  
Y SCALE < 1.000000 FT  
CONCENTRATION < 1.000000 MG/L

Y	X	250	500	750	1000	1250	1500	1750	2000	2250	2500
2500	0	0	0	0	0	0	0	0	0	0	0
2250	0	0	0	0	0	0	0	0	0	0	0
2000	0	0	0	0	0	0	0	0	0	0	0
1750	0	0	0	0	0	0	1	1	2	2	2
1500	0	0	1	3	7	9	11	12	13	13	12
1250	0	2	-1	69	49	40	34	30	27	24	21
1000	0	0	1	3	7	9	11	12	13	13	12
750	0	0	0	0	0	0	1	1	2	2	2
500	0	0	0	0	0	0	0	0	0	0	0
250	0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0	0

WORST APPROXIMATION = +- 5.66 %.  
1 SOURCE(S) SHOWN AS "-1".

GROUNDWATER PLUME CALCULATION PROGRAM  
 D.C. KENT, HYDROGEOLOGIST  
 FRED WITZ, PROGRAMMER  
 GEOLOGY DEPARTMENT, OKLAHOMA STATE UNIVERSITY  
 FORTRAN VERSION 1.0 (1983, MAY)

1 TO PROMPT FOR ALL REQUIRED PARAMETERS (IP),  
 2 TO LOAD PREVIOUSLY SAVED PARAMETERS (IL),  
 3 TO READ COMMANDS FROM ANOTHER SOURCE (IR),  
 -1 TO SET OUTPUT PARAMETERS (O):  
?1

THREE TITLE LINES:  
?TWO

?POINT

?SOURCES

THICKNESS (FT ):  
?110

POROSITY (UNITLESS):  
?.35

VELOCITY (FT/D ):  
?1.5

GRID MAP X LOCATIONS (FT ),  
MINIMUM, (MAXIMUM), (INTERVAL):  
?0,2500,250

GRID MAP Y LOCATIONS (FT ),  
MINIMUM, MAXIMUM, (INTERVAL):  
?0,2500,250

\*\*\*\* BEGIN SOURCE INFORMATION \*\*\*\*  
CURRENTLY USING 0 OF 10 TIME STEPS.  
0 TO END SOURCE INFORMATION,  
1 TO ADD POINT SOURCE,  
2 TO ADD NON-POINT SOURCE,  
-N TO DELETE LAST N TIME STEPS:  
?1

X LOCATION, Y LOCATION (FT ):  
?500,1000

SOURCE AREA (FT2 ):  
?1550

1 FOR MASS FLOW RATE (LBM/D ),  
2 FOR MASS/AREA RATE (LB/FT2/D ),  
3 FOR VOLUME FLOW RATE (FT3/D ),  
AND CONCENTRATION (MG/L ),  
4 FOR VOLUME/AREA RATE (FT/D ),  
AND CONCENTRATION (MG/L ):

?1

TIME, MASS FLOW RATE, (CONCENTRATION):  
?0,52,100

ENTER 0 TO RETURN TO MAIN SOURCE MENU;  
TIME, MASS FLOW RATE, (CONCENTRATION):  
?730,52,160

ENTER 0 TO RETURN TO MAIN SOURCE MENU;  
TIME, MASS FLOW RATE, (CONCENTRATION):  
?2190,52,170

ENTER 0 TO RETURN TO MAIN SOURCE MENU;  
TIME, MASS FLOW RATE, (CONCENTRATION):  
?4015,52,210

ENTER 0 TO RETURN TO MAIN SOURCE MENU;  
TIME, MASS FLOW RATE, (CONCENTRATION):  
?7300,52,250

ENTER 0 TO RETURN TO MAIN SOURCE MENU;  
TIME, MASS FLOW RATE, (CONCENTRATION):  
?0

CURRENTLY USING 5 OF 10 TIME STEPS.  
0 TO END SOURCE INFORMATION,  
1 TO ADD POINT SOURCE,  
2 TO ADD NON-POINT SOURCE,  
-N TO DELETE LAST N TIME STEPS:  
?1

X LOCATION, Y LOCATION (FT ):  
?500,1750

SOURCE AREA (FT2 ):  
?1550

1 FOR MASS FLOW RATE (LBM/D ),  
2 FOR MASS/AREA RATE (LB/FT2/D ),  
3 FOR VOLUME FLOW RATE (FT3/D ),  
AND CONCENTRATION (MG/L ),  
4 FOR VOLUME/AREA RATE (FT/D ),  
AND CONCENTRATION (MG/L ):

?1

TIME, MASS FLOW RATE, (CONCENTRATION):  
?0,52,100

ENTER 0 TO RETURN TO MAIN SOURCE MENU;  
TIME, MASS FLOW RATE, (CONCENTRATION):  
?730,52,160

ENTER 0 TO RETURN TO MAIN SOURCE MENU;  
TIME, MASS FLOW RATE, (CONCENTRATION):  
?2190,52,190

ENTER 0 TO RETURN TO MAIN SOURCE MENU;  
TIME, MASS FLOW RATE, (CONCENTRATION):  
?4015,52,210

ENTER 0 TO RETURN TO MAIN SOURCE MENU;  
TIME, MASS FLOW RATE, (CONCENTRATION):  
?7300,52,250

ENTER 0 TO RETURN TO MAIN SOURCE MENU;  
TIME, MASS FLOW RATE, (CONCENTRATION):  
?0

CURRENTLY USING 10 OF 10 TIME STEPS.  
0 TO END SOURCE INFORMATION,  
1 TO ADD POINT SOURCE,  
2 TO ADD NON-POINT SOURCE,  
-N TO DELETE LAST N TIME STEPS:  
?-10

\*\*\*\*\* END SOURCE INFORMATION \*\*\*\*\*  
-1 FOR STEADY STATE,  
SAMPLE TIME (DAYS) :  
?-1

RETARDATION (UNITLESS):  
?1

0 FOR NO DECAY,  
1 FOR DECAY COEFFICIENT, GAMMA (GG),  
2 FOR DECAY LAMBDA (GL),  
3 FOR DECAY HALF-LIFE (GT):  
?0

1 FOR X AND Y DISPERSION (DX, DY),  
2 FOR X DISPERSION AND DISPERSION RATIO (DX, DR),  
3 FOR X AND Y DISPERSIVITY (AX, AY),  
4 FOR X DISPERSIVITY AND DISPERSION RATIO (AX, DR),  
(USE DM FOR MOLECULAR DIFFUSION):  
?2

X DISPERSION (FT2/D) :  
?105

DISPERSION RATIO (UNITLESS):  
?5

COMMAND?

.DG

TWO  
POINT  
SOURCES

THICKNESS = 110.000 FT  
POROSITY = .350000  
VELOCITY = 1.50000 FT/D

X DISPERSION = 105.000 FT2/D  
Y DISPERSION = 21.0000 FT2/D  
X DISPERSIVITY = 70.0000 FT  
Y DISPERSIVITY = 14.0000 FT  
DISPERSION RATIO= 5.00000  
MOL. DIFFUSION = 0.00000 FT2/D

RETARDATION = 1.000000  
DECAY GAMMA = 1.000000  
DECAY LAMBDA = 0.000000 1/YR

ACCURACY = .100000E+00  
MAXIMUM DIVISION= 100

X, Y LOCATION = 500.000 , 1000.000 FT  
SOURCE AREA = 1550.00 FT2  
START TIME VOLUME/ SOURCE MASS/AREA MASS FLOW  
TIME AREA RATE FLOW RATE CONCENTR. RATE RATE  
(DAYS ) (FT/D ) (FT3/D ) (MG/L ) (LB/FT2/D) (LBM/D )  
0.00000 5.37394 9329.60 100.0000 .335484E-01 52.0000  
730.000 3.35871 5206.00 160.0000 .335484E-01 52.0000  
2190.00 2.82839 4384.00 190.0000 .335484E-01 52.0000  
4015.00 2.55902 3966.48 210.0000 .335484E-01 52.0000  
7300.00 2.14957 3331.84 250.0000 .335484E-01 52.0000

X, Y LOCATION = 500.000 , 1750.000 FT  
SOURCE AREA = 1550.00 FT2  
START TIME VOLUME/ SOURCE MASS/AREA MASS FLOW  
TIME AREA RATE FLOW RATE CONCENTR. RATE RATE  
(DAYS ) (FT/D ) (FT3/D ) (MG/L ) (LB/FT2/D) (LBM/D )  
0.00000 5.37394 9329.60 100.0000 .335484E-01 52.0000  
730.000 3.35871 5206.00 160.0000 .335484E-01 52.0000  
2190.00 2.82839 4384.00 190.0000 .335484E-01 52.0000  
4015.00 2.55902 3966.48 210.0000 .335484E-01 52.0000  
7300.00 2.14957 3331.84 250.0000 .335484E-01 52.0000

SAMPLE TIME = STEADY STATE  
X SCALE ( 1.000000 FT )  
Y SCALE ( 1.000000 FT )  
CONCENTRATION ( 1.000000 MG/L )

	X	0	250	500	750	1000	1250	1500	1750	2000	2250	2500
Y		0	0	0	0	0	0	0	0	0	0	0
2500	0	0	0	0	0	0	0	0	0	0	0	0
2250	0	0	0	0	0	0	0	1	1	2	2	3
2000	0	0	1	3	7	9	11	13	13	14	14	14
1750	0	2	-1	69	49	40	34	31	28	26	25	25
1500	0	0	1	3	7	10	12	14	15	16	17	17
1250	0	0	1	3	7	10	12	14	15	16	17	17
1000	0	2	-1	69	49	40	34	31	28	26	25	25
750	0	0	1	3	7	9	11	13	13	14	14	14
500	0	0	0	0	0	0	0	1	1	2	2	3
250	0	0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0	0	0

WORST APPROXIMATION = +- 1.06 %.  
2 SOURCE(S) SHOWN AS "-1".

COMMAND?E

END OF PLUME PROGRAM.  
GOODBYE. STOP

NON POINT SOURCE

APPENDIX II-D

GROUNDWATER PLUME CALCULATION PROGRAM  
 D.C. KENT, HYDROGEOLOGIST  
 FRED WITZ, PROGRAMMER  
 GEOLOGY DEPARTMENT, OKLAHOMA STATE UNIVERSITY  
 FORTRAN VERSION 1.0 (1983, MAY)

1 TO PROMPT FOR ALL REQUIRED PARAMETERS (IP),  
 2 TO LOAD PREVIOUSLY SAVED PARAMETERS (IL),  
 3 TO READ COMMANDS FROM ANOTHER SOURCE (IR),  
 -1 TO SET OUTPUT PARAMETERS (O):  
 ?1

THREE TITLE LINES:

?NON

?POINT

?SOURCE

THICKNESS (FT ):  
 ?110

POROSITY (UNITLESS):  
 ?.35

VELOCITY (FT/D ):  
 ?1.5

GRID MAP X LOCATIONS (FT ),  
 MINIMUM, (MAXIMUM), (INTERVAL):  
 ?0,2500,250

GRID MAP Y LOCATIONS (FT ),  
 MINIMUM, MAXIMUM, (INTERVAL):  
 ?0,2500,250

\*\*\*\* BEGIN SOURCE INFORMATION \*\*\*\*  
 CURRENTLY USING 0 OF 10 TIME STEPS.  
 0 TO END SOURCE INFORMATION,  
 1 TO ADD POINT SOURCE,  
 2 TO ADD NON-POINT SOURCE,  
 -N TO DELETE LAST N TIME STEPS:  
 ?2

X LOCATION MINIMUM, MAXIMUM (FT ):  
 ?350,800

Y LOCATION MINIMUM, MAXIMUM (FT ):  
 ?1000,1300

1 FOR MASS FLOW RATE (LBM/D ),  
 2 FOR MASS/AREA RATE (LB/FT<sup>2</sup>/D ),  
 3 FOR VOLUME FLOW RATE (FT<sup>3</sup>/D ),  
 AND CONCENTRATION (MG/L ),  
 4 FOR VOLUME/AREA RATE (FT/D ),  
 AND CONCENTRATION (MG/L ):  
 ?1

TIME, MASS FLOW RATE, (CONCENTRATION):  
 ?0,52,200

ENTER 0 TO RETURN TO MAIN SOURCE MENU;  
 TIME, MASS FLOW RATE, (CONCENTRATION):  
 ?7730,52,300

ENTER 0 TO RETURN TO MAIN SOURCE MENU;  
 TIME, MASS FLOW RATE, (CONCENTRATION):  
 ?2190,52,400

ENTER 0 TO RETURN TO MAIN SOURCE MENU;  
 TIME, MASS FLOW RATE, (CONCENTRATION):  
 ?74015,52,425

ENTER 0 TO RETURN TO MAIN SOURCE MENU;  
 TIME, MASS FLOW RATE, (CONCENTRATION):  
 ?7300,52,500

ENTER 0 TO RETURN TO MAIN SOURCE MENU;  
 TIME, MASS FLOW RATE, (CONCENTRATION):  
 ?0

CURRENTLY USING 5 OF 10 TIME STEPS.  
 0 TO END SOURCE INFORMATION,  
 1 TO ADD POINT SOURCE,  
 2 TO ADD NON-POINT SOURCE,  
 -N TO DELETE LAST N TIME STEPS:  
 ?0

\*\*\*\* END SOURCE INFORMATION \*\*\*\*  
 -1 FOR STEADY STATE,  
 SAMPLE TIME (DAYS ):  
 ?-1

RETARDATION (UNITLESS):  
 ?1

0 FOR NO DECAY,  
 1 FOR DECAY COEFFICIENT, GAMMA (GG),  
 2 FOR DECAY LAMBDA (GL),  
 3 FOR DECAY HALF-LIFE (GT):  
 ?0

1 FOR X AND Y DISPERSION (DX, DY),  
 2 FOR X DISPERSION AND DISPERSION RATIO (DX, DR),  
 3 FOR X AND Y DISPERSIVITY (AX, AY),  
 4 FOR X DISPERSIVITY AND DISPERSION RATIO (AX, DR),  
 (USE DM FOR MOLECULAR DIFFUSION):  
 ?2

X DISPERSION (FT<sup>2</sup>/D ):  
 ?105

DISPERSION RATIO (UNITLESS):  
 ?5

COMMAND?.DG

NON  
POINT  
SOURCE

THICKNESS = 110.000 FT  
POROSITY = .350000  
VELOCITY = 1.50000 FT/D

X DISPERSION = 105.000 FT2/D  
Y DISPERSION = 21.0000 FT2/D  
X DISPERSIVITY = 70.0000 FT  
Y DISPERSIVITY = 14.0000 FT  
DISPERSION RATIO = 5.00000  
MOL. DIFFUSION = 0.00000 FT2/D

RETARDATION = 1.000000  
DECAY GAMMA = 1.000000  
DECAY LAMBDA = 0.000000 1/YR

ACCURACY = .100000E+00  
MAXIMUM DIVISION = 100

X LOCATION = 350.000 TO 800.000 FT  
Y LOCATION = 1000.000 TO 1300.00 FT  
SOURCE AREA = 135000. FT2

START TIME (DAYS)	VOLUME/ AREA RATE (FT/D)	VOLUME FLOW RATE (FT3/D)	SOURCE CONCENTR. (MG/L)	MASS/AREA RATE (LB/FT2/D)	MASS FLOW RATE (LBM/D)
0.000000	.308504E-01	4164.80	200.000	.385185E-03	52.0000
730.000	.205669E-01	2776.53	300.000	.385185E-03	52.0000
2190.00	.154252E-01	2082.40	400.000	.385185E-03	52.0000
4015.00	.145178E-01	1959.91	425.000	.385185E-03	52.0000
7300.00	.123401E-01	1655.92	500.000	.385185E-03	52.0000

SAMPLE TIME = STEADY STATE  
X SCALE ( 1.000000 FT )  
Y SCALE ( 1.000000 FT )  
CONCENTRATION ( 1.000000 MG/L )

Y	0	250	500	750	1000	1250	1500	1750	2000	2250	2500
2500	0	0	0	0	0	0	0	0	0	0	0
2250	0	0	0	0	0	0	0	0	0	0	0
2000	0	0	0	0	0	0	0	0	0	0	0
1750	0	0	0	0	0	0	0	0	1	1	1
1500	0	0	0	1	2	4	5	6	7	8	9
1250	0	1	-1	-1	33	30	27	26	24	23	23
1000	0	1	-1	-1	24	23	23	22	21	20	20
750	0	0	0	0	1	2	3	4	5	6	6
500	0	0	0	0	0	0	0	0	0	1	1
250	0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0	0

WORST APPROXIMATION = +- 9.00 %.  
4 SOURCE(S) SHOWN AS "-1".

II-E-1

PROGRAM SOURCE FOR KAYPRO 2

APPENDIX II-E

\*\*\*\*\* TSO FOREGROUND HARDCOPY \*\*\*\*\*  
DSNAME=U11236C.FPLUME.CNTL

C GROUNDWATER PLUME CALCULATION PROGRAM 00000010  
C D.C. KENT, HYDROGEOLOGIST, PRINCIPAL INVESTIGATOR 00000020  
C FRED WITZ, PROGRAMMER 00000030  
C GEOLOGY DEPARTMENT, OKLAHOMA STATE UNIVERSITY 00000040  
C STILLWATER, OKLAHOMA, 74078 00000050  
C FORTRAN VERSION (SEE VERSION BELOW) 00000060  
C TESTED WITH: 00000070  
C MICROSOFT FORTRAN ON KAYPRO II (66 STANDARD) 00000080  
C ===== DECLARATIONS ===== 00000090  
LOGICAL\*1 BERR, BATCH,BOP , BOE ,BTSS 00000100  
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8 00000110  
LOGICAL\*1 BBT , B , BIP 00000120  
INTEGER\*4 00000130  
+ HHCMD 00000140  
+ , H , HA , HAR , HHAX, HHAY 00000150  
+ , HC , HD , HHDX, HHDY, HHDR, HHDM 00000160  
+ , HE , HF , HG , HHGG, HHGL, HHGT 00000170  
+ , HH , HI , HIP , HIL , HIR 00000180  
INTEGER\*4 00000190  
+ HL , HLX , HLY , HM 00000200  
+ , HO , HOD , HOP , HOE , HOT , HOW , HHP 00000210  
+ , HQ , HQN , HHQE, HHQL, HHQA, HHQT 00000220  
+ , HHQM, HHQR, HHQC, HHQQ, HHQV 00000230  
+ , HR , HHRR, HHRK, HHRD 00000240  
INTEGER\*4 00000250  
+ HS , HSC , HSL , HSN , HSX , HSY , HHTC , HHTE 00000260  
+ , HU , HHU , HHUL, HHUM, HHUT 00000270  
+ , HV , HHVV, HHVG, HHVK, HHVT 00000280  
+ , HHVR, HHVI, HHVD, HHVU 00000290  
+ , HXY , HHXC, HHYC, HHZM, HH9C 00000300  
+ , HH9T 00000310  
INTEGER\*4 00000320  
+ H9D , H9DC, H9DG, H9DP, H9DQ, H9FF, H9G 00000330  
+ , H9I , H9IC, H9IG, H9IP, H9IQ, H9TG 00000340  
+ , HHC1, HHC2, HHC3 00000350  
INTEGER\*4 HHCOM,HCMD, H6 , H7 00000360  
INTEGER\*4 JJ , J , JY 00000370  
DIMENSION BBT(8), HHCOM(381), KKCOM(19), RRCOM(79), JJ(30) 00000380  
COMMON /CHAR/ 00000390  
+ HHCMD(30) 00000400  
+ , H , HA , HAR , HHAX (7) , HHAY (7) 00000410  
+ , HC , HD , HHDX (7) , HHDY (7) , HHDR (7) , HHDM (7) 00000420  
+ , HE , HF , HG , HHGG (7) , HHGL (7) , HHGT (7) 00000430  
+ , HH , HI , HIP , HIL , HIR 00000440  
+ , HL , HLX , HLY , HM 00000450  
+ , HO , HOD , HOP , HOE , HOT , HOW , HHP (7) 00000460  
+ , HQ , HQN , HHQE (7) , HHQL (7) , HHQA (7) , HHQT (7) 00000470  
+ , HHQM (7) , HHQR (7) , HHQC (7) , HHQQ (7) , HHQV (7) 00000480  
+ , HR , HHRR (7) , HHRK (7) , HHRD (7) 00000490  
+ , HS , HSC , HSL , HSN , HSX , HSY , HHTC (7) , HHTE (7) 00000500  
+ , HU , HHU (7) , HHUL (7) , HHUM (7) , HHUT (7) 00000510  
+ , HV , HHVV (7) , HHVG (7) , HHVK (7) , HHVT (7) 00000520  
+ , HHVR (7) , HHVI (7) , HHVD (7) , HHVU (7) 00000530  
+ , HXY , HHXC (7) , HHYC (7) , HHZM (7) , HH9C (7) 00000540  
+ , HH9T (7) 00000550  
+ , H9D , H9DC, H9DG, H9DP, H9DQ, H9FF, H9G 00000560  
+ , H9I , H9IC, H9IG, H9IP, H9IQ, H9TG 00000570  
+ , HHC1 (18) , HHC2 (18) , HHC3 (18) 00000580  
COMMON /BIT / 00000590  
+ BERR, BATCH 00000600  
+ , BOP , BOE ,BTSS 00000610  
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8 00000620

```

COMMON /INT /
+ LUL , LUM , LUR , LUP , LUE , LUW
+ MCMD
+ KDX , KDY , KG , KLX , KLY , KR
+ KTE , KVG , KVP , KVR , KXC , KYC
+ NQ , NQN , NSL , NSN , NSX , NSY
+ MQ
+ KKQX( 10) , KKQM( 10)
COMMON /REAL/
+ UA , UD , UGL , UGT , ULC
+ UQL , UQA , UQT , UQM , UQR , UQC , UQQ , UQV
+ URK , URD , UTC , UVV , UVK , UVT , UVI , UVD , UVU , UZM
+ U9C
+ AX , AY , C , CE , DX , DY , DR , DM , DXT , DYT
+ G , GL , GT , G2 , P , QE , QD
+ R , RK , RP , RD , SC , TC , TD , TE , TPHI
+ V , VN , VG , VP , VK , VKN , VT , VTN , VM
+ VR , VI , VD , VU
+ XC , X9C , XGL , XGM , XGI , XD
+ YC , Y9C , YGL , YGM , YGI , YD , ZM
+ QQXL( 10) , QQXM( 10) , QQYL( 10) , QQYM( 10)
+ QQA ( 10) , QQT ( 10) , QQV ( 10) , QQ ( 10)
+ QQC ( 10) , QQR ( 10) , QQM ( 10)
EQUIVALENCE (HHCOM(1), H), (KKCOM(1), KDX), (RRCOM(1), UA)
EQUIVALENCE (BBT(1), BT1)
DATA NACC, NEXP / 20, 80 /
DATA MBT, MHC, MKC, MRC, MJ / 8, 381, 19, 76, 30 /
DATA BIP /.TRUE./

C ===== GLOBAL FORMATS ====== 00000910
1001 FORMAT(1X)
1002 FORMAT('O')
1003 FORMAT('O'/)
1021 FORMAT(18A4)
1023 FORMAT(5E15.0)
1031 FORMAT(1X, 18A4)
1033 FORMAT(1X, 5G15.7)
1081 FORMAT(' INVALID OR MISSING VALUE.')
C ===== BEGIN EXECUTION ====== 00001000
1101 FORMAT(' GROUNDWATER PLUME CALCULATION PROGRAM'
+ '/ D.C. KENT, HYDROGEOLOGIST, PRINCIPAL INVESTIGATOR'
+ '/ FRED WITZ, PROGRAMMER'
+ '/ GEOLOGY DEPARTMENT, OKLAHOMA STATE UNIVERSITY'
+ '/ FORTRAN VERSION 1.1 (1984, JANUARY)' / )
      WRITE(LUP, 1101)
      GO TO 1500
C ===== INPUT LOOP ====== 00001080
1400 CONTINUE
1401 FORMAT(' COMMAND?')
      IF(BOP) WRITE(LUP, 1401)
      READ (LUR, 1021) (HHCMD(I), I = 1, 18)
      IF(BOE) CALL PUTH(HHCMD, LUE)
      HHCMD(19) = H
C ===== NEXT COMMAND LOOP: POP ====== 00001150
1500 CONTINUE
      HCMD = HHCMD(1)
      IF(HCMD.EQ.H) GO TO 1400
      DO 1580 I = 2, MCMD
          HHCMD(I - 1) = HHCMD(I)
          IF(HHCMD(I).EQ.H) GO TO 1590
1580 CONTINUE
      HHCMD(MCMD) = H
1590 CONTINUE
C ===== RE-EXECUTE LOOP: SIEVE ====== 00001250
1700 CONTINUE
      IF(BT2) CALL PUTH(HHCMD, LUE)
      IF(BT1) WRITE(LUE, 1031) HCMD

```

IF(HCMD.EQ. H	) GO TO 1400	00001290
IF(HCMD.EQ. HA	) GO TO 2100	00001300
IF(HCMD.EQ.HHAX (1)	) GO TO 2110	00001310
IF(HCMD.EQ.HHAY (1)	) GO TO 2120	00001320
IF(HCMD.EQ. HAR	) GO TO 2330	00001330
IF(HCMD.EQ. HC	) GO TO 2200	00001340
IF(HCMD.EQ. HD	) GO TO 2300	00001350
IF(HCMD.EQ.HHDX (1)	) GO TO 2310	00001360
IF(HCMD.EQ.HHDY (1)	) GO TO 2320	00001370
IF(HCMD.EQ.HHDR (1)	) GO TO 2330	00001380
IF(HCMD.EQ.HHDM (1)	) GO TO 2340	00001390
IF(HCMD.EQ. HE	) GO TO 2400	00001400
IF(HCMD.EQ. HG	) GO TO 2500	00001410
IF(HCMD.EQ.HHGG (1)	) GO TO 2510	00001420
IF(HCMD.EQ.HHGL (1)	) GO TO 2520	00001430
IF(HCMD.EQ.HHGT (1)	) GO TO 2530	00001440
IF(HCMD.EQ. HH	) GO TO 2600	00001450
IF(HCMD.EQ. HI	) GO TO 2700	00001460
IF(HCMD.EQ. HIP	) GO TO 2710	00001470
IF(HCMD.EQ. HIL	) GO TO 2720	00001480
IF(HCMD.EQ. HIR	) GO TO 2730	00001490
IF(HCMD.EQ. HL	) GO TO 2800	00001500
IF(HCMD.EQ. HLX	) GO TO 2810	00001510
IF(HCMD.EQ. HLY	) GO TO 2820	00001520
IF(HCMD.EQ. HM	) GO TO 4700	00001530
IF(HCMD.EQ. HO	) GO TO 3000	00001540
IF(HCMD.EQ. HOD	) GO TO 3010	00001550
IF(HCMD.EQ. HOW	) GO TO 3020	00001560
IF(HCMD.EQ. HOP	) GO TO 3030	00001570
IF(HCMD.EQ. HOE	) GO TO 3040	00001580
IF(HCMD.EQ. HOT	) GO TO 3050	00001590
IF(HCMD.EQ.HHP (1)	) GO TO 3100	00001600
IF(HCMD.EQ. HQ	) GO TO 3500	00001610
IF(HCMD.EQ.HHOE (1)	) GO TO 3810	00001620
IF(HCMD.EQ. HON	) GO TO 3820	00001630
IF(HCMD.EQ.HHQM (1)	) GO TO 3900	00001640
IF(HCMD.EQ. HR	) GO TO 4100	00001650
IF(HCMD.EQ.HHRR (1)	) GO TO 4100	00001660
IF(HCMD.EQ. HS	) GO TO 4200	00001670
IF(HCMD.EQ. HSC	) GO TO 4210	00001680
IF(HCMD.EQ. HSL	) GO TO 4220	00001690
IF(HCMD.EQ. HSN	) GO TO 4230	00001700
IF(HCMD.EQ. HSX	) GO TO 4240	00001710
IF(HCMD.EQ. HSY	) GO TO 4250	00001720
IF(HCMD.EQ.HHTC (1)	) GO TO 4300	00001730
IF(HCMD.EQ.HHTE (1)	) GO TO 4400	00001740
IF(HCMD.EQ. HV	) GO TO 4500	00001750
IF(HCMD.EQ.HHVV (1)	) GO TO 4500	00001760
IF(HCMD.EQ. HXY	) GO TO 4600	00001770
IF(HCMD.EQ.HHXC (1)	) GO TO 4610	00001780
IF(HCMD.EQ.HHYC (1)	) GO TO 4620	00001790
IF(HCMD.EQ.HHZM (1)	) GO TO 4700	00001800
IF(HCMD.EQ.HH9C (1)	) GO TO 5100	00001810
IF(HCMD.EQ.HH9T (1)	) GO TO 5600	00001820
IF(HCMD.EQ. H9D	) GO TO 5200	00001830
IF(HCMD.EQ. H9DC	) GO TO 5210	00001840
IF(HCMD.EQ. H9DG	) GO TO 5220	00001850
IF(HCMD.EQ. H9DP	) GO TO 5250	00001860
IF(HCMD.EQ. H9DQ	) GO TO 5260	00001870
IF(HCMD.EQ. H9FF	) GO TO 5300	00001880
IF(HCMD.EQ. H9G	) GO TO 5400	00001890
IF(HCMD.EQ. H9I	) GO TO 5500	00001900
IF(HCMD.EQ. H9IC	) GO TO 5510	00001910
IF(HCMD.EQ. H9IG	) GO TO 5520	00001920
IF(HCMD.EQ. H9IP	) GO TO 5250	00001930
IF(HCMD.EQ. H9IQ	) GO TO 5560	00001940

```

        IF(HCMD.EQ. H9TG      ) GO TO 5620          00001950
        WRITE(LUP, 1801) HCMD                      00001960
1801 FORMAT(1X, A4, '?')
        GO TO 1400
C      ====== COMMAND EXITS ====== 00001990
C      ====== INPUT AND MISC. ====== 00002000
C      ----- A ----- 00002010
2100 CONTINUE                                00002020
2101 FORMAT(' 1 FOR X AND Y DISPERSIVITY (AX, AY),'
+           '/ 2 FOR X DISPERSIVITY AND DISPERSION RATIO (AX, DR):'
+           '/ ?')                                 00002030
        IF(BOP) WRITE(LUP, 2101)
        CALL GETI(ICMD, 1, 2)
        IF(BERR) GO TO 8110
        IF(ICMD.EQ.1) CALL PUSH(HHAY(1) )
        IF(ICMD.EQ.2) CALL PUSH(HHDR(1) )
C      GO TO 2110
C      ----- AX ----- 00002110
2110 CALL GETR(HHAX, AX, .TRUE.)
        IF(BERR) GO TO 8120
        KDX = 2
        GO TO 1500
C      ----- AY ----- 00002170
2120 CALL GETR(HHAY, AY, .TRUE.)
        IF(BERR) GO TO 8120
        KDY = 2
        GO TO 1500
C      ----- C ----- 00002220
2200 CONTINUE                                00002230
2201 FORMAT(' THREE TITLE LINES: / / ?')       00002240
2202 FORMAT(' ?')
        IF(BOP) WRITE(LUP, 2201)
        READ (LUR, 1021) HHC1
        IF(BOE) CALL PUTH(HHC1, LUE)
        IF(BOP) WRITE(LUP, 2202)
        READ (LUR, 1021) HHC2
        IF(BOE) CALL PUTH(HHC2, LUE)
        IF(BOP) WRITE(LUP, 2202)
        READ (LUR, 1021) HHC3
        IF(BOE) CALL PUTH(HHC3, LUE)
        GO TO 1500
C      ----- D = D OR A ----- 00002360
2300 CONTINUE                                00002370
2301 FORMAT(' 1 FOR X AND Y DISPERSION (DX, DY),'
+           '/ 2 FOR X DISPERSION AND DISPERSION RATIO (DX, DR),'
+           '/ 3 FOR X AND Y DISPERSIVITY (AX, AY),'
+           '/ 4 FOR X DISPERSIVITY AND DISPERSION RATIO (AX, DR),'
+           '/ (USE DM FOR MOLECULAR DIFFUSION):'
+           '/ ?')                                 00002390
        IF(BOP) WRITE(LUP, 2301)
        CALL GETI(ICMD, 1, 4)
        IF(BERR) GO TO 8110
        IF(ICMD.EQ.1) CALL PUSH(HHDY(1) )
        IF(ICMD.EQ.2) CALL PUSH(HHDR(1) )
        IF(ICMD.EQ.3) CALL PUSH(HHAY(1) )
        IF(ICMD.EQ.4) CALL PUSH(HHDR(1) )
        GO TO (2310, 2310, 2110, 2110), ICMD
C      ----- DX ----- 00002520
2310 CALL GETR(HHDX, DX, .TRUE.)
        IF(BERR) GO TO 8120
        KDX = 1
        GO TO 1500
C      ----- DY ----- 00002570
2320 CALL GETR(HHDY, DY, .TRUE.)
        IF(BERR) GO TO 8120
        KDY = 1
        GO TO 1500

```

```

GO TO 1500                               00002610
C                                         DR -----
2330 CALL GETR(HHDR, DR, .TRUE.)          00002620
IF(BERR) GO TO 8120                      00002630
KDY = 3                                    00002640
GO TO 1500                                00002650
C                                         DM -----
2340 CALL GETR(HHDM, DM, .TRUE.)          00002660
IF(BERR) GO TO 8120                      00002670
GO TO 1500                                00002680
C                                         E -----
2400 CONTINUE                             00002690
2401 FORMAT(' END OF PLUME PROGRAM.')    00002700
2402 FORMAT(' GOODBYE.')
WRITE(LUE, 2401)                          00002710
WRITE(LUP, 2402)
STOP                                     00002720
C                                         G -----
2500 CONTINUE                             00002730
2501 FORMAT(' O FOR NO DECAY,
+      /' 1 FOR DECAY COEFFICIENT, GAMMA (GG),
+      /' 2 FOR DECAY LAMBDA (GL),
+      /' 3 FOR DECAY HALF-LIFE (GT):
+      /' ?')
IF(BOP) WRITE(LUP, 2501)
CALL GETI(ICMD, O, 3)
IF(BERR) GO TO 8110
ICMD = ICMD + 1
GO TO (2505, 2510, 2520, 2530), ICMD
2505 G = 1.0                               00002740
KG = 1                                    00002750
GO TO 1500                                00002760
C                                         GG -----
2510 CALL GETR(HHGG, XC, .FALSE.)          00002770
IF(XC.LT.1.0) GO TO 8120
G = XC                                     00002780
KG = 1                                    00002790
GO TO 1500                                00002800
C                                         GL -----
2520 CALL GETR(HHGL, XC, .FALSE.)          00002810
IF(XC.LT.0.0) GO TO 8120
GL = XC                                     00002820
KG = 2                                    00002830
GO TO 1500                                00002840
C                                         GT -----
2530 CALL GETR(HHGT, GT, .TRUE.)           00002850
IF(BERR) GO TO 8120
GL = 1.0                                   00002860
KG = 3                                    00002870
GO TO 1500                                00002880
C                                         H -----
2600 CONTINUE                             00002890
2601 FORMAT(
+  ' INPUT:             OUTPUT:'
+  /' C CASE TITLE   .I INPUT PARAM.'
+  /' M THICKNESS    .D ALL PARAM.'
+  /' P POROSITY     .C SINGLE'
+  /' V VELOCITY      .G GRID MAP'
+  /' D DISPERSION   .FF PAGE PRINT'
+  /' A DISPERSIVITY'
+  /' R RETARDATION   SPECIAL:'
+  /' G DECAY         H HELP'
+  /' Q SOURCE        E EXIT'
+  /' T SAMPLE TIME   I INPUT'
+  /' TE STEADY STATE O OUTPUT'
+  /' XY SINGLE X,Y'

```

```

+/ ' L GRID LIMITS'          00003270
+/ ' S GRID SCALES'         00003280
      WRITE(LUP, 2601)         00003290
      GO TO 1500              00003300
C ----- I -----
2700  CONTINUE                00003310
2701 FORMAT( / ' 1 TO PROMPT FOR ALL REQUIRED PARAMETERS (IP),'
+   / ' 2 TO LOAD PREVIOUSLY SAVED PARAMETERS (IL),'
+   / ' 3 TO READ ALL INPUT FROM ANOTHER SOURCE (IR),'
+   / ' -1 TO SET OUTPUT PARAMETERS (O):'
+   / ' ?')
      IF(BOP) WRITE(LUP, 2701)
      CALL GETI(ICMD, -1, 3)
      IF(BERR) GO TO 8110
      IF(ICMD.EQ. 0) GO TO 8110
      IF(ICMD.EQ. 1) GO TO 2710
      IF(ICMD.EQ. 2) GO TO 2720
      IF(ICMD.EQ. 3) HCMD = HIR
      IF(ICMD.EQ.-1) HCMD = HO
      CALL PUSH(HI)
      GO TO 1700
C ----- IP -----
C (LAST COMMAND MUST RESET BIP)
2710  BIP = .TRUE.            00003480
      KLX = O                 00003490
      KLY = O                 00003500
      KXC = O                 00003510
      KYC = O                 00003520
      NQ  = O                 00003530
      CALL PUSH(HD)            00003540
      CALL PUSH(HG)            00003550
      CALL PUSH(HR)            00003560
      CALL PUSH(HHTC(1) )
      CALL PUSH(HQ)            00003570
      CALL PUSH(HL)            00003580
      CALL PUSH(HV)            00003590
      CALL PUSH(HHP (1) )
      CALL PUSH(HHZM(1) )
      HCMD = HC                00003600
      GO TO 1700
C ----- IL -----
2720  CONTINUE                00003610
2721 FORMAT(' LOAD FILE UNIT (', I3, ' TO', I3, ','):/ ' ?')
      WRITE(LUP, 2721) LUL, LUM        00003620
      CALL GETI(LU, LUL, LUM)         00003630
      IF(BERR) GO TO 8120
      READ (LU) I, IX, IY, IQ
      IF(   I .NE. MHCOM
+     .OR. IX.NE.MKCOM
+     .OR. IY.NE.MRCOM
+     .OR. IQ.NE.MQ
+   ) GO TO 8120
      READ (LU) HHCOM
      READ (LU) KKCOM, KKQX, KKQM
      READ (LU) RRCOM
      READ (LU) QQXL, QQXM, QQYL, QQYM
+     . QQA , QQT , QOV , QQ
+     , QQC , QQR , QQM
      ENDFILE LU
      BIP = .FALSE.
      GO TO 1500
C ----- IR -----
2730  CONTINUE                00003880
2731 FORMAT(' INPUT UNIT (1 TO', I3, ','):/ ' ?')
      IF(BOP) WRITE(LUP, 2731) LUM        00003890
      CALL GETI(LU, 1, LUM)           00003900
                                         00003910
                                         00003920

```

```

IF(BERR) GO TO 8120          00003930
LUR = LU                     00003940
GO TO 1500                   00003950
C ----- L ----- 00003960
2800 CALL PUSH(HLY )         00003970
C GO TO 2810                 00003980
C ----- LX ----- 00003990
2810 CONTINUE                 00004000
2811 FORMAT(' GRID MAP X LOCATIONS (',2A4,',' 00004010
+   /' MINIMUM, (MAXIMUM), (INTERVAL):' 00004020
+   /' ?')                                00004030
IF(BOP) WRITE(LUP, 2811) HHXC(6), HHXC(7) 00004040
READ (LUR, 1023) XGL, XGM, XGI           00004050
IF(BOE) WRITE(LUE, 1033) XGL, XGM, XGI   00004060
KLX = 0                                 00004070
IF(XGM.LE.XGL .AND. XGI.LE.0.0) GO TO 8120 00004080
KLX = 1                                 00004090
GO TO 1500                  00004100
C ----- LY ----- 00004110
2820 CONTINUE                 00004120
2821 FORMAT(' GRID MAP Y LOCATIONS (',2A4,',' 00004130
+   /' MINIMUM, MAXIMUM, (INTERVAL):' 00004140
+   /' ?')                                00004150
IF(BOP) WRITE(LUP, 2821) HHYC(6), HHYC(7) 00004160
READ (LUR, 1023) YGL, YGM, YGI           00004170
IF(BOE) WRITE(LUE, 1033) YGL, YGM, YGI   00004180
KLY = 1                                 00004190
GO TO 1500                  00004200
C ----- O ----- 00004210
3000 CONTINUE                 00004220
3001 FORMAT(' 1 TO DUMP ALL PARAMETERS TO DISK (OD),' 00004230
+   /' 2 TO SET LOCATION FOR WRITING RESULTS (OW),' 00004240
+   /' 3 TO SET PROMPTING (OP),' 00004250
+   /' 4 TO SET ECHO (OE),' 00004260
+   /' 5 TO SET TRACE (OT),' 00004270
+   /' ?')                                00004280
IF(BOP) WRITE(LUP, 3001)
CALL GETI(ICMD, 1, 5)
IF(BERR) GO TO 8110
GO TO (3010, 3020, 3030, 3040, 3050), ICMD
C ----- OD ----- 00004330
3010 CONTINUE                 00004340
IF(BIP) GO TO 8110             00004350
3011 FORMAT(' DUMP FILE UNIT (', I3, ' TO', I3, '):// ' ?') 00004360
WRITE(LUP, 3011) LUL, LUM           00004370
CALL GETI(LU, LUL, LUM)            00004380
IF(BERR) GO TO 8120             00004390
WRITE(LU) MHCOM, MKCOM, MRCOM, MQ  00004400
WRITE(LU) HHCOM                  00004410
WRITE(LU) KKCOM, KKQX, KKQM       00004420
WRITE(LU) RRCOM                  00004430
WRITE(LU) QQXL, QQXM, QQYL, QQYM 00004440
+     , QQA , QQT , QOV , QQ      00004450
+     , QQC , QQR , QQM          00004460
ENDFILE LU                      00004470
GO TO 1500                     00004480
C ----- OW ----- 00004490
3020 CONTINUE                 00004500
3021 FORMAT(' 1 TO' I3, ' TO SET RESULTS UNIT:// ' ?') 00004510
IF(BOP) WRITE(LUP, 3021) LUM           00004520
CALL GETI(LU, 1, LUM)              00004530
IF(BERR) GO TO 8120             00004540
LUW = LU                         00004550
GO TO 1500                     00004560
C ----- OP ----- 00004570
3030 CONTINUE                 00004580

```



```

READ (LUR, 1023) QXL, QYL          00005250
IF(BOE) WRITE(LUE, 1033) QXL, QYL  00005260
CALL GETR(HHQA, QA, .FALSE.)
C   IF(QA.LT.0.) GO TO 3790        00005270
KQX = 1                            00005280
QXM = QXL                          00005290
QYM = QYL                          00005300
GO TO 3600                         00005310
C   ----- NON-POINT -----       00005320
3540  IF(NQ.GE.MQ) GO TO 3799      00005330
3541  FORMAT(' X LOCATION MINIMUM, MAXIMUM (', 2A4, ','):' / ' ?')
    IF(BOP) WRITE(LUP, 3541) HHQL(6), HHQL(7) 00005340
    READ (LUR, 1023) QXL, QXM            00005350
    IF(BOE) WRITE(LUE, 1033) QXL, QXM            00005360
    IF(QXM.LE.QXL) GO TO 3790           00005370
3542  FORMAT(' Y LOCATION MINIMUM, MAXIMUM (', 2A4, ','):' / ' ?')
    IF(BOP) WRITE(LUP, 3542) HHQL(6), HHQL(7) 00005380
    READ (LUR, 1023) QYL, QYM            00005390
    IF(BOE) WRITE(LUE, 1033) QYM, QYM            00005400
    IF(QYM.LE.QYL) GO TO 3790           00005410
    KQX = 2                            00005420
    QA = (QXM - QXL)*(QYM - QYL)*UQL*UQL/UQA 00005430
C   ----- TIME AND RATE -----     00005440
3600  CONTINUE                      00005450
3601  FORMAT(' 1 FOR MASS FLOW RATE (' , 2A4, ',')
+    /' 2 FOR MASS/AREA RATE (' , 2A4, ','
+    /' 3 FOR VOLUME FLOW RATE (' , 2A4, ','
+    /' AND CONCENTRATION (' , 2A4, ','
+    /' 4 FOR VOLUME/AREA RATE (' , 2A4, ','
+    /' AND CONCENTRATION (' , 2A4, ','
+    /' ?')
    IF(BOP) WRITE(LUP, 3601)
+    HHQM(6), HHQM(7), HHQR(6), HHQR(7) 00005460
+    , HHQQ(6), HHQQ(7), HHQC(6), HHQC(7) 00005470
+    , HHQV(6), HHQV(7), HHQC(6), HHQC(7)
    CALL GETI(KQM, 1, 4)                 00005480
    IF(BERR) GO TO 3790                00005490
    QTO = -1E20                         00005500
    QAU = QA*UQA                        00005510
    QV = 0.0                           00005520
    Q = 0.0                           00005530
    QC = 0.0                           00005540
    QR = 0.0                           00005550
3700  CONTINUE                      00005560
    GO TO (3710, 3720, 3730, 3740), KQM 00005570
3710  CONTINUE                      00005580
3711  FORMAT(' TIME, MASS FLOW RATE, (CONCENTRATION):' / ' ?')
    IF(BOP) WRITE(LUP, 3711)
    READ (LUR, 1023) QT, QM, QC          00005590
    IF(BOE) WRITE(LUE, 1033) QT, QM, QC  00005600
    Q = 0.
    IF(QC.GT.0.0) Q = QM*UQM/(QC*UQC)  00005610
    IF(QA.LE.0.0) GO TO 3715           00005620
    QR = QM*UQM/(QAU *UQR)             00005630
    QV = Q / (QAU *UQV)               00005640
3715  Q = Q / UQQ                  00005650
    GO TO 3760                         00005660
3720  CONTINUE                      00005670
    IF(QA.LE.0.0) GO TO 3790           00005680
3721  FORMAT(' TIME, MASS/AREA RATE, (CONCENTRATION):' / ' ?')
    IF(BOP) WRITE(LUP, 3721)
    READ (LUR, 1023) QT, QR, QC          00005690
    IF(BOE) WRITE(LUE, 1033) QT, QR, QC  00005700
    QM = QR*UQR*QAU                   00005710
    IF(QC.LE.0.0) GO TO 3725           00005720
    Q = QM / (QC*UQC*UQQ)              00005730

```

```

        QV = Q *UQQ/(QAU    *UQV)          00005910
        GO TO 3750                         00005920
3725   Q = O.                           00005930
        QV = O.                           00005940
        GO TO 3750                         00005950
3730   CONTINUE
3731 FORMAT(' TIME, VOLUME FLOW RATE, CONCENTRATION:' / ' ?')
        IF(BOP) WRITE(LUP, 3731)           00005970
        READ (LUR, 1023) QT, Q, QC         00005980
        IF(BOE) WRITE(LUE, 1033) QT, Q, QC  00006000
        QM = Q *UQQ*QC*UQC               00006010
        IF(QA.LE.O.O) GO TO 3750          00006020
        QR = QM   /(QAU    *UQR)           00006030
        QV = Q *UQQ/(QAU    *UQV)           00006040
        GO TO 3750                         00006050
3740   CONTINUE
        IF(QA.LE.O.O) GO TO 3790          00006060
3741 FORMAT(' TIME, VOLUME/AREA RATE, CONCENTRATION:' / ' ?')
        IF(BOP) WRITE(LUP, 3741)           00006080
        READ (LUR, 1023) QT, QV, QC       00006090
        IF(BOE) WRITE(LUE, 1033) QT, QV, QC 00006110
        Q = QV*UQV*QAU   /UQQ             00006120
        QR = QV*UQV*QC*UQC               00006130
        QM = QR   *QAU                 00006140
        QR = QR/UQR                  00006150
3750   CONTINUE
        QM = QM/UQM                  00006160
3760   CONTINUE
        IF(QT.LE.QTO) GO TO 3510          00006170
        IF(QM.LT.O.) GO TO 3790          00006180
C      IF(QC.LT.O.) GO TO 3790          00006190
        IF(NQ.GE.MQ) GO TO 3790          00006200
        NQ = NQ + 1                     00006210
        KKQX(NQ) = KQX                 00006220
        KKQM(NQ) = KQM                 00006230
        QQXL(NQ) = QXL                 00006240
        QQXM(NQ) = QXM                 00006250
        QQYL(NQ) = QYL                 00006260
        QQYM(NQ) = QYM                 00006270
        QQT (NQ) = QT                  00006280
        QQA (NQ) = QA                  00006290
        QOV (NQ) = QV                  00006300
        QQ (NQ) = Q                   00006310
        QQC (NQ) = QC                  00006320
        QQR (NQ) = QR                  00006330
        QQM (NQ) = QM                  00006340
        QTO = QT                      00006350
        KQX = ISIGN(KQX, -1)            00006360
        ICMD = MIN1(QTO, O.O)           00006370
3771 FORMAT(1X,'ENTER', I5, ' TO RETURN TO MAIN SOURCE MENU: ')
        IF(BOP) WRITE(LUP, 3771) ICMD     00006380
        GO TO 3700                         00006390
C      ----- ERRORS -----          00006400
3790   WRITE(LUP, 1081)                 00006410
3799   IF(BATCH) GO TO 1400             00006420
        GO TO 3510                         00006430
C      ===== QE =====          00006440
3810   CALL GETR(HHQE, QE, .TRUE.)      00006450
        IF(BERR) GO TO 8120               00006460
        GO TO 1500                         00006470
C      ----- QN -----          00006480
3820   CONTINUE
3821 FORMAT(' MAXIMUM NUMBER OF SUBAREAS PER SOURCE:'
+   / ' ?')
        IF(BOP) WRITE(LUP, 3821)           00006490
        CALL GETI(ICMD, O, O)              00006500
C      ----- QN -----          00006510
3822 FORMAT(' MAXIMUM NUMBER OF SUBAREAS PER SOURCE:'
+   / ' ?')
        IF(BOP) WRITE(LUP, 3822)           00006520
        CALL GETI(ICMD, O, O)              00006530
C      ----- QN -----          00006540
3823 FORMAT(' MAXIMUM NUMBER OF SUBAREAS PER SOURCE:'
+   / ' ?')
        IF(BOP) WRITE(LUP, 3823)           00006550
        CALL GETI(ICMD, O, O)              00006560

```

```

IF(ICMD.LE.0) GO TO 8120          00006570
NQN = ICMD                         00006580
GO TO 1500                          00006590
C ===== QM ====== 00006600
3900 CONTINUE                        00006610
C3901 FORMAT(
C   + '      X           Y           START       MASS
C   +/' LINE  LOCATION  LOCATION     TIME       FLOW RATE'
C   +/ 6X. 4( (' , 2A4, ') ')
C3902 FORMAT(1X, I4, 1X, 4G13.6)    00006660
C   LU = LUW                         00006670
C   IF(.NOT. BOP) GO TO 3920        00006680
C   LU = LUP                         00006690
C3910 WRITE(LU, 3901) HHQL(6), HHQL(7), HHQL(6), HHQL(7) 00006700
C   + , HHQT(6), HHQT(7), HHQM(6), HHQM(7) 00006710
C   DO 3919 IQ = 1, NQ               00006720
C   WRITE(LU, 3902) IQ, QQXL(IQ), QQYL(IQ), QQT(IQ), QQM(IQ) 00006730
C3919 CONTINUE                        00006740
3920 CONTINUE                        00006750
3921 FORMAT(' -1 TO LIST FLOW RATES,' 00006760
+   /' O TO END QM,'                00006770
+   /' TIME STEP (LINE) NUMBER TO CHANGE FLOW RATE:' 00006780
+   /' ?')
IF(BOP) WRITE(LUP, 3921)             00006800
CALL GETI(ICMD, -1, NQ)              00006810
IF(BERR) GO TO 3990                 00006820
C IF(ICMD) 3910, 1500, 3950        00006830
IF(ICMD) 3930, 1500, 3950        00006840
3930 CALL PUSH(HCMD)                00006850
HCMD = H9IQ                         00006860
GO TO 1700                          00006870
3950 CALL GETR(HHQM, QM, .FALSE.)    00006880
IF(QM.LT.0.) GO TO 3990              00006890
KKQM(ICMD) = 1                      00006900
QQM (ICMD) = QM                     00006910
QQR (ICMD) = O.                     00006920
QQ (ICMD) = O.                      00006930
QQV (ICMD) = O.                     00006940
GO TO 3920                          00006950
C ----- ERRORS ----- 00006960
3990 WRITE(LUP, 1081)                00006970
IF(BATCH) GO TO 1400                 00006980
GO TO 3920                          00006990
C ===== R ====== 00007000
4100 CALL GETR(HHRR, XC, .FALSE.)    00007010
IF(XC.LT.1.0) GO TO 8120            00007020
R = XC                             00007030
GO TO 1500                          00007040
C ===== R ====== 00007050
4200 CONTINUE                        00007060
4201 FORMAT(' GRID MAP SCALE PARAMETERS:'
+   /' 1 TO SET CONCENTRATION/STEADY STATE SCALE (SC),' 00007080
+   /' 2 TO SET LINE SIZE (SL),' 00007090
+   /' 3 TO SET NODES PER LINE (SN),' 00007100
+   /' 4 TO SET X SPACING (SX),' 00007110
+   /' 5 TO SET Y SPACING (SY):' 00007120
+   /' ?')
IF(BOP) WRITE(LUP, 4201)             00007140
CALL GETI(ICMD, 1, 5)                00007150
IF(BERR) GO TO 8110                 00007160
GO TO (4210, 4220, 4230, 4240, 4250), ICMD 00007170
C ----- SC ----- 00007180
4210 CONTINUE                        00007190
4211 FORMAT(' GRID MAP MULTIPLIER:/' ?')
IF(BOP) WRITE(LUP, 4211)             00007210
READ (LUR, 1023) XC                  00007220

```

```

IF(BOE) WRITE(LUE, 1033) XC          00007230
IF(XC.LE.O.O) GO TO 8120            00007240
SC = 1.0/XC                         00007250
GO TO 1500                           00007260
C ----- SL -----
4220 CONTINUE                         00007270
4221 FORMAT(' GRID MAP LINE SIZE (40-255 CHARACTERS/LINE):'/' ?') 00007290
    IF(BOP) WRITE(LUP, 4221)           00007300
    CALL GETI(ICMD, 40, 255)          00007310
    IF(BERR) GO TO 8120              00007320
    NSL = ICMD                        00007330
    GO TO 1500                         00007340
C ----- SN -----
4230 CONTINUE                         00007350
4231 FORMAT(' GRID MAP NODES PER LINE (0 FOR FULL LINE):'/' ?') 00007370
    IF(BOP) WRITE(LUP, 4231)           00007380
    CALL GETI(NSN, 0, 0)              00007390
    GO TO 1500                         00007400
C ----- SX -----
4240 CONTINUE                         00007410
4241 FORMAT(' GRID MAP X SPACING (3 TO 6 CHARACTERS/NODE):'/' ?') 00007430
    IF(BOP) WRITE(LUP, 4241)           00007440
    CALL GETI(ICMD, 3, 6)             00007450
    IF(BERR) GO TO 8120              00007460
    NSX = ICMD                        00007470
    GO TO 1500                         00007480
C ----- SY -----
4250 CONTINUE                         00007490
4251 FORMAT(' GRID MAP Y SPACING (1 TO 4 LINES/NODE):'/' ?') 00007510
    IF(BOP) WRITE(LUP, 4251)           00007520
    CALL GETI(ICMD, 1, 4)              00007530
    IF(BERR) GO TO 8120              00007540
    NSY = ICMD                        00007550
    GO TO 1500                         00007560
C ----- T -----
4300 CONTINUE                         00007570
4301 FORMAT(' -1 FOR STEADY STATE.')
    IF(BOP) WRITE(LUP, 4301)           00007580
    CALL GETR(HHTC, TC, .FALSE.)
    BIP = .FALSE.                      00007590
    GO TO 1500                         00007600
    CALL GETR(HHTE, XC, .TRUE.)        00007610
    IF(BERR) GO TO 8120              00007620
    IF(XC .GT. 100.) GO TO 8120       00007630
    KTE = 1                            00007640
    YC = XC/50.                        00007650
    PO = 0.                            00007660
    P2 = PO                            00007670
    KTE = 1                            00007680
    IF(ERFC(PO) - YC) 4425, 4480, 4426 00007690
4425 PO = -1.                          00007700
    GO TO 4429                         00007710
4426 PO = 1.                           00007720
4429 CONTINUE                         00007730
    DO 4448 I = 1, NEXP               00007740
        IF((ERFC(PO) - YC)*PO) 4449, 4480, 4445 00007750
4445 P2 = PO                           00007760
    PO = PO * 2.                      00007770
4448 CONTINUE                         00007780
    GO TO 8120                         00007790
4449 P1 = AMIN1(PO,P2)                00007800
    P2 = AMAX1(PO,P2)                00007810
    DO 4468 I = 1, NACC               00007820
        PO = (P1 + P2)/2.0             00007830
        IF(ERFC(PO) - YC) 4465, 4480, 4466 00007840
4465 P2 = PO                           00007850
                                            00007860
                                            00007870
                                            00007880

```

```

        GO TO 4467          00007890
4466      P1 = PO          00007900
4467      CONTINUE         00007910
4468      CONTINUE         00007920
        PO = (P1 + P2)/2.0  00007930
4480      CONTINUE         00007940
        TE = XC           00007950
        TPHI = PO          00007960
        GO TO 1500          00007970
C      ===== V ====== 00007980
4500      CALL GETR(HHVV, V, .TRUE.) 00007990
        IF(BERR) GO TO 8120 00008000
        GO TO 1500          00008010
C      ----- XY ----- 00008020
4600      CALL PUSH(HHYC(1)) 00008030
        HCMD = HHYC(1)    00008040
        GO TO 1700          00008050
C      ----- X ----- 00008060
4610      CONTINUE          00008070
        CALL GETR(HHXC, X9C, .FALSE.) 00008080
        KXC = 1             00008090
        GO TO 1500          00008100
C      ----- Y ----- 00008110
4620      CONTINUE          00008120
        CALL GETR(HHYC, Y9C, .FALSE.) 00008130
        KYC = 1             00008140
        GO TO 1500          00008150
C      ----- ZM ----- 00008160
4700      CALL GETR(HHZM, ZM, .TRUE.) 00008170
        IF(BERR) GO TO 8120 00008180
        GO TO 1500          00008190
C      ===== OUTPUT COMMANDS ====== 00008200
5001 FORMAT(' SAMPLE TIME      = STEADY STATE') 00008210
C      ----- .C ----- 00008220
5100      CONTINUE          00008230
5101 FORMAT(18X, ' +-', G9.3, 1X, 2A4) 00008240
5102 FORMAT(' SAMPLE LOCATION WITHIN SOURCE.')
        IF(KXC.NE.0 .AND. KYC.NE.0) GO TO 5110 00008250
        IF(BATCH) GO TO 8120 00008260
        CALL PUSH(HH9C(1)) 00008270
        IF(KYC.EQ.0) CALL PUSH(HHYC(1)) 00008280
        IF(KXC.EQ.0) CALL PUSH(HHXC(1)) 00008290
        GO TO 1500          00008300
5110      CONTINUE          00008310
        CALL SETUP          00008320
        XC = X9C           00008330
        YC = Y9C           00008340
        B = TC.GE.0.0       00008350
        IF(B) CALL PUTR(HHTC, TC) 00008360
        IF(.NOT.B) WRITE(LUW, 5001) 00008370
        CALL PUTR(HHXC, XC) 00008380
        CALL PUTR(HHYC, YC) 00008390
        CALL CALC            00008400
        IF(.NOT.BERR) CALL PUTR(HH9C, C ) 00008410
        IF(CE.GT.0.0) WRITE(LUW, 5101) CE , HH9C(6), HH9C(7) 00008420
        IF(BERR     ) WRITE(LUW, 5102) 00008430
        WRITE(LUW, 1001) 00008440
        GO TO 1500          00008450
C      ----- .D ----- 00008460
5200      CALL PUSH(H9DQ) 00008470
        HCMD = H9DP          00008480
        GO TO 1700          00008490
C      ----- .DC ----- 00008500
5210      CALL PUSH(HH9C(1)) 00008510
        HCMD = H9D           00008520
        GO TO 1700          00008530
C      ----- .DC ----- 00008540

```

```

C ----- .DG -----
5220 CALL PUSH(H9G) 00008550
HCMD = H9D 00008560
GO TO 1700 00008570
00008580
C ----- .DP, .IP -----
5250 CONTINUE 00008590
5251 FORMAT(' MAXIMUM DIVISION=', I9) 00008600
B = HCMD.EQ.H9DP 00008610
IF(B) CALL SETUP 00008620
CALL PUTH(HHC1, LUW) 00008630
CALL PUTH(HHC2, LUW) 00008640
CALL PUTH(HHC3, LUW) 00008650
WRITE(LUW, 1001) 00008660
CALL PUTR(HHZM, ZM) 00008670
CALL PUTR(HHP, P ) 00008680
CALL PUTR(HHVV, V ) 00008690
WRITE(LUW, 1001) 00008700
00008710
IF(B .OR. KDX.EQ.1 ) CALL PUTR(HHDX, DX) 00008720
IF(B .OR. KDY.EQ.1 ) CALL PUTR(HHDY, DY) 00008730
IF(B .OR. KDX.EQ.2 ) CALL PUTR(HHAX, AX) 00008740
IF(B .OR. KDY.EQ.2 ) CALL PUTR(HHAY, AY) 00008750
IF(B .OR. KDY.EQ.3 ) CALL PUTR(HHDR, DR) 00008760
IF(B .OR. DM.GT.O.O) CALL PUTR(HHDM, DM) 00008770
WRITE(LUW, 1001) 00008780
CALL PUTR(HHRR, R ) 00008790
IF(B .OR. KG .EQ.1 ) CALL PUTR(HHGG, G ) 00008800
IF(B .OR. KG .EQ.2 ) CALL PUTR(HHGL, GL) 00008810
IF( (B .OR. KG .EQ.3) .AND. GL.GT.O.O) CALL PUTR(HHGT, GT) 00008820
WRITE(LUW, 1001) 00008830
IF(B) CALL PUTR(HHQE, QE) 00008840
IF(B) WRITE(LUW, 5251) NQN 00008850
GO TO 1500 00008860
C ----- .DQ -----
5260 CONTINUE 00008870
5261 FORMAT(
+ /' X, Y LOCATION  =', G13.6, ' , ', G13.6, 1X, 2A4) 00008880
00008890
5262 FORMAT(
+ /' X LOCATION      =', G13.6, ' TO ', G13.6, 1X, 2A4 00008890
+ /' Y LOCATION      =', G13.6, ' TO ', G13.6, 1X, 2A4 ) 00008910
00008920
5265 FORMAT(
+ ' START          VOLUME/   VOLUME   '
+,' SOURCE         MASS/AREA  MASS FLOW  '
+/ ' TIME          AREA RATE   FLOW RATE  '
+,' CONCENTR.     RATE       RATE      '
+/1X, 6(' (', 2A4, ') ') ) 00008930
00008940
00008950
00008960
00008970
00008980
00008990
5266 FORMAT(1X, 6G13.6) 00009000
DO 5289 IQ = 1, NQ 00009010
IF(KKQX(IQ)-1) 5280, 5271, 5272 00009020
5271 WRITE(LUW, 5261) QQXL(IQ), QQYL(IQ), HHQL(6), HHQL(7) 00009030
GO TO 5275 00009040
5272 WRITE(LUW, 5262) QQXL(IQ), QQXM(IQ), HHQL(6), HHQL(7) 00009050
+ , QQYL(IQ), QQYM(IQ), HHQL(6), HHQL(7) 00009060
5275 CALL PUTR(HHQA, QQA(IQ) ) 00009070
WRITE(LUW, 5265) 00009080
+ HHQT(6), HHQT(7), HHQV(6), HHQV(7), HHQQ(6), HHQQ(7) 00009090
+ , HHQC(6), HHQC(7), HHQR(6), HHQR(7), HHQM(6), HHQM(7) 00009100
5280 CONTINUE 00009110
WRITE(LUW, 5266) QQT (IQ), QQV (IQ), QQ (IQ) 00009120
+ , QQC (IQ), QQR (IQ), QQM (IQ) 00009130
5289 CONTINUE 00009140
WRITE(LUW, 1001) 00009150
GO TO 1500 00009160
C ----- .FF -----
5300 CONTINUE 00009170
5301 FORMAT('1') 00009180
WRITE(LUW, 5301) 00009190
00009200

```

```

GO TO 1500                                00009210
=====
C 5400 CONTINUE                               00009220
IF(KLX.NE.0 .AND. KLY.NE.0) GO TO 5410      00009230
IF(BATCH) GO TO 8120                         00009240
CALL PUSH(H9G)                             00009250
IF(KLY.EQ.0) CALL PUSH(HLY)                  00009260
IF(KLX.EQ.0) CALL PUSH(HLX)                  00009270
GO TO 1500                                 00009280
5410 CONTINUE                               00009290
CALL SETUP                                00009300
C
NXL = MINO( (NSL - 5)/NSX, MJ)             00009310
NX = NSN                                    00009320
IF(NX.LE.0) NX = NXL                        00009330
XI = XGI                                    00009340
IF(XGM.LE.XGL) GO TO 5425                  00009350
IF(XI.GT.0.) XI = (XGM - XGL)/XI + 1.0    00009360
IF(XI.LE.0.) XI = (XGM - XGL)/(NX - 1)     00009370
5425 CONTINUE                               00009380
K = ALOG10(AMAX1(ABS(XGL), ABS(XGL + XI*FLOAT(NX)) )) 00009390
I = 0                                       00009400
IF(K.GT.NSX-2) I = K - (NSX - 2)           00009410
IF(K.LT.1) I = K - 3                      00009420
XS = 10.0**I                                00009430
C
YI = YGI                                    00009440
IF(YI.LE.0.0) YI = XI                      00009450
NY = MAX1( (YGM - YGL)/YI, 0.0) + 1        00009460
K = ALOG10(AMAX1(ABS(YGL), ABS(YGL + YI*FLOAT(NY)) )) 00009470
I = 0                                       00009480
IF(K.GT.3) I = K - 3                      00009490
IF(K.LT.1) I = K - 3                      00009500
YS = 10.0**I                                00009510
C
CM = 10.0**(NSX - 1)                       00009520
XL = XGL                                    00009530
5440 NX1 = MINO(NX, NXL)                   00009540
XC = XL                                     00009550
DO 5449 IX = 1, NX1                         00009560
JJ(IX) = XC/XS                            00009570
XC = XC + XI                            00009580
5449 CONTINUE                               00009590
5451 FORMAT(' X SCALE          (', G13.6, 1X, 2A4, ')'
+   /' Y SCALE          (', G13.6, 1X, 2A4, ')'
+   /' CONCENTRATION (', G13.6, 1X, 2A4, ')'
+   /')                00009600
5452 FORMAT(' X SCALE          (', G13.6, 1X, 2A4, ')'
+   /' Y SCALE          (', G13.6, 1X, 2A4, ')'
+   /' T SCALE          (', G13.6, 1X, 2A4, ')'
+   /')                00009610
5453 FORMAT('      X' /'      Y', 30I3)       00009620
5454 FORMAT('      X' /'      Y', 30I4)       00009630
5455 FORMAT('      X' /'      Y', 30I5)       00009640
5456 FORMAT('      X' /'      Y', 30I6)
IF(BTSS) GO TO 5458
B = TC.GE.0.0
IF(B) CALL PUTR(HHTC, TC)
IF(.NOT.B) WRITE(LUW, 5001)
WRITE(LUW, 5451)
+   XS, HHXC(6), HHXC(7)                    00009650
+   , YS, HHYC(6), HHYC(7)                  00009660
+   , SC, HH9C(6), HH9C(7)                  00009670
GO TO 5459
5458 CALL PUTR(HHTE, TE)
WRITE(LUW, 5452)

```

```

+   XS, HHXC(6), HHXC(7)          00009870
+   , YS, HHYC(6), HHYC(7)          00009880
+   , SC, HHTC(6), HHTC(7)          00009890
5459  CONTINUE                      00009900
      IF(NSX.EQ.3) WRITE(LUW, 5453) (JJ(IX), IX = 1, NX1) 00009910
      IF(NSX.EQ.4) WRITE(LUW, 5454) (JJ(IX), IX = 1, NX1) 00009920
      IF(NSX.EQ.5) WRITE(LUW, 5455) (JJ(IX), IX = 1, NX1) 00009930
      IF(NSX.EQ.6) WRITE(LUW, 5456) (JJ(IX), IX = 1, NX1) 00009940
      IF(NSY.GT.1) WRITE(LUW, 1001)    00009950
      CEM = O.O                      00009960
      NCE = O                        00009970
      NCM = O                        00009980
      YC = YGM                      00009990
      DO 5479 IY = 1, NY             00010000
         XC = XL                      00010010
         DO 5469 IX = 1, NX1           00010020
            CALL CALC                  00010030
            IF(C) 5465, 5462, 5461    00010040
5461      CEM = AMAX1(CEM, 100.0*CE/C) 00010050
5462      C = C/SC                  00010060
      IF(C.GE.CM) GO TO 5463        00010070
      J = C + 0.5                   00010080
      GO TO 5467                    00010090
5463  CONTINUE                      00010100
      I = ALOG10(C)                00010110
      I = I - (NSX - 3)             00010120
      J = -I                       00010130
      IF(I.LE.9) J = J - 10.0*INT(C/(10.0**I)) 00010140
      NCM = NCM + 1                00010150
      GO TO 5467                    00010160
5465  CONTINUE                      00010170
      J = -1                       00010180
      NCE = NCE + 1                00010190
5467  CONTINUE                      00010200
      JJ(IX) = J                   00010210
      XC = XC + XI                00010220
5469  CONTINUE                      00010230
5473  FORMAT(1X, I5, 30I3)          00010240
5474  FORMAT(1X, I5, 30I4)          00010250
5475  FORMAT(1X, I5, 30I5)          00010260
5476  FORMAT(1X, I5, 30I6)
      JY = YC/YS                  00010270
      IF(NSX.EQ.3) WRITE(LUW, 5473) JY, (JJ(IX), IX = 1, NX1) 00010280
      IF(NSX.EQ.4) WRITE(LUW, 5474) JY, (JJ(IX), IX = 1, NX1) 00010290
      IF(NSX.EQ.5) WRITE(LUW, 5475) JY, (JJ(IX), IX = 1, NX1) 00010300
      IF(NSX.EQ.6) WRITE(LUW, 5476) JY, (JJ(IX), IX = 1, NX1) 00010310
      IF(NSY.EQ.2) WRITE(LUW, 1001)    00010320
      IF(NSY.EQ.3) WRITE(LUW, 1002)    00010330
      IF(NSY.EQ.4) WRITE(LUW, 1003)    00010340
      YC = YC - YI                00010350
5479  CONTINUE                      00010360
5481  FORMAT(' WORST APPROXIMATION = +-', G9.3, '%.')
5482  FORMAT(1X, I5, ' LARGE VALUE(S) IN -(MAGNITUDE+EXPONENT) FORM.')
5483  FORMAT(1X, I5, ' SOURCE(S) SHOWN AS "-1".')
      IF(CEM.GT.0.0) WRITE(LUW, 5481) CEM 00010380
      IF(NCM.GT.0 ) WRITE(LUW, 5482) NCM 00010390
      IF(NCE.GT.0 ) WRITE(LUW, 5483) NCE 00010400
      WRITE(LUW, 1001)
      XL = XC                      00010410
      NX = NX - NX1                00010420
      IF(NX.GT.0) GO TO 5440        00010430
      WRITE(LUW, 1001)
      BTSS = .FALSE.
      GO TO 1500
C      ----- .I ----- 00010440
      5500  CALL PUSH(H9IQ)          00010450
                                         00010460
                                         00010470
                                         00010480
                                         00010490
                                         00010500
                                         00010510
                                         00010520

```

	HCMD = H9IP	00010530
	GO TO 1700	00010540
C	----- .IC -----	00010550
5510	CALL PUSH(HH9C(1))	00010560
	HCMD = H9I	00010570
	GO TO 1700	00010580
C	----- .IG -----	00010590
5520	CALL PUSH(H9G)	00010600
	HCMD = H9I	00010610
	GO TO 1700	00010620
C	----- .IQ -----	00010630
5560	CONTINUE	00010640
5561	FORMAT( /	00010650
	+ , X Y	00010660
	+ , ' START MASS SOURCE ,	00010670
	+/' LOCATION LOCATION AREA ,	00010680
	+ , ' TIME FLOW RATE CONCENTR. )	00010690
5562	FORMAT( /	00010700
	+ , X Y	00010710
	+ , ' START MASS/AREA SOURCE ,	00010720
	+/' LOCATION LOCATION AREA ,	00010730
	+ , ' TIME RATE CONCENTR. )	00010740
5563	FORMAT( /	00010750
	+ , X Y	00010760
	+ , ' START VOLUME SOURCE ,	00010770
	+/' LOCATION LOCATION AREA ,	00010780
	+ , ' TIME FLOW RATE CONCENTR. )	00010790
5564	FORMAT( /	00010800
	+ , X Y	00010810
	+ , ' START VOLUME/ SOURCE ,	00010820
	+/' LOCATION LOCATION AREA ,	00010830
	+ , ' TIME AREA RATE CONCENTR. )	00010840
5565	FORMAT(1X, 6(' (', 2A4, ', ') '))	00010850
5566	FORMAT(1X, 6G13.6)	00010860
	KQMO = 0	00010870
	DO 5589 IQ = 1, NQ	00010880
	KQX = KKQX(IQ)	00010890
	KQM = KKQM(IQ)	00010900
	GO TO (5571, 5572, 5573, 5574), KQM	00010910
5571	IF(KQM.NE.KQMO) WRITE(LUW, 5561)	00010920
	H6 = HHQM(6)	00010930
	H7 = HHQM(7)	00010940
	Q = QQM(IQ)	00010950
	GO TO 5580	00010960
5572	IF(KQM.NE.KQMO) WRITE(LUW, 5562)	00010970
	H6 = HHQR(6)	00010980
	H7 = HHQR(7)	00010990
	Q = QQR(IQ)	00011000
	GO TO 5580	00011010
5573	IF(KQM.NE.KQMO) WRITE(LUW, 5563)	00011020
	H6 = HHQQ(6)	00011030
	H7 = HHQQ(7)	00011040
	Q = QQ (IQ)	00011050
	GO TO 5580	00011060
5574	IF(KQM.NE.KQMO) WRITE(LUW, 5564)	00011070
	H6 = HHQV(6)	00011080
	H7 = HHQV(7)	00011090
	Q = QQV(IQ)	00011100
C	GO TO 5580	00011110
5580	IF(KQM.NE.KQMO) WRITE(LUW, 5565)	00011120
	+ HHQL(6), HHQL(7), HHQL(6), HHQL(7), HHQA(6), HHQA(7)	00011130
	+ , HHQT(6), HHQT(7), H6 , H7 , HHQC(6), HHQC(7)	00011140
	WRITE(LUW, 5566) QQXL(IQ), QQYL(IQ), QQA (IQ)	00011150
	+ , QQT (IQ), Q , QQC (IQ)	00011160
	IF(KQX.EQ.2) WRITE(LUW, 5566) QQXM(IQ), QQYM(IQ)	00011170
	KQMO = KQM	00011180

5589 CONTINUE 00011190  
 WRITE(LUW, 1001) 00011200  
 GO TO 1500 00011210  
 C ===== .T ====== 00011220  
 5600 IF(KTE .GT. 0 .AND. KXC .NE. 0 .AND. KYC .NE. 0) GO TO 5610 00011230  
 IF(BATCH) GO TO 8120 00011240  
 CALL PUSH(HH9T(1)) 00011250  
 IF(KYC .EQ. 0) CALL PUSH(HHYC(1)) 00011260  
 IF(KXC .EQ. 0) CALL PUSH(HHXC(1)) 00011270  
 IF(KTE .EQ. 0) CALL PUSH(HHTE(1)) 00011280  
 GO TO 1500 00011290  
 5610 CONTINUE 00011300  
 BTSS = .TRUE. 00011310  
 CALL SETUP 00011320  
 XC = X9C 00011330  
 YC = Y9C 00011340  
 CALL PUTR(HHTE, TE) 00011350  
 CALL PUTR(HHXC, XC) 00011360  
 CALL PUTR(HHYC, YC) 00011370  
 CALL CALC 00011380  
 CALL PUTR(HH9T, C) 00011390  
 WRITE(LUW, 1001) 00011400  
 BTSS = .FALSE. 00011410  
 GO TO 1500 00011420  
 C ===== .TG ====== 00011430  
 5620 IF(KTE .GT. 0) GO TO 5630 00011440  
 IF(BATCH) GO TO 8120 00011450  
 CALL PUSH(H9TG) 00011460  
 HCMD = HHTE(1) 00011470  
 GO TO 1700 00011480  
 5630 CONTINUE 00011490  
 BTSS = .TRUE. 00011500  
 HCMD = H9G 00011510  
 GO TO 1700 00011520  
 C ===== ERRORS ====== 00011530  
 C ----- PARAMETER ERROR (SERIOUS) ----- 00011540  
 8110 CONTINUE 00011550  
 WRITE(LUP, 1081) 00011560  
 IF(BATCH) GO TO 1400 00011570  
 IF(BIP) GO TO 1700 00011580  
 GO TO 1500 00011590  
 C ----- PARAMETER ERROR (NON-SERIOUS) ----- 00011600  
 8120 CONTINUE 00011610  
 WRITE(LUP, 1081) 00011620  
 IF(BATCH) GO TO 1500 00011630  
 IF(BIP) GO TO 1700 00011640  
 GO TO 1500 00011650  
 C ===== END ====== 00011660  
 END 00011670  
 C ===== BLOCK DATA ====== 00011680  
 BLOCK DATA INIT 00011690  
 C ===== DECLARATIONS ====== 00011700  
 LOGICAL\*1 BERR, BATCH,BOP , BOE ,BTSS 00011710  
 + , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8 00011720  
 LOGICAL\*1 BBT , B , BIP 00011730  
 INTEGER\*4 00011740  
 + HHCMD 00011750  
 + , H , HA , HAR , HHAX, HHAY 00011760  
 + , HC , HD , HHDX, HHDY, HHDR, HHDM 00011770  
 + , HE , HF , HG , HHGG, HHGL, HHGT 00011780  
 + , HH , HI , HIP , HIL , HIR 00011790  
 INTEGER\*4 00011800  
 + , HL , HLX , HLY , HM 00011810  
 + , HO , HOD , HOP , HOE , HOT , HOW , HHP 00011820  
 + , HQ , HON , HHQE, HHQL, HHQA, HHQT 00011830  
 + , HHQM, HHQR, HHQC, HHQQ, HHQV 00011840

```

+ . HR , HHRR, HHRK, HHRD 00011850
INTEGER*4 00011860
+ HS , HSC , HSL , HSN , HSX , HSY , HHTC , HHTE 00011870
+ , HU , HHU , HHUL, HHUM, HHUT 00011880
+ , HV , HHVV, HHVG, HHVK, HHVT 00011890
+ , HHVR, HHVI, HHVD, HHVU 00011900
+ , HXY , HHXC, HHYC, HHZM, HH9C 00011910
+ , HH9T 00011920
INTEGER*4 00011930
+ H9D , H9DC, H9DG, H9DP, H9DQ, H9FF, H9G 00011940
+ , H9I , H9IC, H9IG, H9IP, H9IQ, H9TG 00011950
+ , HHC1, HHC2, HHC3 00011960
INTEGER*4 HHCMD, HCMD, H6 , H7 00011970
INTEGER*4 JJ , J , JY 00011980
COMMON /CHAR/
+ HHCMD(30) 00011990
+ . H , HA , HAR 00012000
+ . HC , HD , HHDX (7) , HHDX (7) , HHDR (7) , HHDM (7) 00012010
+ . HE , HF , HG 00012020
+ . HH , HI , HIP , HIL , HIR 00012030
+ . HL , HLX , HLY , HM 00012040
+ . HO , HOD , HOP , HOE , HOT , HOW , HHP (7) 00012050
+ . HQ , HQN , HHQE (7) , HHQL (7) , HHQA (7) , HHQT (7) 00012060
+ . HHQM (7) , HHQR (7) , HHQC (7) , HHQQ (7) , HHQV (7) 00012070
+ . HR , HHRR (7) , HHRK (7) , HHRD (7) 00012080
+ . HS , HSC , HSL , HSN , HSX , HSY , HHTC (7) , HHTE (7) 00012090
+ . HU , HHU (7) , HHUL (7) , HHUM (7) , HHUT (7) 00012100
+ . HV , HHVV (7) , HHVG (7) , HHVK (7) , HHVT (7) 00012110
+ . HHVR (7) , HHVI (7) , HHVD (7) , HHVU (7) 00012120
+ . HXY , HHXC (7) , HHYC (7) , HHZM (7) , HH9C (7) 00012130
+ . HH9T (7) 00012140
+ . H9D , H9DC, H9DG, H9DP, H9DQ, H9FF, H9G 00012150
+ , H9I , H9IC, H9IG, H9IP, H9IQ, H9TG 00012160
+ , HHC1 (18) , HHC2 (18) , HHC3 (18) 00012170
COMMON /BIT /
+ BERR, BATCH 00012180
+ BOP , BOE , BTSS 00012190
+ BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8 00012200
COMMON /INT /
+ LUL , LUM , LUR , LUP , LUE , LUW 00012210
+ MCMD 00012220
+ KDX , KDY , KG , KLX , KLY , KR 00012230
+ KTE , KVG , KVP , KVR , KXC , KYC 00012240
+ NQ , NQN , NSL , NSN , NSX , NSY 00012250
+ MQ 00012260
+ , KKQX( 10) , KKQM( 10) 00012270
COMMON /REAL/
+ UA , UD , UGL , UGT , ULC 00012280
+ , UQL , UQA , UQT , UQM , UQR , UQC , UQQ , UQV 00012290
+ , URK , URD , UTC , UVV , UVK , UVT , UVI , UVD , UVU , UZM 00012300
+ USC 00012310
+ , AX , AY , C , CE , DX , DY , DR , DM , DXT , DYT 00012320
+ , G , GL , GT , G2 , P , QE , QD 00012330
+ , R , RK , RP , RD , SC , TC , TD , TE , TPHI 00012340
+ , V , VN , VG , VP , VK , VKN , VT , VTN , VM 00012350
+ , VR , VI , VD , VU 00012360
+ , XC , X9C , XGL , XGM , XGI , XD 00012370
+ , YC , Y9C , YGL , YGM , YGI , YD , ZM 00012380
+ , QQXL( 10) , QQXM( 10) , QQYL( 10) , QQYM( 10) 00012390
+ , QQA ( 10) , QQT ( 10) , QQV ( 10) , QQ ( 10) 00012400
+ , QQC ( 10) , QQR ( 10) , QQM ( 10) 00012410
=====
CHARACTER ====== 00012420
C DATA HHCMD //I ' ', 29*' '/ 00012430
DATA H , HA , HAR // ' 'A ' 'AR '/ 00012440
DATA HHAX //AX ' 'X DI' , 'SPER' , 'SIVI' , 'TY ' 'FT ' ' '/ 00012450
DATA HHAY //AY ' 'Y DI' , 'SPER' , 'SIVI' , 'TY ' 'FT ' ' '/ 00012460

```

DATA HC , HD //C , 'D // 00012510  
 DATA HHDX //DX //X DI , 'SPER , 'SION , ' , 'FT2// , 'D // 00012520  
 DATA HHDY //DY //Y DI , 'SPER , 'SION , ' , 'FT2// , 'D // 00012530  
 DATA HHDR //DR //DISP , 'ERSI , 'ON R , 'ATIO , ' , ' / 00012540  
 DATA HHDM //DM //MOL , 'DIF , 'FUSI , 'ON , 'FT2// , 'D // 00012550  
 DATA HE , HF //E , 'F , 'G // 00012560  
 DATA HHGG //GG //DECA , 'Y GA , 'MMA , ' , ' / 00012570  
 DATA HHGL //GL //DECA , 'Y LA , 'MBDA , ' , '1/YR , ' / 00012580  
 DATA HHGT //GT //DECA , 'Y HA , 'LF-L , 'IFE , 'YR , ' / 00012590  
 DATA HH , HI //H , 'I // 00012600  
 DATA HIP , HIL , HIR //IP , 'IL , 'IR , ' / 00012610  
 DATA HL , HLX , HLY , HM //L , 'LX , 'LY , 'M // 00012620  
 DATA HO , HOD , HOW //O , 'OD , 'OW // 00012630  
 DATA HOP , HOE , HOT //OP , 'OE , 'OT // 00012640  
 DATA HHP //P , 'PORO , 'SITY , ' , ' , ' / 00012650  
 DATA HQ , HQN //Q , 'QN // 00012660  
 DATA HHQL //QL //SOUR , 'CE L , 'OCAT , 'ION , 'FT , ' / 00012670  
 DATA HHQA //QA //SOUR , 'CE A , 'REA , ' , 'FT2 , ' / 00012680  
 DATA HHQT //QT //SOUR , 'CE T , 'IME , ' , 'DAYS , ' / 00012690  
 DATA HHQM //QM //MASS , 'FLO , 'W RA , 'TE , 'LBM , 'D // 00012700  
 DATA HHQR //QR //MASS , 'ARE , 'A RA , 'TE , 'LB/F , 'T2/D // 00012710  
 DATA HHQC //QC //SOUR , 'CE C , 'ONCE , 'NTR , 'MG/L , ' / 00012720  
 DATA HHQQ //QQ //VOLU , 'ME F , 'LOW , 'RATE , 'FT3// , 'D // 00012730  
 DATA HHQV //QV //VOLU , 'ME/A , 'REA , 'RATE , 'FT/D , ' / 00012740  
 DATA HHQE //QE //ACCU , 'RACY , ' , ' , ' / 00012750  
 DATA HR //R // 00012760  
 DATA HHRR //RR //RETA , 'RDAT , 'ION , ' , ' , ' / 00012770  
 DATA HHRK //RK //SORP , 'TION , 'RAT , 'E , 'FT3// , 'LBM // 00012780  
 DATA HHRD //RD //AQUI , 'FER , 'DENS , 'ITY , 'LBM// , 'FT3 // 00012790  
 DATA HS , HSC , HSL //S , 'SC , 'SL // 00012800  
 DATA HSX , HSN , HSY //SX , 'SN , 'SY // 00012810  
 DATA HHTC //T , 'SAMP , 'LE T , 'IME , ' , 'DAYS , ' / 00012820  
 DATA HHTE //TE //ST , 'EADY , 'STA , 'TE , ' , ' / 00012830  
 DATA HU //U // 00012840  
 DATA HHUL //UL //LENG , 'TH , ' , ' / 00012850  
 DATA HHUM //UM //MASS , ' , ' / 00012860  
 DATA HHUT //UT //TIME , ' , ' / 00012870  
 DATA HV //V // 00012880  
 DATA HHVV //VV //VELO , 'CITY , ' , ' / 00012890  
 DATA HHVG //VG //GRAD , 'IENT , ' , ' / 00012900  
 DATA HHVK //VK //PERM , 'EABI , 'LITY , ' / 00012910  
 DATA HHVT //VT //TRAN , 'SMIS , 'SIVI , 'TY , 'FT2// , 'D // 00012920  
 DATA HHVR //VR //VELO , 'CITY , 'V.W , 'ATER , ' / 00012930  
 DATA HHVI //VI //INTR , 'INSI , 'C PE , 'RM , 'FT2 , ' / 00012940  
 DATA HHVD //VD //DENS , 'ITY , ' / 00012950  
 DATA HHVU //VU //VISC , 'OSIT , 'Y , ' / 00012960  
 DATA HXY //XY // 00012970  
 DATA HHXC //X , 'X LO , 'CATI , 'ON , ' / 00012980  
 DATA HHYC //Y , 'Y LO , 'CATI , 'ON , ' / 00012990  
 DATA HHZM //Z , 'THIC , 'KNES , 'S , ' / 00013000  
 DATA HH9C //C , 'CONC , 'ENTR , 'ATIO , 'N , 'MG/L , ' / 00013010  
 DATA HH9T //T , 'STEA , 'DY S , 'TATE , ' , 'DAYS , ' / 00013020  
 DATA H9D , H9DC , H9DG //D , 'DC , 'DG // 00013030  
 DATA H9DP , H9DQ //DP , 'DQ // 00013040  
 DATA H9FF , H9G //FF , 'G // 00013050  
 DATA H9I , H9IC , H9IG //I , 'IC , 'IG // 00013060  
 DATA H9IP , H9IQ , H9TG //IP , 'IQ , 'TG // 00013070  
 C ----- BIT ----- 00013080  
 C ----- I/O OPTIONS ----- 00013090  
 DATA  
 + BATCH / .FALSE./ 00013100  
 + , BOP , BOE , BTSS / .TRUE. , .FALSE. , .FALSE./ 00013120  
 + , BT1 , BT2 , BT3 , BT4 / .FALSE. , .FALSE. , .FALSE. , .FALSE./ 00013130  
 + , BT5 , BT6 , BT7 , BT8 / .FALSE. , .FALSE. , .FALSE. , .FALSE./ 00013140  
 C ----- INTEGER ----- 00013150  
 C ----- I/O UNITS, DIMENSIONS ----- 00013160

```

      DATA                                     00013170
+   LUL , LUM          / 3, 10/               00013180
+   LUR , LUP , LUE , LUW / 5, 6, 6, 6/       00013190
+   MCMD, MQ          / 30, 10/              00013200
C   ----- FLAGS AND COUNTS -----           00013210
      DATA                                     00013220
+   KDX , KDY , KG , KLX , KLY / 0, 0, 0, 0, 0/ 00013230
+   KR , KTE , KVG , KVP , KVR / 0, 0, 0, 0, 0/ 00013240
+   KXC , KYC , NQ , NQN / 0, 0, 0, 100/        00013250
+   NSL , NSN , NSX , NSY / 80, 0, 6, 2/        00013260
C   ===== REAL ====== 00013270
C   ----- UNITS, PARAMETERS -----           00013280
      DATA                                     00013290
+   UA , UD          / 1.0                 1.0      / 00013300
+   UGL , UGT , ULC / 2.737909E- 3, 365.2422 1.0      / 00013310
+   UQL , UQA , UQT / 1.0                 1.0      . 1.0      / 00013320
+   UQM , UQR , UQC / 1.0                 1.0      . 62.42796E- 6/ 00013330
+   UQQ , UQV / 1.0                 1.0      / 00013340
+   URK , URD , UTC / 1.0                 1.0      . 1.0      / 00013350
+   UVV , UVK , UVT / 1.0                 1.0      . 1.0      / 00013360
+   UVI , UVD , UVU / 1.0                 1.0      . 1.0      / 00013370
+   UZM , USC          / 1.0                 62.42796E- 6/ 00013380
+   DM , QE , SC / 0.0                 0.1      , 1.0      / 00013390
END                                         00013400
C   ===== PUSH ====== 00013410
SUBROUTINE PUSH(HO)                         00013420
LOGICAL*1          BERR, BATCH,BOP , BOE ,BTSS 00013430
+   BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8 00013440
INTEGER*4
+   HHCMD                         00013450
+   H , HA , HAR , HHAX, HHAY 00013470
+   HC , HD , HHDX, HHDY, HHDR, HHDM 00013480
+   HE , HF , HG , HHGG, HHGL, HHGT 00013490
+   HH , HI , HIP , HIL , HIR 00013500
INTEGER*4
+   HL , HLX , HLY , HM 00013520
+   HO , HOD , HOP , HOE , HOT , HOW , HHP 00013530
+   HQ , HQN , HHQE, HHQL, HHOA, HHQT 00013540
+   HHQM, HHQR, HHQC, HHQQ, HHQV 00013550
+   HR , HHRR, HHRK, HHRD 00013560
INTEGER*4
+   HS , HSC , HSL , HSN , HSX , HSY , HHTC , HHTE 00013580
+   HU , HHU , HHUL, HHUM, HHUT 00013590
+   HV , HHVV, HHVG, HHVK, HHVT 00013600
+   HHVR, HHVI, HHVD, HHVU 00013610
+   HXY , HHXC, HHYC, HHZM, HH9C 00013620
+   HH9T                         00013630
INTEGER*4
+   H9D , H9DC, H9DG, H9DP, H9DQ, H9FF, H9G 00013650
+   H9I , H9IC, H9IG, H9IP, H9IQ, H9TG 00013660
+   HHC1 , HHC2, HHC3 00013670
INTEGER*4          HO , H1 , H2 00013680
COMMON /CHAR/
+   HHCMD(30)                      00013690
+   H , HA , HAR , HHAX (7) , HHAY (7) 00013710
+   HC , HD , HHDX (7) , HHDY (7) , HHDR (7) , HHDM (7) 00013720
+   HE , HF , HG , HHGG (7) , HHGL (7) , HHGT (7) 00013730
+   HH , HI , HIP , HIL , HIR 00013740
+   HL , HLX , HLY , HM 00013750
+   HO , HOD , HOP , HOE , HOT , HOW , HHP (7) 00013760
+   HQ , HQN , HHQE (7) , HHQL (7) , HHOA (7) , HHQT (7) 00013770
+   HHQM (7) , HHQR (7) , HHQC (7) , HHQQ (7) , HHQV (7) 00013780
+   HR , HHRR (7) , HHRK (7) , HHRD (7) 00013790
+   HS , HSC , HSL , HSN , HSX , HSY , HHTC (7) , HHTE (7) 00013800
+   HU , HHU (7) , HHUL (7) , HHUM (7) , HHUT (7) 00013810
+   HV , HHVV (7) , HHVG (7) , HHVK (7) , HHVT (7) 00013820

```

```

+ , HHVR (7) , HHVI (7) , HHVD (7) , HHVU (7) 00013830
+ , HXY . HHXC (7) , HHYC (7) , HHZM (7) , HH9C (7) 00013840
+ , HH9T (7) 00013850
+ , H9D , H9DC, H9DG, H9DP, H9DQ, H9FF, H9G 00013860
+ , H9I , H9IC, H9IG, H9IP, H9IQ, H9TG 00013870
+ , HHC1 (18) , HHC2 (18) , HHC3 (18) 00013880
COMMON /BIT /
+ BERR, BATCH 00013890
+ BOP , BOE , BTSS 00013900
+ BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8 00013910
COMMON /INT /
+ LUL , LUM , LUR , LUP , LUE , LUW 00013920
+ MCMD 00013930
+ KDX , KDY , KG , KLX , KLY , KR 00013940
+ KTE , KVG , KVP , KVR , KXC , KYC 00013950
+ NQ , NQN , NSL , NSN , NSX , NSY 00013960
+ MQ 00013970
+ KKQX( 10) , KKQM( 10) 00013980
H1 = HO 00013990
DO 5900 I = 1, MCMD 00014000
H2 = HHCMD(I)
HHCMD(I) = H1 00014010
IF(H1.EQ.H) RETURN 00014020
H1 = H2 00014030
5900 CONTINUE 00014040
WRITE(LUP, 9001) MCMD, H1 00014050
9001 FORMAT(' STACK SPACE OF', I5, ' COMMANDS EXCEEDED.')
+ / ' COMMAND ', A4, ' LOST.' ) 00014060
END 00014070
C ===== GETI ===== 00014120
SUBROUTINE GETI(KO, LO, MO) 00014130
LOGICAL*1 BERR, BATCH,BOP , BOE , BTSS 00014140
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8 00014150
COMMON /BIT /
+ BERR, BATCH 00014160
+ BOP , BOE , BTSS 00014170
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8 00014180
COMMON /INT /
+ LUL , LUM , LUR , LUP , LUE , LUW 00014190
+ MCMD 00014200
+ KDX , KDY , KG , KLX , KLY , KR 00014210
+ KTE , KVG , KVP , KVR , KXC , KYC 00014220
+ NQ , NQN , NSL , NSN , NSX , NSY 00014230
+ MQ 00014240
+ KKQX( 10) , KKQM( 10) 00014250
1022 FORMAT(1OI5) 00014260
1032 FORMAT(1X, 1OI5) 00014270
READ(LUR, 1022) K1 00014280
IF(BOE) WRITE(LUE, 1032) K1 00014290
BERR = .TRUE.
IF(LO.LT.MO .AND. (K1.LT.LO .OR. K1.GT.MO) ) RETURN 00014300
BERR = .FALSE.
KO = K1 00014310
RETURN 00014320
END 00014330
C ===== GETR ===== 00014340
SUBROUTINE GETR(HHO, RO, BO) 00014350
LOGICAL*1 BERR, BATCH,BOP , BOE , BTSS 00014360
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8 00014370
LOGICAL*1 BO 00014380
INTEGER*4 HHO , H 00014390
DIMENSION HHO(7) 00014400
COMMON /BIT /
+ BERR, BATCH 00014410
+ BOP , BOE , BTSS 00014420
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8 00014430

```

```

COMMON /INT /
+ LUL , LUM , LUR , LUP , LUE , LUW 00014490
+ , MCMD 00014500
+ , KDX , KDY , KG , KLX , KLY , KR 00014510
+ , KTE , KVG , KVP , KVR , KXC , KYC 00014520
+ , NQ , NQN , NSL , NSN , NSX , NSY 00014530
+ , MQ 00014540
+ , KKQX( 10) , KKQM( 10) 00014550
DATA H '/ '/ 00014560
1011 FORMAT(1X, 4A4, ', 2A4, ':', / ', ?') 00014570
1012 FORMAT(1X, 4A4, '(UNITLESS):', / ', ?') 00014580
1023 FORMAT(E15.0) 00014590
1033 FORMAT(1X, G15.7) 00014600
IF(.NOT.BOP) GO TO 3000 00014610
IF(HHO(6).EQ.H) GO TO 2500 00014620
WRITE(LUP, 1011) (HHO(I), I = 2, 7) 00014630
GO TO 3000 00014640
2500 WRITE(LUP, 1012) (HHO(I), I = 2, 5) 00014650
3000 READ(LUR, 1023) R1 00014660
IF(BOE) WRITE(LUE, 1033) R1 00014670
BERR = .TRUE. 00014680
IF(BO .AND. R1.LE.O) RETURN 00014690
BERR = .FALSE. 00014700
R0 = R1 00014710
RETURN 00014720
END 00014730
00014740
C ===== PUTR ===== 00014750
SUBROUTINE PUTR(HHO, RO) 00014760
LOGICAL*1 BERR, BATCH,BOP , BOE , BTSS 00014770
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8 00014780
INTEGER*4 HHO 00014790
DIMENSION HHO(7)
COMMON /BIT /
+ BERR, BATCH 00014800
+ , BOP , BOE , BTSS 00014810
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8 00014820
COMMON /INT /
+ LUL , LUM , LUR , LUP , LUE , LUW 00014830
+ , MCMD 00014840
+ , KDX , KDY , KG , KLX , KLY , KR 00014850
+ , KTE , KVG , KVP , KVR , KXC , KYC 00014860
+ , NQ , NQN , NSL , NSN , NSX , NSY 00014870
+ , MQ 00014880
+ , KKQX( 10) , KKQM( 10) 00014890
1001 FORMAT(1X, 4A4, '=', G13.6, 1X, 2A4) 00014900
WRITE(LUW, 1001) (HHO(I), I = 2, 5), RO, HHO(6), HHO(7) 00014910
RETURN 00014920
END 00014930
C ===== PUTH ===== 00014940
SUBROUTINE PUTH(HHO, LUO) 00014950
LOGICAL*1 BERR, BATCH,BOP , BOE , BTSS 00014960
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8 00014970
INTEGER*4 HHO , H 00014980
DIMENSION HHO(18)
COMMON /BIT /
+ BERR, BATCH 00014990
+ , BOP , BOE , BTSS 00015000
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8 00015010
COMMON /INT /
+ LUL , LUM , LUR , LUP , LUE , LUW 00015020
+ , MCMD 00015030
+ , KDX , KDY , KG , KLX , KLY , KR 00015040
+ , KTE , KVG , KVP , KVR , KXC , KYC 00015050
+ , NQ , NQN , NSL , NSN , NSX , NSY 00015060
+ , MQ 00015070
+ , KKQX( 10) , KKQM( 10) 00015080
00015090
00015100
00015110
00015120
00015130
00015140

```

```

      DATA H //    /
1001 FORMAT(1X, 18A4)          00015150
      N = 18                   00015160
      DO 2900 I = 1, 17         00015170
      IF(HHO(N).NE.H) GO TO 3000 00015180
      N = N - 1                 00015190
2900   CONTINUE                00015200
3000   CONTINUE                00015210
      WRITE(LU0, 1001) (HHO(I), I = 1, N) 00015220
      RETURN                    00015230
      END                      00015240
      00015250
C      ===== SETUP ====== 00015260
      SUBROUTINE SETUP          00015270
      LOGICAL*1     BERR, BATCH,BOP , BOE , BTSS 00015280
+     , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8 00015290
      COMMON /BIT /
+     BERR, BATCH             00015300
+     . BOP , BOE , BTSS       00015310
+     . BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8 00015320
      COMMON /INT /
+     LUL , LUM , LUR , LUP , LUE , LUW        00015330
+     . MCMD                  00015340
+     . KDX , KDY , KG , KLX , KLY , KR        00015350
+     . KTE , KVG , KVP , KVR , KXC , KYC       00015360
+     . NQ , NQN , NSL , NSN , NSX , NSY       00015370
+     . MQ                     00015380
+     . KKQX( 10) , KKQM( 10)      00015390
      COMMON /REAL/
+     UA , UD , UGL , UGT , ULC        00015400
+     . UQL , UQA , UQT , UQM , UQR , UQC , UQQ , UQV 00015410
+     . URK , URD , UTC , UVV , UVK , UVT , UVI , UVD , UVU , UZM 00015420
+     . U9C                   00015430
+     . AX , AY , C , CE , DX , DY , DR , DM , DXT , DYT 00015440
+     . G , GL , GT , G2 , P , QE , QD        00015450
+     . R , RK , RP , RD , SC , TC , TD , TE , TPHI 00015460
+     . V , VN , VG , VP , VK , VKN , VT , VTN , VM 00015470
+     . VR , VI , VD , VU                   00015480
+     . XC , X9C , XGL , XGM , XGI , XD        00015490
+     . YC , Y9C , YGL , YGM , YGI , YD , ZM 00015500
+     . QQXL( 10) , QQXM( 10) , QQYL( 10) , QQYM( 10) 00015510
+     . QQA ( 10) , QQT ( 10) , QQV ( 10) , QQ ( 10) 00015520
+     . QQC ( 10) , QQR ( 10) , QQM ( 10) 00015530
      C----- CALCULATE BASIC PARAMETERS ----- 00015540
      V1 = V *UVV                00015550
      V2 = V1*V1                 00015560
      IF(KDX.EQ.2 ) DX = AX*UA*V1/ UD        00015570
      IF(KDX.EQ.1 ) AX = DX*UD  /(V1*UA)      00015580
      IF(KDY.EQ.3 ) DY = DX  / DR            00015590
      IF(KDY.EQ.2 ) DY = AY*UA*V1/ UD        00015600
      IF(KDY.NE.2 ) AY = DY*UD  /(V1*UA)      00015610
      IF(KDY.LT.3 ) DR = DX  / DY            00015620
      DXT = DX + DM                00015630
      DYT = DY + DM                00015640
      D1  = DXT*UD                00015650
      D2  = SQRT(D1*DYT*UD)        00015660
      IF(KG .EQ.3 ) GL = ALOG(2.0)/(GT*UGT*UGL) 00015670
      IF(KG .GE.2 ) G  = 1.0 + 4.0*GL*UGL*D1/V2 00015680
      IF(KG .LT.2 ) GL = (G - 1.0)*V2/(4.0*D1*UGL) 00015690
      IF(KG .LT.3 .AND. GL.GT.0.) GT = ALOG(2.0)/(GL*UGL*UGT) 00015700
      G2 = SQRT(G)                00015710
      C----- NORMALIZING VARIABLES ----- 00015720
      XD = D1  /(G2*V1)           00015730
      YD = D2  /(G2*V1)           00015740
      TD = R *D1/(G *V2)          00015750
      QD = P *ZM*UZM*D2          00015760
      RETURN                      00015770
      00015780
      00015790
      00015800

```

```

C      END                               00015810
      ===== CALC ====== 00015820
      SUBROUTINE CALC                   00015830
      LOGICAL*1   BERR, BATCH,BOP , BOE , BTSS    00015840
+     , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8  00015850
      COMMON /BIT /
+     BERR, BATCH                   00015860
+     , BOP , BOE , BTSS           00015870
+     , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8  00015880
      COMMON /INT /
+     LUL , LUM , LUR , LUP , LUE , LUW          00015890
+     , MCMD                         00015900
+     , KDX , KDY , KG , KLX , KLY , KR          00015910
+     , KTE , KVG , KVP , KVR , KXC , KYC         00015920
+     , NQ , NQN , NSL , NSN , NSX , NSY         00015930
+     , MQ                           00015940
+     , KKQX( 10) , KKQM( 10)                  00015950
      COMMON /REAL/
+     UA , UD , UGL , UGT , ULC          00015960
+     , UQL , UQA , UQT , UQM , UQR , UQC , UQQ , UQV 00015970
+     , URK , URD , UTC , UVV , UVK , UVT , UVI , UVD , UVU , UZM 00015980
+     , U9C                         00015990
+     , AX , AY , C , CE , DX , DY , DR , DM , DXT , DYT 00016000
+     , G , GL , GT , G2 , P , QE , QD          00016010
+     , R , RK , RP , RD , SC , TC , TD , TE , TPHI 00016020
+     , V , VN , VG , VP , VK , VKN , VT , VTN , VM 00016030
+     , VR , VI , VD , VU                         00016040
+     , XC , X9C , XGL , XGM , XGI , XD          00016050
+     , YC , Y9C , YGL , YGM , YGI , YD , ZM        00016060
+     , QQXL( 10) , QQXM( 10) , QQYL( 10) , QQYM( 10) 00016070
+     , QQA ( 10) , QQT ( 10) , QQV ( 10) , QQ ( 10) 00016080
+     , QQC ( 10) , QQR ( 10) , QQM ( 10)          00016090
      DATA WPI / 3.14159265 /
X = XC*ULC          00016100
Y = YC*ULC          00016110
T = TC*UTC          00016120
E = 2.0              00016130
C = 0.                00016140
CE = 0.              00016150
CR = 0.              00016160
TM = QQT(1)*UQT          00016170
DO 5390 IQ = 1, NQ          00016180
TQ = QQT(IQ)*UQT          00016190
TM = AMAX1(TM,TQ)          00016200
IF(T.GE.O. .AND. TQ.GE.T) GO TO 5390 00016210
KQX = KKQX(IQ)          00016220
IF(KQX.LT.O) GO TO 3000 00016230
XL = QQXL(IQ)*UQL          00016240
YL = QQYL(IQ)*UQL          00016250
GO TO (2100, 2200), KQX 00016260
2100    CONTINUE          00016270
      NX = 1              00016280
      XI = O.            00016290
      NY = 1              00016300
      YI = O.            00016310
      S2 = QQA (IQ)*UQA          00016320
      QDA = QD            00016330
      GO TO 2900          00016340
2200    CONTINUE          00016350
      XM = QQXM(IQ)*UQL          00016360
      YM = QQYM(IQ)*UQL          00016370
      RN = AMAX1(X-XM, XL-X, Y-YM, YL-Y) 00016380
      IF(RN.LE.O.) GO TO 9100 00016390
      XI = XM - XL          00016400
      YI = YM - YL          00016410
      XN = NQN             00016420

```

```

S = SQRT(AMAX1(50.0*XD*QE*RN/(1.0 + DR), XI*YI/XN) )
NX = NQN - MAX1(XN - XI/S, 0.)
XI = XI/FLOAT(NX)
NY = NQN - MAX1(XN - YI/S, 0.)
YI = YI/FLOAT(NY)
S2 = AMAX1(XI, YI)
S2 = S2*S2
QDA = FLOAT(NX)*FLOAT(NY)*QD
2900 CONTINUE
ER = O.02*S2*(1.0 + DR)/(XD*XD)
IF(T.GE.O.) ER = ER + O.2
QMO = O.
3000 CONTINUE
QM = QQM(IQ)*UQM
QN = (QM - QMO)/QDA
YQ = YL + YI*O.5
DO 5290 IY = 1, NY
YN = (Y - YQ)/YD
XQ = XL + XI*O.5
DO 5190 IX = 1, NX
XN = (X - XQ)/XD
RN = SQRT(XN*XN + YN*YN)
IF(BTSS) GO TO 5000
IF(RN.LE.O.) GO TO 9100
IF(T.LT.O.) GO TO 4500
TN = (T - TQ)/TD
WO = (RN - TN)/SQRT(4.0*TN)
E = ERFC(WO)
4500 CONTINUE
CY = EXP( (XN/G2 - RN)*O.5)
CR = 4.0*SQRT(WPI*RN)
W = QN*CY*E/CR
5001 FORMAT(1X, 5G15.7)
IF(BT5) WRITE(LUW, 5001)
+ X, XQ, XD, XN, CR
+ Y, YQ, YD, YN, CY
+ T, TQ, TD, TN, E
+ QM, QMO, QDA, QN, W
C = C + W
CE = CE + W*ER/RN
GO TO 5090
5000 CONTINUE
CR = AMAX1(CR, RN)
5090 CONTINUE
XQ = XQ + XI
5190 CONTINUE
YQ = YQ + YI
5290 CONTINUE
QMO = QM
5390 CONTINUE
IF(BTSS) GO TO 5500
C = C/U9C
CE = CE/U9C
GO TO 5990
5500 CONTINUE
IF(CR .GT. O.) C = CR / (SQRT(TPHI * TPHI + CR) + TPHI)
C = (TM + C * C * TD) / UTC
5990 CONTINUE
BERR = .FALSE.
RETURN
9100 CONTINUE
C = -1.0
CE = O.0
BERR = .TRUE.
RETURN
END

```

C ====== ERFC ======00017140  
FUNCTION ERFC(WO) 00017150  
DATA EO, E1, E2, E3, E4, E5 00017160  
+ / .32759, .25438, -.28540, 1.42141, -1.45315, 1.06141 / 00017170  
W = 1.0/(1.0 + EO\*ABS(WO)) 00017180  
W = W\*(E1 + W\*(E2 + W\*(E3 + W\*(E4 + W\*E5) ) ) ) 00017190  
E = W\*EXP(-(WO\*WO)) 00017200  
IF(WO.LT.0.) E = 2.0 - E 00017210  
ERFC = E 00017220  
RETURN 00017230  
END 00017240

II-F-1

PROGRAM SOURCE FOR IBM PC

APPENDIX II-F

\*\*\*\*\* TSO FOREGROUND HARDCOPY \*\*\*\*\*  
DSNAME=U11236C.FPLUMEPC.CNTL

C GROUNDWATER PLUME CALCULATION PROGRAM 00000010  
C D.C. KENT, HYDROGEOLOGIST, PRINCIPAL INVESTIGATOR 00000020  
C FRED WITZ AND LORRAINE LEMASTER, PROGRAMMERS 00000030  
C GEOLOGY DEPARTMENT, OKLAHOMA STATE UNIVERSITY 00000040  
C STILLWATER, OKLAHOMA, 74078 00000050  
C FORTRAN VERSION (SEE VERSION BELOW) 00000060  
C TESTED WITH: 00000070  
C MICROSOFT FORTRAN ON IBM PC (77 STANDARD) 00000080  
C ===== DECLARATIONS ====== 00000090  
LOGICAL\*2 BERR, BATCH,BOP , BOE ,BTSS 00000100  
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8 00000110  
LOGICAL\*2 BBT , B , BIP 00000120  
CHARACTER\*4 00000130  
+ HHCMD 00000140  
+ , H , HA , HAR , HHAX , HHAY 00000150  
+ , HC , HD , HHDX , HHDY , HHDR , HHDM 00000160  
+ , HE , HF , HG , HHGG , HHGL , HHGT 00000170  
+ , HH , HI , HIP , HIL , HIR 00000180  
CHARACTER\*4 00000190  
+ HL , HLX , HLY , HM 00000200  
+ , HO , HOD , HOP , HOE , HOT , HOW , HHP 00000210  
+ , HQ , HQN , HHQE , HHQL , HHQA , HHQT 00000220  
+ , HHQM , HHQR , HHQC , HHQQ , HHQV 00000230  
+ , HR , HHRR , HHRK , HHRD 00000240  
CHARACTER\*4 00000250  
+ HS , HSC , HSL , HSN , HSX , HSY , HHTC , HHTE 00000260  
+ , HU , HHU , HHUL , HHUM , HHUT 00000270  
+ , HV , HHVV , HHVG , HHVK , HHVT 00000280  
+ , HHVR , HHVI , HHVD , HHVU 00000290  
+ , HXY , HHXC , HHYC , HHZM , HH9C 00000300  
+ , HH9T 00000310  
CHARACTER\*4 00000320  
+ H9D , H9DC , H9DG , H9DP , H9DQ , H9FF , H9G 00000330  
+ , H9I , H9IC , H9IG , H9IP , H9IQ , H9TG 00000340  
+ , HHC1 , HHC2 , HHC3 00000350  
CHARACTER\*4 HHC0M,HCMD, H6 , H7 00000360  
INTEGER\*4 JJ , J , JY 00000370  
DIMENSION BBT(8), HHCOM(381), KKCOM(19), RRCOM(79), JJ(30) 00000380  
COMMON /CHAR/ 00000390  
+ HHCMD(30) 00000400  
+ , H , HA , HAR , HHAX (7) , HHAY (7) 00000410  
+ , HC , HD , HHDX (7) , HHDY (7) , HHDR (7) , HHDM (7) 00000420  
+ , HE , HF , HG , HHGG (7) , HHGL (7) , HHGT (7) 00000430  
+ , HH , HI , HIP , HIL , HIR 00000440  
+ , HL , HLX , HLY , HM 00000450  
+ , HO , HOD , HOP , HOE , HOT , HOW , HHP (7) 00000460  
+ , HQ , HQN , HHQE (7) , HHQL (7) , HHQA (7) , HHQT (7) 00000470  
+ , HHQM (7) , HHQR (7) , HHQC (7) , HHQQ (7) , HHQV (7) 00000480  
+ , HR , HHRR (7) , HHRK (7) , HHRD (7) 00000490  
+ , HS , HSC , HSL , HSN , HSX , HSY , HHTC (7) , HHTE (7) 00000500  
+ , HU , HHU (7) , HHUL (7) , HHUM (7) , HHUT (7) 00000510  
+ , HV , HHVV (7) , HHVG (7) , HHVK (7) , HHVT (7) 00000520  
+ , HHVR (7) , HHVI (7) , HHVD (7) , HHVU (7) 00000530  
+ , HXY , HHXC (7) , HHYC (7) , HHZM (7) , HH9C (7) 00000540  
+ , HH9T (7) 00000550  
+ , H9D , H9DC , H9DG , H9DP , H9DQ , H9FF , H9G 00000560  
+ , H9I , H9IC , H9IG , H9IP , H9IQ , H9TG 00000570  
+ , HHC1 (18) , HHC2 (18) , HHC3 (18) 00000580  
COMMON /BIT / 00000590  
+ BERR, BATCH 00000600  
+ , BOP , BOE ,BTSS 00000610  
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8 00000620

```

COMMON /INTE/
+   LUL , LUM , LUR , LUP , LUE , LUW          00000630
+   MCMD                                         00000640
+   KDX , KDY , KG , KLX , KLY , KR           00000650
+   KTE , KVG , KVP , KVR , KXC , KYC          00000660
+   NQ , NQN , NSL , NSN , NSX , NSY          00000670
+   MQ                                         00000680
+   KKQX( 10) , KKQM( 10)                      00000690
COMMON /REAL/
+   UA , UD , UGL , UGT , ULC          00000700
+   UQL , UQA , UQT , UQM , UQR , UQC , UQQ , UQV 00000710
+   URK , URD , UTC , UVV , UVK , UVT , UVI , UVD , UVU , UZM 00000720
+   U9C                                         00000730
+   AX , AY , C , CE , DX , DY , DR , DM , DXT , DYT 00000740
+   G , GL , GT , G2 , P , QE , QD           00000750
+   R , RK , RP , RD , SC , TC , TD , TE , TPHI 00000760
+   V , VN , VG , VP , VK , VKN , VT , VTN , VM 00000770
+   VR , VI , VD , VU                         00000780
+   XC , X9C , XGL , XGM , XGI , XD          00000790
+   YC , Y9C , YGL , YGM , YGI , YD , ZM      00000800
+   QQXL( 10) , QQXM( 10) , QQYL( 10) , QQYM( 10) 00000810
+   QQA ( 10) , QQT ( 10) , QQV ( 10) , QQ ( 10) 00000820
+   QQC ( 10) , QQR ( 10) , QQM ( 10)          00000830
EQUIVALENCE (HHCOM(1), H), (KKCOM(1), KDX), (RRCOM(1), UA) 00000840
EQUIVALENCE (BBT(1), BT1)                           00000850
DATA NACC, NEXP / 20, 80 /                         00000860
DATA MBT, MHCOM, MKCOM, MRCOM, MJ / 8, 381, 19, 76, 30 / 00000870
DATA BIP /.TRUE./                                  00000880
C ===== GLOBAL FORMATS ====== 00000890
00000900
1001 FORMAT(1X)                                     00000910
1002 FORMAT('O')                                    00000920
1003 FORMAT('O/')                                   00000930
1021 FORMAT(1BA4)                                 00000940
1023 FORMAT(5E15.0)                               00000950
1031 FORMAT(1X, 18A4)                             00000960
1033 FORMAT(1X, 5G15.7)                           00000970
1081 FORMAT(' INVALID OR MISSING VALUE.')        00000980
00000990
C ===== BEGIN EXECUTION ====== 00001000
1101 FORMAT(' GROUNDWATER PLUME CALCULATION PROGRAM' 00001010
+   / ' D.C. KENT, HYDROGEOLOGIST, PRINCIPAL INVESTIGATOR' 00001020
+   / ' FRED WITZ AND LORRAINE LEMASTER, PROGRAMMERS'    00001030
+   / ' GEOLGY DEPARTMENT, OKLAHOMA STATE UNIVERSITY'   00001040
+   / ' FORTRAN VERSION 1.2 (1985, JANUARY)' / )       00001050
CALL INIT                                         00001060
WRITE(LUP, 1101)                                00001070
GO TO 1500                                       00001080
C ===== INPUT LOOP ====== 00001090
1400 CONTINUE                                     00001100
1401 FORMAT(' COMMAND?')                         00001110
IF(BOP) WRITE(LUP, 1401)                         00001120
READ (LUR, 1021) (HHCMD(I), I = 1, 18)          00001130
IF(BOE) CALL PUTH(HHCMD, LUE)                   00001140
HHCMD(19) = H                                    00001150
C ===== NEXT COMMAND LOOP: POP ====== 00001160
1500 CONTINUE                                     00001170
HCMD = HHCMD(1)                                 00001180
IF(HCMD.EQ.H) GO TO 1400                         00001190
DO 1580 I = 2, MCMD                            00001200
  HHCMD(I - 1) = HHCMD(I)                       00001210
  IF(HHCMD(I).EQ.H) GO TO 1590                 00001220
1580 CONTINUE                                     00001230
HHCMD(MCMD) = H                                00001240
1590 CONTINUE                                     00001250
C ===== RE-EXECUTE LOOP: SIEVE ====== 00001260
1700 CONTINUE                                     00001270
IF(BT2) CALL PUTH(HHCMD, LUE)                   00001280

```

IF(BT1) WRITE(LUE,1031) HCMD		00001290
IF(HCMD.EQ. H ) GO TO 1400		00001300
IF(HCMD.EQ. HA ) GO TO 2100		00001310
IF(HCMD.EQ.HMAX (1) ) GO TO 2110		00001320
IF(HCMD.EQ.HHAY (1) ) GO TO 2120		00001330
IF(HCMD.EQ. HAR ) GO TO 2330		00001340
IF(HCMD.EQ. HC ) GO TO 2200		00001350
IF(HCMD.EQ. HD ) GO TO 2300		00001360
IF(HCMD.EQ.HHDX (1) ) GO TO 2310		00001370
IF(HCMD.EQ.HHDY (1) ) GO TO 2320		00001380
IF(HCMD.EQ.HHDR (1) ) GO TO 2330		00001390
IF(HCMD.EQ.HHDM (1) ) GO TO 2340		00001400
IF(HCMD.EQ. HE ) GO TO 2400		00001410
IF(HCMD.EQ. HG ) GO TO 2500		00001420
IF(HCMD.EQ.HHGG (1) ) GO TO 2510		00001430
IF(HCMD.EQ.HHGL (1) ) GO TO 2520		00001440
IF(HCMD.EQ.HHGT (1) ) GO TO 2530		00001450
IF(HCMD.EQ. HH ) GO TO 2600		00001460
IF(HCMD.EQ. HI ) GO TO 2700		00001470
IF(HCMD.EQ. HIP ) GO TO 2710		00001480
IF(HCMD.EQ. HIL ) GO TO 2720		00001490
IF(HCMD.EQ. HIR ) GO TO 2730		00001500
IF(HCMD.EQ. HL ) GO TO 2800		00001510
IF(HCMD.EQ. HLX ) GO TO 2810		00001520
IF(HCMD.EQ. HLY ) GO TO 2820		00001530
IF(HCMD.EQ. HM ) GO TO 4700		00001540
IF(HCMD.EQ. HO ) GO TO 3000		00001550
IF(HCMD.EQ. HOD ) GO TO 3010		00001560
IF(HCMD.EQ. HOW ) GO TO 3020		00001570
IF(HCMD.EQ. HOP ) GO TO 3030		00001580
IF(HCMD.EQ. HOE ) GO TO 3040		00001590
IF(HCMD.EQ. HOT ) GO TO 3050		00001600
IF(HCMD.EQ.HHP (1) ) GO TO 3100		00001610
IF(HCMD.EQ. HQ ) GO TO 3500		00001620
IF(HCMD.EQ.HHQE (1) ) GO TO 3810		00001630
IF(HCMD.EQ. HQN ) GO TO 3820		00001640
IF(HCMD.EQ.HHQM (1) ) GO TO 3900		00001650
IF(HCMD.EQ. HR ) GO TO 4100		00001660
IF(HCMD.EQ.HHRR (1) ) GO TO 4100		00001670
IF(HCMD.EQ. HS ) GO TO 4200		00001680
IF(HCMD.EQ. HSC ) GO TO 4210		00001690
IF(HCMD.EQ. HSL ) GO TO 4220		00001700
IF(HCMD.EQ. HSN ) GO TO 4230		00001710
IF(HCMD.EQ. HSX ) GO TO 4240		00001720
IF(HCMD.EQ. HSY ) GO TO 4250		00001730
IF(HCMD.EQ.HHTC (1) ) GO TO 4300		00001740
IF(HCMD.EQ.HHTE (1) ) GO TO 4400		00001750
IF(HCMD.EQ. HV ) GO TO 4500		00001760
IF(HCMD.EQ.HHVV (1) ) GO TO 4500		00001770
IF(HCMD.EQ. HXY ) GO TO 4600		00001780
IF(HCMD.EQ.HHXC (1) ) GO TO 4610		00001790
IF(HCMD.EQ.HHYC (1) ) GO TO 4620		00001800
IF(HCMD.EQ.HHZM (1) ) GO TO 4700		00001810
IF(HCMD.EQ.HH9C (1) ) GO TO 5100		00001820
IF(HCMD.EQ.HH9T (1) ) GO TO 5600		00001830
IF(HCMD.EQ. H9D ) GO TO 5200		00001840
IF(HCMD.EQ. H9DC ) GO TO 5210		00001850
IF(HCMD.EQ. H9DG ) GO TO 5220		00001860
IF(HCMD.EQ. H9DP ) GO TO 5250		00001870
IF(HCMD.EQ. H9DQ ) GO TO 5260		00001880
IF(HCMD.EQ. H9FF ) GO TO 5300		00001890
IF(HCMD.EQ. H9G ) GO TO 5400		00001900
IF(HCMD.EQ. H9I ) GO TO 5500		00001910
IF(HCMD.EQ. H9IC ) GO TO 5510		00001920
IF(HCMD.EQ. H9IG ) GO TO 5520		00001930
IF(HCMD.EQ. H9IP ) GO TO 5250		00001940

```

        IF(HCMD.EQ. H8IQ      ) GO TO 5560          00001950
        IF(HCMD.EQ. H9TG      ) GO TO 5620          00001960
        WRITE(LUP, 1801) HCMD                      00001970
1801 FORMAT(1X, A4, '?')                         00001980
        GO TO 1400                                 00001990
C      ====== COMMAND EXITS ====== 00002000
C      ====== INPUT AND MISC. ====== 00002010
C      ----- A ----- 00002020
2100 CONTINUE                                     00002030
2101 FORMAT(' 1 FOR X AND Y DISPERSIVITY (AX, AY),'
+     / ' 2 FOR X DISPERSIVITY AND DISPERSION RATIO (AX, DR):'
+     / '?' )                                00002040
        IF(BOP) WRITE(LUP, 2101)                  00002050
        CALL GETI(ICMD, 1, 2)                     00002060
        IF(BERR) GO TO 8110                      00002070
        IF(ICMD.EQ.1) CALL PUSH(HHAY(1) )          00002080
        IF(ICMD.EQ.2) CALL PUSH(HHDR(1) )          00002090
C      GO TO 2110                                 00002100
C      ----- AX ----- 00002110
2110 CALL GETR(HHAX, AX, .TRUE.)                 00002120
        IF(BERR) GO TO 8120                      00002130
        KDX = 2                                  00002140
        GO TO 1500                                 00002150
C      ----- AY ----- 00002160
2120 CALL GETR(HHAY, AY, .TRUE.)                 00002170
        IF(BERR) GO TO 8120                      00002180
        KDY = 2                                  00002190
        GO TO 1500                                 00002200
C      ----- C ----- 00002210
2200 CONTINUE                                     00002220
2201 FORMAT(' THREE TITLE LINES: / / ?')          00002230
2202 FORMAT(' ?')
        IF(BOP) WRITE(LUP, 2201)                  00002240
        READ (LUR, 1021) HHC1                   00002250
        IF(BOE) CALL PUTH(HHC1, LUE)             00002260
        IF(BOP) WRITE(LUP, 2202)                  00002270
        READ (LUR, 1021) HHC2                   00002280
        IF(BOE) CALL PUTH(HHC2, LUE)             00002290
        IF(BOP) WRITE(LUP, 2202)                  00002300
        READ (LUR, 1021) HHC3                   00002310
        IF(BOE) CALL PUTH(HHC3, LUE)             00002320
        GO TO 1500                                 00002330
C      ----- D = D OR A ----- 00002340
2300 CONTINUE                                     00002350
2301 FORMAT(' 1 FOR X AND Y DISPERSION (DX, DY),'
+     / ' 2 FOR X DISPERSION AND DISPERSION RATIO (DX, DR),'
+     / ' 3 FOR X AND Y DISPERSIVITY (AX, AY),'
+     / ' 4 FOR X DISPERSIVITY AND DISPERSION RATIO (AX, DR),'
+     / '(USE DM FOR MOLECULAR DIFFUSION):'
+     / '?' )                                00002360
        IF(BOP) WRITE(LUP, 2301)                  00002370
        CALL GETI(ICMD, 1, 4)                     00002380
        IF(BERR) GO TO 8110                      00002390
        IF(ICMD.EQ.1) CALL PUSH(HHDY(1) )          00002400
        IF(ICMD.EQ.2) CALL PUSH(HHDR(1) )          00002410
        IF(ICMD.EQ.3) CALL PUSH(HHAY(1) )          00002420
        IF(ICMD.EQ.4) CALL PUSH(HHDR(1) )          00002430
        GO TO (2310, 2310, 2110, 2110), ICMD    00002440
C      ----- DX ----- 00002450
2310 CALL GETR(HHDX, DX, .TRUE.)                 00002460
        IF(BERR) GO TO 8120                      00002470
        KDX = 1                                  00002480
        GO TO 1500                                 00002490
C      ----- DY ----- 00002500
2320 CALL GETR(HHDY, DY, .TRUE.)                 00002510
        IF(BERR) GO TO 8120                      00002520

```

```

        KDY = 1          00002610
        GO TO 1500      00002620
C      ----- DR ----- 00002630
2330  CALL GETR(HHDR, DR, .TRUE.) 00002640
      IF(BERR) GO TO 8120 00002650
      KDY = 3          00002660
      GO TO 1500      00002670
C      ----- DM ----- 00002680
2340  CALL GETR(HHDM, DM, .TRUE.) 00002690
      IF(BERR) GO TO 8120 00002700
      GO TO 1500      00002710
C      ----- E ----- 00002720
2400  CONTINUE      00002730
2401  FORMAT(' END OF PLUME PROGRAM.') 00002740
2402  FORMAT(' GOODBYE.')
      WRITE(LUE, 2401) 00002750
      WRITE(LUP, 2402) 00002760
      STOP            00002770
      00002780
C      ----- G ----- 00002790
2500  CONTINUE      00002800
2501  FORMAT(' O FOR NO DECAY,
      +   / ' 1 FOR DECAY COEFFICIENT, GAMMA (GG),'
      +   / ' 2 FOR DECAY LAMBDA (GL),
      +   / ' 3 FOR DECAY HALF-LIFE (GT);
      +   / ' ?')
      IF(BOP) WRITE(LUP, 2501) 00002820
      CALL GETI(ICMD, O, 3) 00002830
      IF(BERR) GO TO 8110 00002840
      ICMD = ICMD + 1 00002850
      GO TO (2505, 2510, 2520, 2530), ICMD 00002860
2505  G = 1.0        00002870
      KG = 1          00002880
      GO TO 1500      00002890
C      ----- GG ----- 00002900
2510  CALL GETR(HHGG, XC, .FALSE.) 00002910
      IF(XC.LT.1.0) GO TO 8120 00002920
      G = XC          00002930
      KG = 1          00002940
      GO TO 1500      00002950
C      ----- GL ----- 00002960
2520  CALL GETR(HHGL, XC, .FALSE.) 00002970
      IF(XC.LT.0.0) GO TO 8120 00002980
      GL = XC          00002990
      KG = 2          00003000
      GO TO 1500      00003010
C      ----- GT ----- 00003020
2530  CALL GETR(HHGT, GT, .TRUE.) 00003030
      IF(BERR) GO TO 8120 00003040
      GL = 1.0        00003050
      KG = 3          00003060
      GO TO 1500      00003070
C      ----- H ----- 00003080
2600  CONTINUE      00003090
2601  FORMAT(
      +   ' INPUT:           OUTPUT:'
      +   ' C CASE TITLE    .I INPUT PARAM.'
      +   ' M THICKNESS     .D ALL PARAM.'
      +   ' P POROSITY      .C SINGLE'
      +   ' V VELOCITY       .G GRID MAP'
      +   ' D DISPERSION    .FF PAGE PRINT'
      +   ' A DISPERSIVITY '
      +   ' R RETARDATION   SPECIAL:'
      +   ' G DECAY          H HELP'
      +   ' Q SOURCE         E EXIT'
      +   ' T SAMPLE TIME   I INPUT'
      +   ' TE STEADY STATE O OUTPUT'
      00003100
      00003110
      00003120
      00003130
      00003140
      00003150
      00003160
      00003170
      00003180
      00003190
      00003200
      00003210
      00003220
      00003230
      00003240
      00003250
      00003260

```

```

+/ ' XY SINGLE X,Y'          00003270
+/ ' L GRID LIMITS'         00003280
+/ ' S GRID SCALES')       00003290
      WRITE(LUP, 2601)        00003300
      GO TO 1500             00003310
C   ----- I -----
2700  CONTINUE                00003320
2701 FORMAT( /' 1 TO PROMPT FOR ALL REQUIRED PARAMETERS (IP),'
+     /' 2 TO LOAD PREVIOUSLY SAVED PARAMETERS (IL),'
+     /' 3 TO READ ALL INPUT FROM ANOTHER SOURCE (IR),'
+     /' -1 TO SET OUTPUT PARAMETERS (O):'
+     /' ?')
      IF(BOP) WRITE(LUP, 2701)
      CALL GETI(ICMD, -1, 3)
      IF(BERR) GO TO 8110
      IF(ICMD.EQ. 0) GO TO 8110
      IF(ICMD.EQ. 1) GO TO 2710
      IF(ICMD.EQ. 2) GO TO 2720
      IF(ICMD.EQ. 3) HCMD = HIR
      IF(ICMD.EQ.-1) HCMD = HO
      CALL PUSH(HI)
      GO TO 1700               00003380
C   ----- IP -----
C   (LAST COMMAND MUST RESET BIP) 00003490
2710  BIP = .TRUE.
      KLX = O                 00003510
      KLY = O                 00003520
      KXC = O                 00003530
      KYC = O                 00003540
      NQ  = O                 00003550
      CALL PUSH(HD)            00003560
      CALL PUSH(HG)            00003570
      CALL PUSH(HR)            00003580
      CALL PUSH(HHTC(1) )       00003590
      CALL PUSH(HQ)            00003600
      CALL PUSH(HL)            00003610
      CALL PUSH(HV)            00003620
      CALL PUSH(HHP (1) )       00003630
      CALL PUSH(HHZM(1) )       00003640
      HCMD = HC                00003650
      GO TO 1700               00003660
C   ----- IL -----
2720  CONTINUE                00003670
2721 FORMAT(' LOAD FILE UNIT (', I3, ' TO', I3, '):/' '/ ?')
      WRITE(LUP, 2721) LUL, LUM 00003680
      CALL GETI(LU, LUL, LUM)   00003690
      IF(BERR) GO TO 8120
      READ (LU) I, IX, IY, IQ
      IF(    I .NE. MHCOM
+     .OR. IX.NE.MKCOM
+     .OR. IY.NE.MRCOM
+     .OR. IQ.NE.MQ
+     ) GO TO 8120
      READ (LU) HHCOM
      READ (LU) KKCOM, KKQX, KKQM
      READ (LU) RRCOM
      READ (LU) QQXL, QQXM, QQYL, QQYM
      +     , QQA , QQT , QQV , QQ
      +     , QQC , QQR , QQM
      ENDFILE LU
      BIP = .FALSE.
      GO TO 1500               00003700
C   ----- IR -----
2730  CONTINUE                00003710
2731 FORMAT(' INPUT UNIT (1 TO', I3, '):/' '/ ?')
      IF(BOP) WRITE(LUP, 2731) LUM 00003720
      00003730
      00003740
      00003750
      00003760
      00003770
      00003780
      00003790
      00003800
      00003810
      00003820
      00003830
      00003840
      00003850
      00003860
      00003870
      00003880
      00003890
      00003900
      00003910
      00003920

```

```

IF(BOP) WRITE(LUP, 4211)          00007230
READ (LUR, 1023) XC              00007240
IF(BOE) WRITE(LUE, 1033) XC        00007250
IF(XC.LE.O.O) GO TO 8120          00007260
SC = 1.0/XC                      00007270
GO TO 1500                        00007280
C ----- SL -----
4220 CONTINUE                      00007290
4221 FORMAT(' GRID MAP LINE SIZE (40-255 CHARACTERS/LINE):'/' ?') 00007300
    IF(BOP) WRITE(LUP, 4221)          00007310
    CALL GETI(ICMD, 40, 255)          00007320
    IF(BERR) GO TO 8120              00007340
    NSL = ICMD                      00007350
    GO TO 1500                        00007360
C ----- SN -----
4230 CONTINUE                      00007370
4231 FORMAT(' GRID MAP NODES PER LINE (0 FOR FULL LINE):'/' ?') 00007380
    IF(BOP) WRITE(LUP, 4231)          00007390
    CALL GETI(NSN, 0, 0)              00007400
    GO TO 1500                        00007410
C ----- SX -----
4240 CONTINUE                      00007420
4241 FORMAT(' GRID MAP X SPACING (3 TO 6 CHARACTERS/NODE):'/' ?') 00007430
    IF(BOP) WRITE(LUP, 4241)          00007440
    CALL GETI(ICMD, 3, 6)              00007450
    IF(BERR) GO TO 8120              00007460
    NSX = ICMD                      00007470
    GO TO 1500                        00007480
C ----- SY -----
4250 CONTINUE                      00007490
4251 FORMAT(' GRID MAP Y SPACING (1 TO 4 LINES/NODE):'/' ?') 00007500
    IF(BOP) WRITE(LUP, 4251)          00007510
    CALL GETI(ICMD, 1, 4)              00007520
    IF(BERR) GO TO 8120              00007530
    NSY = ICMD                      00007540
    GO TO 1500                        00007550
C ----- T -----
4300 CONTINUE                      00007560
4301 FORMAT(' -1 FOR STEADY STATE.') 00007570
    IF(BOP) WRITE(LUP, 4301)          00007580
    CALL GETR(HHTC, TC, .FALSE.)      00007590
    BIP = .FALSE.                    00007600
    GO TO 1500                        00007610
C ===== TE =====
4400 CALL GETR(HHTC, XC, .TRUE.)      00007620
    IF(BERR) GO TO 8120              00007630
    IF(XC .GT. 100.) GO TO 8120      00007640
    KTE = 1                          00007650
    YC = XC/50.                      00007660
    PO = 0.                           00007670
    P2 = PO                           00007680
    IF(ERFC(PO) - YC) 4425, 4480, 4426 00007690
4425 PO = -1.                         00007700
    GO TO 4429                      00007710
4426 PO = 1.                          00007720
4429 CONTINUE                      00007730
    DO 4448 I = 1, NEXP             00007740
        IF((ERFC(PO) - YC)*PO) 4449, 4480, 4445 00007750
4445 P2 = PO                         00007760
    PO = PO * 2.                    00007770
4448 CONTINUE                      00007780
    GO TO 8120                      00007790
4449 P1 = AMIN1(PO,P2)              00007800
    P2 = AMAX1(PO,P2)              00007810
    DO 4468 I = 1, NACC             00007820
        PO = (P1 + P2)/2.0            00007830
    CONTINUE                      00007840
4468 GO TO 8120                      00007850
    P1 = AMIN1(PO,P2)              00007860
    P2 = AMAX1(PO,P2)              00007870
    DO 4469 I = 1, NACC             00007880
        PO = (P1 + P2)/2.0            00007890
    CONTINUE                      00007900
4469 GO TO 8120                      00007910
    P1 = AMIN1(PO,P2)              00007920
    P2 = AMAX1(PO,P2)              00007930
    DO 4470 I = 1, NACC             00007940
        PO = (P1 + P2)/2.0            00007950
    CONTINUE                      00007960
4470 GO TO 8120                      00007970
    P1 = AMIN1(PO,P2)              00007980
    P2 = AMAX1(PO,P2)              00007990
    DO 4471 I = 1, NACC             00008000
        PO = (P1 + P2)/2.0            00008010
    CONTINUE                      00008020
4471 GO TO 8120                      00008030
    P1 = AMIN1(PO,P2)              00008040
    P2 = AMAX1(PO,P2)              00008050
    DO 4472 I = 1, NACC             00008060
        PO = (P1 + P2)/2.0            00008070
    CONTINUE                      00008080
4472 GO TO 8120                      00008090
    P1 = AMIN1(PO,P2)              00008100
    P2 = AMAX1(PO,P2)              00008110
    DO 4473 I = 1, NACC             00008120
        PO = (P1 + P2)/2.0            00008130
    CONTINUE                      00008140
4473 GO TO 8120                      00008150
    P1 = AMIN1(PO,P2)              00008160
    P2 = AMAX1(PO,P2)              00008170
    DO 4474 I = 1, NACC             00008180
        PO = (P1 + P2)/2.0            00008190
    CONTINUE                      00008200
4474 GO TO 8120                      00008210
    P1 = AMIN1(PO,P2)              00008220
    P2 = AMAX1(PO,P2)              00008230
    DO 4475 I = 1, NACC             00008240
        PO = (P1 + P2)/2.0            00008250
    CONTINUE                      00008260
4475 GO TO 8120                      00008270
    P1 = AMIN1(PO,P2)              00008280
    P2 = AMAX1(PO,P2)              00008290
    DO 4476 I = 1, NACC             00008300
        PO = (P1 + P2)/2.0            00008310
    CONTINUE                      00008320
4476 GO TO 8120                      00008330
    P1 = AMIN1(PO,P2)              00008340
    P2 = AMAX1(PO,P2)              00008350
    DO 4477 I = 1, NACC             00008360
        PO = (P1 + P2)/2.0            00008370
    CONTINUE                      00008380
4477 GO TO 8120                      00008390
    P1 = AMIN1(PO,P2)              00008400
    P2 = AMAX1(PO,P2)              00008410
    DO 4478 I = 1, NACC             00008420
        PO = (P1 + P2)/2.0            00008430
    CONTINUE                      00008440
4478 GO TO 8120                      00008450
    P1 = AMIN1(PO,P2)              00008460
    P2 = AMAX1(PO,P2)              00008470
    DO 4479 I = 1, NACC             00008480
        PO = (P1 + P2)/2.0            00008490
    CONTINUE                      00008500
4479 GO TO 8120                      00008510
    P1 = AMIN1(PO,P2)              00008520
    P2 = AMAX1(PO,P2)              00008530
    DO 4480 I = 1, NACC             00008540
        PO = (P1 + P2)/2.0            00008550
    CONTINUE                      00008560
4480 GO TO 8120                      00008570
    P1 = AMIN1(PO,P2)              00008580
    P2 = AMAX1(PO,P2)              00008590
    DO 4481 I = 1, NACC             00008600
        PO = (P1 + P2)/2.0            00008610
    CONTINUE                      00008620
4481 GO TO 8120                      00008630
    P1 = AMIN1(PO,P2)              00008640
    P2 = AMAX1(PO,P2)              00008650
    DO 4482 I = 1, NACC             00008660
        PO = (P1 + P2)/2.0            00008670
    CONTINUE                      00008680
4482 GO TO 8120                      00008690
    P1 = AMIN1(PO,P2)              00008700
    P2 = AMAX1(PO,P2)              00008710
    DO 4483 I = 1, NACC             00008720
        PO = (P1 + P2)/2.0            00008730
    CONTINUE                      00008740
4483 GO TO 8120                      00008750
    P1 = AMIN1(PO,P2)              00008760
    P2 = AMAX1(PO,P2)              00008770
    DO 4484 I = 1, NACC             00008780
        PO = (P1 + P2)/2.0            00008790
    CONTINUE                      00008800
4484 GO TO 8120                      00008810
    P1 = AMIN1(PO,P2)              00008820
    P2 = AMAX1(PO,P2)              00008830
    DO 4485 I = 1, NACC             00008840
        PO = (P1 + P2)/2.0            00008850
    CONTINUE                      00008860
4485 GO TO 8120                      00008870
    P1 = AMIN1(PO,P2)              00008880
    P2 = AMAX1(PO,P2)              00008890
    DO 4486 I = 1, NACC             00008900
        PO = (P1 + P2)/2.0            00008910
    CONTINUE                      00008920
4486 GO TO 8120                      00008930
    P1 = AMIN1(PO,P2)              00008940
    P2 = AMAX1(PO,P2)              00008950
    DO 4487 I = 1, NACC             00008960
        PO = (P1 + P2)/2.0            00008970
    CONTINUE                      00008980
4487 GO TO 8120                      00008990
    P1 = AMIN1(PO,P2)              00009000
    P2 = AMAX1(PO,P2)              00009010
    DO 4488 I = 1, NACC             00009020
        PO = (P1 + P2)/2.0            00009030
    CONTINUE                      00009040
4488 GO TO 8120                      00009050
    P1 = AMIN1(PO,P2)              00009060
    P2 = AMAX1(PO,P2)              00009070
    DO 4489 I = 1, NACC             00009080
        PO = (P1 + P2)/2.0            00009090
    CONTINUE                      00009100
4489 GO TO 8120                      00009110
    P1 = AMIN1(PO,P2)              00009120
    P2 = AMAX1(PO,P2)              00009130
    DO 4490 I = 1, NACC             00009140
        PO = (P1 + P2)/2.0            00009150
    CONTINUE                      00009160
4490 GO TO 8120                      00009170
    P1 = AMIN1(PO,P2)              00009180
    P2 = AMAX1(PO,P2)              00009190
    DO 4491 I = 1, NACC             00009200
        PO = (P1 + P2)/2.0            00009210
    CONTINUE                      00009220
4491 GO TO 8120                      00009230
    P1 = AMIN1(PO,P2)              00009240
    P2 = AMAX1(PO,P2)              00009250
    DO 4492 I = 1, NACC             00009260
        PO = (P1 + P2)/2.0            00009270
    CONTINUE                      00009280
4492 GO TO 8120                      00009290
    P1 = AMIN1(PO,P2)              00009300
    P2 = AMAX1(PO,P2)              00009310
    DO 4493 I = 1, NACC             00009320
        PO = (P1 + P2)/2.0            00009330
    CONTINUE                      00009340
4493 GO TO 8120                      00009350
    P1 = AMIN1(PO,P2)              00009360
    P2 = AMAX1(PO,P2)              00009370
    DO 4494 I = 1, NACC             00009380
        PO = (P1 + P2)/2.0            00009390
    CONTINUE                      00009400
4494 GO TO 8120                      00009410
    P1 = AMIN1(PO,P2)              00009420
    P2 = AMAX1(PO,P2)              00009430
    DO 4495 I = 1, NACC             00009440
        PO = (P1 + P2)/2.0            00009450
    CONTINUE                      00009460
4495 GO TO 8120                      00009470
    P1 = AMIN1(PO,P2)              00009480
    P2 = AMAX1(PO,P2)              00009490
    DO 4496 I = 1, NACC             00009500
        PO = (P1 + P2)/2.0            00009510
    CONTINUE                      00009520
4496 GO TO 8120                      00009530
    P1 = AMIN1(PO,P2)              00009540
    P2 = AMAX1(PO,P2)              00009550
    DO 4497 I = 1, NACC             00009560
        PO = (P1 + P2)/2.0            00009570
    CONTINUE                      00009580
4497 GO TO 8120                      00009590
    P1 = AMIN1(PO,P2)              00009600
    P2 = AMAX1(PO,P2)              00009610
    DO 4498 I = 1, NACC             00009620
        PO = (P1 + P2)/2.0            00009630
    CONTINUE                      00009640
4498 GO TO 8120                      00009650
    P1 = AMIN1(PO,P2)              00009660
    P2 = AMAX1(PO,P2)              00009670
    DO 4499 I = 1, NACC             00009680
        PO = (P1 + P2)/2.0            00009690
    CONTINUE                      00009700
4499 GO TO 8120                      00009710
    P1 = AMIN1(PO,P2)              00009720
    P2 = AMAX1(PO,P2)              00009730
    DO 4500 I = 1, NACC             00009740
        PO = (P1 + P2)/2.0            00009750
    CONTINUE                      00009760
4500 GO TO 8120                      00009770
    P1 = AMIN1(PO,P2)              00009780
    P2 = AMAX1(PO,P2)              00009790
    DO 4501 I = 1, NACC             00009800
        PO = (P1 + P2)/2.0            00009810
    CONTINUE                      00009820
4501 GO TO 8120                      00009830
    P1 = AMIN1(PO,P2)              00009840
    P2 = AMAX1(PO,P2)              00009850
    DO 4502 I = 1, NACC             00009860
        PO = (P1 + P2)/2.0            00009870
    CONTINUE                      00009880
4502 GO TO 8120                      00009890
    P1 = AMIN1(PO,P2)              00009900
    P2 = AMAX1(PO,P2)              00009910
    DO 4503 I = 1, NACC             00009920
        PO = (P1 + P2)/2.0            00009930
    CONTINUE                      00009940
4503 GO TO 8120                      00009950
    P1 = AMIN1(PO,P2)              00009960
    P2 = AMAX1(PO,P2)              00009970
    DO 4504 I = 1, NACC             00009980
        PO = (P1 + P2)/2.0            00009990
    CONTINUE                      00009999
4504 GO TO 8120                      00010000

```

```

CALL GETI(LU, 1, LUM) 00003930
IF(BERR) GO TO 8120 00003940
LUR = LU 00003950
GO TO 1500 00003960
C ----- L -----
2800 CALL PUSH(HLY ) 00003980
C GO TO 2810 00003990
C ----- LX -----
2810 CONTINUE 00004000
2811 FORMAT(' GRID MAP X LOCATIONS (',2A4,',' 00004010
+ / ' MINIMUM, (MAXIMUM), (INTERVAL):' 00004020
+ / '?' 00004030
IF(BOP) WRITE(LUP, 2811) HHXC(6), HHXC(7) 00004040
READ (LUR, *) XGL, XGM, XGI 00004050
IF(BOE) WRITE(LUE, 1033) XGL, XGM, XGI 00004060
KLX = 0 00004070
IF(XGM.LE.XGL .AND. XGI.LE.0.0) GO TO 8120 00004080
KLX = 1 00004090
GO TO 1500 00004100
C ----- LY -----
2820 CONTINUE 00004110
2821 FORMAT(' GRID MAP Y LOCATIONS (',2A4,',' 00004120
+ / ' MINIMUM, MAXIMUM, (INTERVAL):' 00004130
+ / '?' 00004140
IF(BOP) WRITE(LUP, 2821) HHYC(6), HHYC(7) 00004150
READ (LUR, *) YGL, YGM, YGI 00004160
IF(BOE) WRITE(LUE, 1033) YGL, YGM, YGI 00004170
KLY = 1 00004180
GO TO 1500 00004190
C ----- O -----
3000 CONTINUE 00004200
3001 FORMAT(' 1 TO DUMP ALL PARAMETERS TO DISK (OD),' 00004210
+ / ' 2 TO SET LOCATION FOR WRITING RESULTS (OW),' 00004220
+ / ' 3 TO SET PROMPTING (OP),' 00004230
+ / ' 4 TO SET ECHO (OE),' 00004240
+ / ' 5 TO SET TRACE (OT),' 00004250
+ / '?' 00004260
IF(BOP) WRITE(LUP, 3001) 00004270
CALL GETI(ICMD, 1, 5) 00004280
IF(BERR) GO TO 8110 00004290
GO TO (3010, 3020, 3030, 3040, 3050), ICMD 00004300
C ----- OD -----
3010 CONTINUE 00004310
IF(BIP) GO TO 8110 00004320
3011 FORMAT(' DUMP FILE UNIT (', I3, ' TO', I3, '):' / '?' ) 00004330
WRITE(LUP, 3011) LUL, LUM 00004340
CALL GETI(LU, LUL, LUM) 00004350
IF(BERR) GO TO 8120 00004360
WRITE(LU) MHC0M, MKCOM, MR0M, MQ 00004370
WRITE(LU) HHC0M 00004380
WRITE(LU) KK0M, KKQX, KKQM 00004390
WRITE(LU) RRC0M 00004400
WRITE(LU) QQXL, QQXM, QQYL, QQYM 00004410
+ . QQA , QQT , QQV , QQ 00004420
+ . QQC , QQR , QQM 00004430
ENDFILE LU 00004440
CLOSE(LU) 00004450
GO TO 1500 00004460
C ----- OW -----
3020 CONTINUE 00004470
3021 FORMAT(' 1 TO' I3, ' TO SET RESULTS UNIT:' / '?' ) 00004480
IF(BOP) WRITE(LUP, 3021) LUM 00004490
CALL GETI(LU, 1, LUM) 00004500
IF(BERR) GO TO 8120 00004510
LUW = LU 00004520
GO TO 1500 00004530

```

```

C ----- OP ----- 00004590
3030 CONTINUE
3031 FORMAT(' -1 FOR NO PROMPTING,' 00004600
+ / ' 0 FOR PROMPTING,' 00004610
+ / ' 1 TO' I3, ' TO SET PROMPTING UNIT:' / ' ?') 00004620
IF(BOP) WRITE(LUP, 3031) LUM 00004630
CALL GETI(LU, -1, LUM) 00004640
IF(BERR) GO TO 8120 00004650
BOP = LU.GE.0 00004660
IF(LU.GT.0) LUP = LU 00004670
GO TO 1500 00004680
00004690
C ----- DE ----- 00004700
3040 CONTINUE 00004710
3041 FORMAT(' -1 FOR NO ECHO,' 00004720
+ / ' 0 FOR ECHO,' 00004730
+ / ' 1 TO' I3, ' TO SET ECHO UNIT:' / ' ?') 00004740
IF(BOP) WRITE(LUP, 3041) LUM 00004750
CALL GETI(LU, -1, LUM) 00004760
IF(BERR) GO TO 8120 00004770
BOE = LU.GE.0 00004780
IF(LU.GT.0) LUE = LU 00004790
GO TO 1500 00004800
00004810
C ----- OT ----- 00004820
3050 CONTINUE 00004830
3051 FORMAT(' + FOR TRACE, - FOR NO TRACE;' 00004840
+ / ' 1 FOR COMMAND TRACE,' 00004850
+ / ' 2 FOR STACK TRACE,' 00004860
+ / ' 5 FOR CALCULATION TRACE:' / ' ?') 00004870
IF(BOP) WRITE(LUP, 3051) 00004880
CALL GETI(ICMD, -MBT, MBT) 00004890
IF(BERR) GO TO 8120 00004900
LU = IABS(ICMD) 00004910
IF(LU.NE. 0) BBT(LU) = ICMD.GT.0 00004920
GO TO 1500
00004930
C ----- P ----- 00004940
3100 CALL GETR(HHP, XC, .TRUE.) 00004950
IF(BERR) GO TO 8120 00004960
IF(XC.GT.1.) GO TO 8120 00004970
P = XC 00004980
GO TO 1500
00004990
C ----- Q ----- 00005000
3500 CONTINUE
3511 FORMAT(' CURRENTLY USING', I4, ' OF', I4, ' TIME STEPS.' 00005010
+ / ' 0 TO END SOURCE INFORMATION,' 00005020
+ / ' 1 TO ADD POINT SOURCE,' 00005030
+ / ' 2 TO ADD NON-POINT SOURCE,' 00005040
+ / ' -N TO DELETE LAST N TIME STEPS:' 00005050
+ / ' ?') 00005060
3512 FORMAT(' **** BEGIN SOURCE INFORMATION ****')
3513 FORMAT(' **** END SOURCE INFORMATION ****')
3514 WRITE(LUP, 3512)
3510 IF(BOP) WRITE(LUP, 3511) NQ, MQ 00005100
CALL GETI(ICMD, 0, 0) 00005110
IF(ICMD.LT.0) GO TO 3520 00005120
IF(ICMD.EQ.1) GO TO 3530 00005130
IF(ICMD.EQ.2) GO TO 3540 00005140
IF(NQ.LE.0) GO TO 3790 00005150
IF(ICMD.EQ.0) GO TO 3515 00005160
GO TO 3790 00005170
3515 WRITE(LUP, 3513) 00005180
GO TO 1500 00005190
00005200
C ----- REDUCE ----- 00005210
3520 NQ = MAXO(NQ + ICMD, 0) 00005220
GO TO 3510
00005230
C ----- POINT ----- 00005240
3530 IF(NQ.GE.MQ) GO TO 3799

```

```

3531 FORMAT(' X LOCATION, Y LOCATION (', 2A4, '):' / ' ?')
      IF(BOP) WRITE(LUP, 3531) HHQL(6), HHQL(7)
      READ (LUR, *) QXL, QYL
      IF(BOE) WRITE(LUE, 1033) QXL, QYL
      CALL GETR(HHQA, QA, .FALSE.)
C     IF(QA.LT.0.) GO TO 3790
      KQX = 1
      QXM = QXL
      QYM = QYL
      GO TO 3600
C     ----- NON-POINT -----
3540  IF(NQ.GE.MQ) GO TO 3799
3541 FORMAT(' X LOCATION MINIMUM, MAXIMUM (', 2A4, '):' / ' ?')
      IF(BOP) WRITE(LUP, 3541) HHQL(6), HHQL(7)
      READ (LUR, *) QXL, QXM
      IF(BOE) WRITE(LUE, 1033) QXL, QXM
      IF(QXM.LE.QXL) GO TO 3790
3542 FORMAT(' Y LOCATION MINIMUM, MAXIMUM (', 2A4, '):' / ' ?')
      IF(BOP) WRITE(LUP, 3542) HHQL(6), HHQL(7)
      READ (LUR, *) QYL, QYM
      IF(BOE) WRITE(LUE, 1033) QYM, QYM
      IF(QYM.LE.QYL) GO TO 3790
      KQX = 2
      QA = (QXM - QXL)*(QYM - QYL)*UQL*UQL/UQA
C     ----- TIME AND RATE -----
3600  CONTINUE
3601 FORMAT(' 1 FOR MASS FLOW RATE      (', 2A4, ','
+      / ' 2 FOR MASS/AREA RATE    (', 2A4, ','
+      / ' 3 FOR VOLUME FLOW RATE  (', 2A4, ','
+      / ' AND CONCENTRATION (', 2A4, ','
+      / ' 4 FOR VOLUME/AREA RATE  (', 2A4, ','
+      / ' AND CONCENTRATION (', 2A4, ','
+      / ' ?')
      IF(BOP) WRITE(LUP, 3601)
+      HHQM(6), HHQM(7), HHQR(6), HHQR(7)
+      , HHQQ(6), HHQQ(7), HHQC(6), HHQC(7)
+      , HHQV(6), HHQV(7), HHQC(6), HHQC(7)
      CALL GETI(KQM, 1, 4)
      IF(BERR) GO TO 3790
      QTO = -1E20
      QAU = QA*UQA
      QV = O.O
      Q = O.O
      QC = O.O
      QR = O.O
3700  CONTINUE
      GO TO (3710, 3720, 3730, 3740), KQM
3710  CONTINUE
3711 FORMAT(' TIME, MASS FLOW RATE, (CONCENTRATION):' / ' ?')
      IF(BOP) WRITE(LUP, 3711)
      READ (LUR, *) QT, QM, QC
      IF(BOE) WRITE(LUE, 1033) QT, QM, QC
      Q = O.
      IF(QC.GT.O.O) Q = QM*UQM/(QC*UQC)
      IF(QA.LE.O.O) GO TO 3715
      QR = QM*UQM/(QAU *UQR)
      QV = Q / (QAU *UQV)
3715  Q = Q / UQQ
      GO TO 3760
3720  CONTINUE
      IF(QA.LE.O.O) GO TO 3790
3721 FORMAT(' TIME, MASS/AREA RATE, (CONCENTRATION):' / ' ?')
      IF(BOP) WRITE(LUP, 3721)
      READ (LUR, *) QT, QR, QC
      IF(BOE) WRITE(LUE, 1033) QT, QR, QC
      QM = QR*UQR*QAU

```

```

IF(QC.LE.0.0) GO TO 3725          00005910
Q = QM /(QC*UQC*UQQ)            00005920
QV = Q *UQQ/(QUA *UQV)          00005930
GO TO 3750                      00005940
3725   Q = 0.                     00005950
      QV = 0.                     00005960
      GO TO 3750                 00005970
3730   CONTINUE                  00005980
3731 FORMAT(' TIME, VOLUME FLOW RATE, CONCENTRATION:' / ' ?')
      IF(BOP) WRITE(LUP, 3731)
      READ (LUR, *) QT, Q, QC
      IF(BOE) WRITE(LUE, 1033) QT, Q, QC
      QM = Q *UQQ*QC*UQC
      IF(QA.LE.0.0) GO TO 3750
      QR = QM /(QUA *UQR)
      QV = Q *UQQ/(QUA *UQV)
      GO TO 3750
3740   CONTINUE                  00006080
      IF(QA.LE.0.0) GO TO 3790
3741 FORMAT(' TIME, VOLUME/AREA RATE, CONCENTRATION:' / ' ?')
      IF(BOP) WRITE(LUP, 3741)
      READ (LUR, *) QT, QV, QC
      IF(BOE) WRITE(LUE, 1033) QT, QV, QC
      Q = QV*UQV*QUA /UQQ
      QR = QV*UQV*QC*UQC
      QM = QR *QUA
      QR = QR/UQR
3750   CONTINUE                  00006180
      QM = QM/UQM
3760   CONTINUE                  00006200
      IF(QT.LE.QTO) GO TO 3510
      IF(QM.LT.0.) GO TO 3790
C     IF(QC.LT.0.) GO TO 3790
      IF(NQ.GE.MQ) GO TO 3790
      NQ = NQ + 1
      KKQX(NQ) = KQX
      KKQM(NQ) = KQM
      QQXL(NQ) = QXL
      QQXM(NQ) = QXM
      QQYL(NQ) = QYL
      QQYM(NQ) = QYM
      QQT (NQ) = QT
      QQA (NQ) = QA
      QQV (NQ) = QV
      QQ (NQ) = Q
      QQC (NQ) = QC
      QQR (NQ) = QR
      QQM (NQ) = QM
      QTO = QT
      KQX = ISIGN(KQX, -1)
      ICMD = MIN1(QTO, 0.0)
3771 FORMAT(1X,'ENTER', 15, ' TO RETURN TO MAIN SOURCE MENU: ')
      IF(BOP) WRITE(LUP, 3771) ICMD
      GO TO 3700
C     ----- ERRORS -----
3790   WRITE(LUP, 1081)             00006450
3799   IF(BATCH) GO TO 1400         00006460
      GO TO 3510                   00006470
C     ===== QE ====== 00006480
3810   CALL GETR(HHQE, QE, .TRUE.)
      IF(BERR) GO TO 8120          00006490
      GO TO 1500                   00006500
C     ----- QN -----
3820   CONTINUE                  00006510
3821 FORMAT(' MAXIMUM NUMBER OF SUBAREAS PER SOURCE:'
      + / ' ?')                  00006520
                                00006530
                                00006540
                                00006550
                                00006560

```

```

        IF(ERFC(PO) - YC) 4465, 4480, 4466          00007890
4465      P2 = PO                                00007900
          GO TO 4467
4466      P1 = PO                                00007910
4467      CONTINUE
4468      CONTINUE
          PO = (P1 + P2)/2.0                      00007920
4480      CONTINUE
          TE = XC                                00007930
          TPHI = PO                                00007940
          GO TO 1500                               00007950
C      ====== V ====== 00008000
4500      CALL GETR(HHVV, V , .TRUE.)            00008010
          IF(BERR) GO TO 8120
          GO TO 1500                               00008020
C      ----- XY ----- 00008030
4600      CALL PUSH(HHYC(1))                  00008040
          HCMD = HHXC(1)
          GO TO 1700                               00008050
C      ----- X ----- 00008060
4610      CONTINUE
          CALL GETR(HHXC, X9C, .FALSE.)
          KXC = 1
          GO TO 1500                               00008070
C      ----- Y ----- 00008080
4620      CONTINUE
          CALL GETR(HHYC, Y9C, .FALSE.)
          KYC = 1
          GO TO 1500                               00008090
C      ----- ZM ----- 00008100
4700      CALL GETR(HHZM, ZM, .TRUE.)            00008110
          IF(BERR) GO TO 8120
          GO TO 1500                               00008120
C      ====== OUTPUT COMMANDS ====== 00008130
5001      FORMAT(' SAMPLE TIME      = STEADY STATE') 00008140
C      ----- .C ----- 00008150
5100      CONTINUE
5101      FORMAT(18X, ' +-', G9.3, 1X, 2A4)       00008160
5102      FORMAT(' SAMPLE LOCATION WITHIN SOURCE.')
          IF(KXC.NE.0 .AND. KYC.NE.0) GO TO 5110
          IF(BATCH) GO TO 8120
          CALL PUSH(HH9C(1))
          IF(KYC.EQ.0) CALL PUSH(HHYC(1))
          IF(KXC.EQ.0) CALL PUSH(HHXC(1))
          GO TO 1500                               00008170
5110      CONTINUE
          CALL SETUP
          XC = X9C
          YC = Y9C
          B = TC.GE.0.0
          IF(B) CALL PUTR(HHTC, TC)
          IF(.NOT.B) WRITE(LUW, 5001)
          CALL PUTR(HHXC, XC)
          CALL PUTR(HHYC, YC)
          CALL CALC
          IF(.NOT.BERR) CALL PUTR(HH9C, C )
          IF(CE.GT.0.0) WRITE(LUW, 5101) CE , HH9C(6), HH9C(7)
          IF(BERR      ) WRITE(LUW, 5102)
          WRITE(LUW, 1001)
          GO TO 1500                               00008180
C      ----- .D ----- 00008190
5200      CALL PUSH(H9DQ)
          HCMD = H9DP
          GO TO 1700                               00008200
C      ----- .DC ----- 00008210
5210      CALL PUSH(HH9C(1))                     00008220
          00008230
          00008240
          00008250
          00008260
          00008270
          00008280
          00008290
          00008300
          00008310
          00008320
          00008330
          00008340
          00008350
          00008360
          00008370
          00008380
          00008390
          00008400
          00008410
          00008420
          00008430
          00008440
          00008450
          00008460
          00008470
          00008480
          00008490
          00008500
          00008510
          00008520
          00008530
          00008540

```

```

IF(BOP) WRITE(LUP, 3821)          00006570
CALL GETI(ICMD, 0, 0)            00006580
IF(ICMD.LE.0) GO TO 8120        00006590
NQN = ICMD                      00006600
GO TO 1500                      00006610
C      ====== QM ====== 00006620
3900  CONTINUE                  00006630
C3901 FORMAT(                 00006640
C   + ' X       Y       START      MASS      '
C   +' LINE LOCATION LOCATION TIME     FLOW RATE'
C   +' 6X, 4(' (' , 2A4, ') ') ) 00006650
C3902 FORMAT(1X, I4, 1X, 4G13.6) 00006660
C   LU = LUW                      00006670
C   IF(.NOT. BOP) GO TO 3920     00006680
C   LU = LUP                      00006690
C3910  WRITE(LU, 3901) HHQL(6), HHQL(7), HHQL(6), HHQL(7) 00006700
C   + , HHQT(6), HHQT(7), HHQM(6), HHQM(7) 00006730
C   DO 3919 IQ = 1, NQ            00006740
C   WRITE(LU, 3902) IQ, QQXL(IQ), QQYL(IQ), QQT(IQ), QQM(IQ) 00006750
C3919  CONTINUE                  00006760
3920  CONTINUE                  00006770
3921 FORMAT(' -1 TO LIST FLOW RATES,' 00006780
+   /' O TO END QM,'           00006790
+   /' TIME STEP (LINE) NUMBER TO CHANGE FLOW RATE:' 00006800
+   /' ?')                     00006810
    IF(BOP) WRITE(LUP, 3921)
    CALL GETI(ICMD, -1, NQ)
    IF(BERR) GO TO 3990
C   IF(ICMD) 3910, 1500, 3950 00006850
    IF(ICMD) 3930, 1500, 3950 00006860
3930  CALL PUSH(HCMD)          00006870
    HCMD = H9IQ
    GO TO 1700
3950  CALL GETR(HHQM, QM, .FALSE.) 00006900
    IF(QM.LT.0.) GO TO 3990
    KKQM(ICMD) = 1              00006910
    QQM (ICMD) = QM             00006920
    QQR (ICMD) = 0.              00006930
    QQ (ICMD) = 0.              00006940
    QQV (ICMD) = 0.             00006950
    GO TO 3920
C   ----- ERRORS ----- 00006980
3990  WRITE(LUP, 1081)          00006990
    IF(BATCH) GO TO 1400
    GO TO 3920
C   ----- R ----- 00007020
4100  CALL GETR(HHRR, XC, .FALSE.) 00007030
    IF(XC.LT.1.0) GO TO 8120
    R = XC
    GO TO 1500
C   ----- R ----- 00007060
4200  CONTINUE                  00007080
4201 FORMAT(' GRID MAP SCALE PARAMETERS:' 00007090
+   /' 1 TO SET CONCENTRATION/STEADY STATE SCALE (SC),' 00007100
+   /' 2 TO SET LINE SIZE (SL),' 00007110
+   /' 3 TO SET NODES PER LINE (SN),' 00007120
+   /' 4 TO SET X SPACING (SX),' 00007130
+   /' 5 TO SET Y SPACING (SY):' 00007140
+   /' ?')                     00007150
    IF(BOP) WRITE(LUP, 4201)
    CALL GETI(ICMD, 1, 5)
    IF(BERR) GO TO 8110
    GO TO (4210, 4220, 4230, 4240, 4250), ICMD
C   ----- SC ----- 00007200
4210  CONTINUE                  00007210
4211 FORMAT(' GRID MAP MULTIPLIER:/' ?') 00007220

```

	HCMD = H9D	00008550
	GO TO 1700	00008560
C	----- .DG -----	00008570
5220	CALL PUSH(H9G)	00008580
	HCMD = H9D	00008590
	GO TO 1700	00008600
C	----- .DP, .IP -----	00008610
5250	CONTINUE	00008620
5251	FORMAT(' MAXIMUM DIVISION= ', I9)	00008630
	B = HCMD.EQ.H9DP	00008640
	IF(B) CALL SETUP	00008650
	CALL PUTH(HHC1, LUW)	00008660
	CALL PUTH(HHC2, LUW)	00008670
	CALL PUTH(HHC3, LUW)	00008680
	WRITE(LUW, 1001)	00008690
	CALL PUTR(HHZM, ZM)	00008700
	CALL PUTR(HMP, P )	00008710
	CALL PUTR(HHVV, V )	00008720
	WRITE(LUW, 1001)	00008730
	IF(B.OR. KDX.EQ.1 ) CALL PUTR(HHDX, DX)	00008740
	IF(B.OR. KDY.EQ.1 ) CALL PUTR(HDY, DY)	00008750
	IF(B.OR. KDX.EQ.2 ) CALL PUTR(HHAX, AX)	00008760
	IF(B.OR. KDY.EQ.2 ) CALL PUTR(HHAY, AY)	00008770
	IF(B.OR. KDY.EQ.3 ) CALL PUTR(HHDR, DR)	00008780
	IF(B.OR. DM.GT.0.0) CALL PUTR(HHDM, DM)	00008790
	WRITE(LUW, 1001)	00008800
	CALL PUTR(HHRR, R )	00008810
	IF(B.OR. KG.EQ.1 ) CALL PUTR(HHGG, G )	00008820
	IF(B.OR. KG.EQ.2 ) CALL PUTR(HHGL, GL)	00008830
	IF( (B.OR. KG.EQ.3) .AND. GL.GT.0.0) CALL PUTR(HHGT, GT)	00008840
	WRITE(LUW, 1001)	00008850
	IF(B) CALL PUTR(HHQE, QE)	00008860
	IF(B) WRITE(LUW, 5251) NQN	00008870
	GO TO 1500	00008880
C	----- .DQ -----	00008890
5260	CONTINUE	00008900
5261	FORMAT(	00008910
	+ / ' X, Y LOCATION =', G13.6, ' , ' , G13.6, 1X, 2A4)	00008920
5262	FORMAT(	00008930
	+ / ' X LOCATION =', G13.6, ' TO ', G13.6, 1X, 2A4	00008940
	+ / ' Y LOCATION =', G13.6, ' TO ', G13.6, 1X, 2A4 )	00008950
5265	FORMAT(	00008960
	+ ' START VOLUME/ VOLUME '	00008970
	+ , ' SOURCE MASS/AREA MASS FLOW '	00008980
	+/' TIME AREA RATE FLOW RATE '	00008990
	+ , ' CONCENTR. RATE RATE '	00009000
	+/1X, 6(' (', 2A4, ') ') )	00009010
5266	FORMAT(1X, 6G13.6)	00009020
	DO 5289 IQ = 1, NQ	00009030
	IF(KKQX(IQ)-1) 5280, 5271, 5272	00009040
5271	WRITE(LUW, 5261) QQXL(IQ), QQYL(IQ), HHQL(6), HHQL(7)	00009050
	GO TO 5275	00009060
5272	WRITE(LUW, 5262) QQXL(IQ), QQXM(IQ), HHQL(6), HHQL(7)	00009070
	+ , QQYL(IQ), QQYM(IQ), HHQL(6), HHQL(7)	00009080
5275	CALL PUTR(HHQA, QQA(IQ) )	00009090
	WRITE(LUW, 5265)	00009100
	+ HHQT(6), HHQT(7), HHQV(6), HHQV(7), HHQQ(6), HHQQ(7)	00009110
	+ , HHQC(6), HHQC(7), HHQR(6), HHQR(7), HHQM(6), HHQM(7)	00009120
5280	CONTINUE	00009130
	WRITE(LUW, 5266) QQT (IQ), QQV (IQ), QQ (IQ)	00009140
	+ , QQC (IQ), QQR (IQ), QQM (IQ)	00009150
5289	CONTINUE	00009160
	WRITE(LUW, 1001)	00009170
	GO TO 1500	00009180
C	----- .FF-----	00009190
5300	CONTINUE	00009200

```

5301 FORMAT('1')
      WRITE(LUW, 5301)
      GO TO 1500
C      ======.G=====
5400  CONTINUE
      IF(KLX.NE.0 .AND. KLY.NE.0) GO TO 5410
      IF(BATCH) GO TO 8120
      CALL PUSH(H9G)
      IF(KLY.EQ.0) CALL PUSH(HLY)
      IF(KLX.EQ.0) CALL PUSH(HLX)
      GO TO 1500
5410  CONTINUE
      CALL SETUP
C
      NXL = MINO( (NSL - 5)/NSX, MJ)          00009210
      NX = NSN                                00009220
      IF(NX.LE.0) NX = NXL                      00009230
      XI = XGI                                00009240
      IF(XGM.LE.XGL) GO TO 5425                00009250
          IF(XI.GT.0.) NX = (XGM - XGL)/XI + 1.0 00009260
          IF(XI.LE.0.) XI = (XGM - XGL)/(NX - 1) 00009270
5425  CONTINUE                                00009280
      K = ALOG10(AMAX1(ABS(XGL), ABS(XGL + XI*FLOAT(NX)) )) 00009290
      I = 0                                     00009300
      IF(K.GT.NSX-2) I = K - (NSX - 2)          00009310
      IF(K.LT.1) I = K - 3                      00009320
      XS = 10.0**I                             00009330
C
      YI = YGI                                00009340
      IF(YI.LE.0.0) YI = XI                      00009350
      NY = MAX1( (YGM - YGL)/YI, 0.0) + 1        00009360
      K = ALOG10(AMAX1(ABS(YGL), ABS(YGL + YI*FLOAT(NY)) )) 00009370
      I = 0                                     00009380
      IF(K.GT.3) I = K - 3                      00009390
      IF(K.LT.1) I = K - 3                      00009400
      YS = 10.0**I                             00009410
C
      CM = 10.0**(NSX - 1)                      00009420
      XL = XGL                                00009430
5440  NX1 = MINO(NX, NXL)                    00009440
      XC = XL                                 00009450
      DO 5449 IX = 1, NX1                      00009460
          JJ(IX) = XC/XS                      00009470
          XC = XC + XI                      00009480
5449  CONTINUE                                00009490
5451  FORMAT(' X SCALE          (', G13.6, 1X, 2A4, ')'
      +    /' Y SCALE          (', G13.6, 1X, 2A4, ')'
      +    /' CONCENTRATION  (', G13.6, 1X, 2A4, ')'
      +    /')'
5452  FORMAT(' X SCALE          (', G13.6, 1X, 2A4, ')'
      +    /' Y SCALE          (', G13.6, 1X, 2A4, ')'
      +    /' T SCALE          (', G13.6, 1X, 2A4, ')'
      +    /')'
5453  FORMAT('      X'   '/'   Y', 3OI3)       00009660
5454  FORMAT('      X'   '/'   Y', 3OI4)       00009670
5455  FORMAT('      X'   '/'   Y', 3OI5)       00009680
5456  FORMAT('      X'   '/'   Y', 3OI6)
      IF(BTSS) GO TO 5458
      B = TC.GE.0.0
      IF(B) CALL PUTR(HHTC, TC)
      IF(.NOT.B) WRITE(LUW, 5001)
      WRITE(LUW, 5451)
      +    XS, HHXC(6), HHXC(7)                 00009690
      +    , YS, HHYC(6), HHYC(7)                 00009700
      +    , SC, HH9C(6), HH9C(7)                 00009710
      GO TO 5459

```

5458	CALL PUTR(HHTE, TE)	00009870
	WRITE(LUW, 5452)	00009880
+ .	XS, HHXC(6), HHXC(7)	00009890
+ .	YS, HHYC(6), HHYC(7)	00009900
+ .	SC, HHTC(6), HHTC(7)	00009910
5459	CONTINUE	00009920
	IF(NSX.EQ.3) WRITE(LUW, 5453) (JJ(IX), IX = 1, NX1)	00009930
	IF(NSX.EQ.4) WRITE(LUW, 5454) (JJ(IX), IX = 1, NX1)	00009940
	IF(NSX.EQ.5) WRITE(LUW, 5455) (JJ(IX), IX = 1, NX1)	00009950
	IF(NSX.EQ.6) WRITE(LUW, 5456) (JJ(IX), IX = 1, NX1)	00009960
	IF(NSY.GT.1) WRITE(LUW, 1001)	00009970
	CEM = O.O	00009980
	NCE = O	00009990
	NCM = O	00010000
	YC = YGM	00010010
	DO 5479 IY = 1, NY	00010020
	XC = XL	00010030
	DO 5469 IX = 1, NX1	00010040
	CALL CALC	00010050
	IF(C) 5465, 5462, 5461	00010060
5461	CEM = AMAX1(CEM, 100.0*CE/C)	00010070
5462	C = C/SC	00010080
	IF(C.GE.CM) GO TO 5463	00010090
	J = C + O.5	00010100
	GO TO 5467	00010110
5463	CONTINUE	00010120
	I = ALOG10(C)	00010130
	I = I - (NSX - 3)	00010140
	J = -I	00010150
	IF(I.LE.9) J = J - 10.0*INT(C/(10.0**I))	00010160
	NCM = NCM + 1	00010170
	GO TO 5467	00010180
5465	CONTINUE	00010190
	J = -1	00010200
	NCE = NCE + 1	00010210
5467	CONTINUE	00010220
	JJ(IX) = J	00010230
	XC = XC + XI	00010240
5469	CONTINUE	00010250
5473	FORMAT(1X, I5, 30I3)	00010260
5474	FORMAT(1X, I5, 30I4)	00010270
5475	FORMAT(1X, I5, 30I5)	00010280
5476	FORMAT(1X, I5, 30I6)	00010290
	JY = YC/YS	00010300
	IF(NSX.EQ.3) WRITE(LUW, 5473) JY, (JJ(IX), IX = 1, NX1)	00010310
	IF(NSX.EQ.4) WRITE(LUW, 5474) JY, (JJ(IX), IX = 1, NX1)	00010320
	IF(NSX.EQ.5) WRITE(LUW, 5475) JY, (JJ(IX), IX = 1, NX1)	00010330
	IF(NSX.EQ.6) WRITE(LUW, 5476) JY, (JJ(IX), IX = 1, NX1)	00010340
	IF(NSY.EQ.2) WRITE(LUW, 1001)	00010350
	IF(NSY.EQ.3) WRITE(LUW, 1002)	00010360
	IF(NSY.EQ.4) WRITE(LUW, 1003)	00010370
	YC = YC - YI	00010380
5479	CONTINUE	00010390
5481	FORMAT(' WORST APPROXIMATION = +-', G9.3, '%.')	00010400
5482	FORMAT(1X, I5, ' LARGE VALUE(S) IN -(MAGNITUDE+EXPONENT) FORM.')	00010410
5483	FORMAT(1X, I5, ' SOURCE(S) SHOWN AS "-1".')	00010420
	IF(CEM.GT.O.O) WRITE(LUW, 5481) CEM	00010430
	IF(NCM.GT.O ) WRITE(LUW, 5482) NCM	00010440
	IF(NCE.GT.O ) WRITE(LUW, 5483) NCE	00010450
	WRITE(LUW, 1001)	00010460
	XL = XC	00010470
	NX = NX - NX1	00010480
	IF(NX.GT.0) GO TO 5440	00010490
	WRITE(LUW, 1001)	00010500
	BTSS = .FALSE.	00010510
	GO TO 1500	00010520

```

C ----- .I ----- 00010530
5500 CALL PUSH(H9IQ) 00010540
HCMD = H9IP 00010550
GO TO 1700 00010560
C ----- .IC ----- 00010570
5510 CALL PUSH(HH9C(1)) 00010580
HCMD = H9I 00010590
GO TO 1700 00010600
C ----- .IG ----- 00010610
5520 CALL PUSH(H9G) 00010620
HCMD = H9I 00010630
GO TO 1700 00010640
C ----- .IQ ----- 00010650
5560 CONTINUE 00010660
5561 FORMAT( / 00010670
+ ' X Y '
+,' START MASS SOURCE '
+/' LOCATION LOCATION AREA '
+,' TIME FLOW RATE CONCENTR. ')
5562 FORMAT( / 00010720
+ ' X Y '
+,' START MASS/AREA SOURCE '
+/' LOCATION LOCATION AREA '
+,' TIME RATE CONCENTR. ')
5563 FORMAT( / 00010770
+ ' X Y '
+,' START VOLUME SOURCE '
+/' LOCATION LOCATION AREA '
+,' TIME FLOW RATE CONCENTR. ')
5564 FORMAT( / 00010820
+ ' X Y '
+,' START VOLUME/ SOURCE '
+/' LOCATION LOCATION AREA '
+,' TIME AREA RATE CONCENTR. ')
5565 FORMAT(1X, 6(' (', 2A4, ', ') ) 00010870
5566 FORMAT(1X, 6G13.6) 00010880
KQMO = 0 00010890
DO 5589 IQ = 1, NQ 00010900
KQX = KKQX(IQ) 00010910
KQM = KKQM(IQ) 00010920
GO TO (5571, 5572, 5573, 5574), KQM 00010930
5571 IF(KQM.NE.KQMO) WRITE(LUW, 5561) 00010940
H6 = HHQM(6) 00010950
H7 = HHQM(7) 00010960
Q = QQM(IQ) 00010970
GO TO 5580 00010980
5572 IF(KQM.NE.KQMO) WRITE(LUW, 5562) 00010990
H6 = HHQR(6) 00011000
H7 = HHQR(7) 00011010
Q = QQR(IQ) 00011020
GO TO 5580 00011030
5573 IF(KQM.NE.KQMO) WRITE(LUW, 5563) 00011040
H6 = HHQQ(6) 00011050
H7 = HHQQ(7) 00011060
Q = QQ(IQ) 00011070
GO TO 5580 00011080
5574 IF(KQM.NE.KQMO) WRITE(LUW, 5564) 00011090
H6 = HHQV(6) 00011100
H7 = HHQV(7) 00011110
Q = QQV(IQ) 00011120
GO TO 5580 00011130
C 5580 IF(KQM.NE.KQMO) WRITE(LUW, 5565) 00011140
+ HHQL(6), HHQL(7), HHQL(6), HHQL(7), HHQA(6), HHQA(7) 00011150
+ , HHQT(6), HHQT(7), H6 , H7 , HHQC(6), HHQC(7) 00011160
+ WRITE(LUW, 5566) QQXL(IQ), QQYL(IQ), QQA (IQ) 00011170
+ , QQT (IQ), Q . QQC (IQ) 00011180

```

```

      IF(KQX.EQ.2) WRITE(LUW, 5566) QQXM(IQ), QQYM(IQ)          00011190
      KQMO = KQM
5589    CONTINUE
      WRITE(LUW, 1001)
      GO TO 1500
C ===== .T ====== 00011240
5600    IF(KTE .GT. 0 .AND. KXC .NE. 0 .AND. KYC .NE. 0) GO TO 5610 00011250
      IF(BATCH) GO TO 8120
      CALL PUSH(HH9T(1))
      IF(KYC .EQ. 0) CALL PUSH(HHYC(1))
      IF(KXC .EQ. 0) CALL PUSH(HHXC(1))
      IF(KTE .EQ. 0) CALL PUSH(HHTE(1))
      GO TO 1500
5610    CONTINUE
      BTSS = .TRUE.
      CALL SETUP
      XC = X9C
      YC = Y9C
      CALL PUTR(HHTE, TE)
      CALL PUTR(HHXC, XC)
      CALL PUTR(HHYC, YC)
      CALL CALC
      CALL PUTR(HH9T, C)
      WRITE(LUW, 1001)
      BTSS = .FALSE.
      GO TO 1500
C ===== .TG ====== 00011450
5620    IF(KTE .GT. 0) GO TO 5630
      IF(BATCH) GO TO 8120
      CALL PUSH(H9TG)
      HCMD = HHTE(1)
      GO TO 1700
5630    CONTINUE
      BTSS = .TRUE.
      HCMD = H9G
      GO TO 1700
C ===== ERRORS ====== 00011550
C ===== PARAMETER ERROR (SERIOUS) ----- 00011560
8110    CONTINUE
      WRITE(LUP, 1081)
      IF(BATCH) GO TO 1400
      IF(BIP) GO TO 1700
      GO TO 1500
C ===== PARAMETER ERROR (NON-SERIOUS) - 00011620
8120    CONTINUE
      WRITE(LUP, 1081)
      IF(BATCH) GO TO 1500
      IF(BIP) GO TO 1700
      GO TO 1500
C ===== END ====== 00011680
C ===== INIT ====== 00011700
C ===== SUBROUTINE INIT
      LOGICAL*2     BERR, BATCH,BOP , BOE ,BTSS
+     , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8          00011720
      CHARACTER*4    HHCMD
+     , H   , HA   , HAR      , HHAX      , HHAY          00011730
+     , HC   , HD   , HHDX     , HHDY      , HHDR      , HHDM          00011740
+     , HE   , HF   , HG       , HHGG      , HHGL      , HHGT          00011750
+     , HH   , HI   , HIP     , HIL      , HIR           00011760
      CHARACTER*4
+     , HL   , HLX  , HLY   , HM           00011770
+     , HO   , HOD  , HOP   , HOE      , HOT      , HOW      , HHP          00011780
+     , HQ   , HQN  , HHQE     , HHQL      , HHQA      , HHQT          00011790
+     , HHQM   , HHQR     , HHQC      , HHQQ      , HHQV          00011800
      CHARACTER*4
+     , HL   , HLX  , HLY   , HM           00011810
+     , HO   , HOD  , HOP   , HOE      , HOT      , HOW      , HHP          00011820
+     , HQ   , HQN  , HHQE     , HHQL      , HHQA      , HHQT          00011830
+     , HHQM   , HHQR     , HHQC      , HHQQ      , HHQV          00011840

```

+ , HR	, HHRR	, HHRK	, HHRD	00011850		
CHARACTER*4					00011860	
+ , HS , HSC	, HSL , HSN	, HSX , HSY	, HHTC	. HHTE	00011870	
+ , HU	, HHU	, HHUL	, HHUM	. HHUT	00011880	
+ , HV	, HHVV	, HHVG	, HHVK	. HHVT	00011890	
+ , HHVR	, HHVI	, HHVD	, HHVU		00011900	
+ , HXY	, HHXC	, HHYC	, HHZM	, HH9C	00011910	
+ , HH9T					00011920	
CHARACTER*4					00011930	
+ , H9D , H9DC	, H9DG	, H9DP	, H9DQ	, H9FF	, H9G	00011940
+ , H9I , H9IC	, H9IG	, H9IP	, H9IQ	, H9TG		00011950
+ , HHC1	, HHC2		, HHC3			00011960
COMMON /CHAR/					00011970	
+ , HHCMD(30)					00011980	
+ , H , HA	, HAR	, HHAX (7)	, HHAY (7)		00011990	
+ , HC , HD	, HHDX (7)	, HHDY (7)	, HHDR (7)	, HHDM (7)	00012000	
+ , HE , HF	, HG	, HHGG (7)	, HHGL (7)	, HHGT (7)	00012010	
+ , HH , HI	, HIP	, HIL	, HIR		00012020	
+ , HL , HLX	, HLY	, HM			00012030	
+ , HO , HOD	, HOP	, HOE	, HOT	, HOW	, HHPP (7)	00012040
+ , HQ , HQN	, HHQE (7)	, HHQL (7)	, HHQA (7)	, HHQT (7)		00012050
+ , HHQM (7)	, HHQR (7)	, HHQC (7)	, HHQQ (7)	, HHQV (7)		00012060
+ , HR	, HHRR (7)	, HHRK (7)	, HHRD (7)		00012070	
+ , HS , HSC	, HSL	, HSN	, HSX	, HSY	, HHTC (7)	00012080
+ , HU	, HHU (7)	, HHUL (7)	, HHUM (7)	, HHUT (7)		00012090
+ , HV	, HHVV (7)	, HHVG (7)	, HHVK (7)	, HHVT (7)		00012100
+ , HHVR (7)	, HHVI (7)	, HHVD (7)	, HHVU (7)		00012110	
+ , HXY	, HHXC (7)	, HHYC (7)	, HHZM (7)	, HH9C (7)		00012120
+ , HH9T (7)						00012130
+ , H9D , H9DC	, H9DG	, H9DP	, H9DQ	, H9FF	, H9G	00012140
+ , H9I , H9IC	, H9IG	, H9IP	, H9IQ	, H9TG		00012150
+ , HHC1 (18)	, HHC2 (18)	, HHC3 (18)				00012160
COMMON /BIT/					00012170	
+ , BERR , BATCH					00012180	
+ , BOP , BOE , BTSS					00012190	
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8					00012200	
COMMON /INTE/					00012210	
+ , LUL , LUM , LUR , LUP , LUE , LUW					00012220	
+ , MCMD					00012230	
+ , KDX , KDY , KG , KLX , KLY , KR					00012240	
+ , KTE , KVG , KVP , KVR , KXC , KYC					00012250	
+ , NQ , NQN , NSL , NSN , NSX , NSY					00012260	
+ , MQ					00012270	
+ , KKQX( 10) , KKQM( 10)					00012280	
COMMON /REAL/					00012290	
+ , UA , UD , UGL , UGT , ULC					00012300	
+ , UOL , UQA , UQT , UQM , UQR , UQC , UQQ , UQV					00012310	
+ , URK , URD , UTC , UVV , UVK , UVT , UVI , UVD , UVU , UZM					00012320	
+ , USC					00012330	
+ , AX , AY , C , CE , DX , DY , DR , DM , DXT , DYT					00012340	
+ , G , GL , GT , G2 , P , QE , QD					00012350	
+ , R , RK , RP , RD , SC , TC , TD , TE , TPHI					00012360	
+ , V , VN , VG , VP , VK , VKN , VT , VTN , VM					00012370	
+ , VR , VI , VD , VU					00012380	
+ , XC , X9C , XGL , XGM , XGI , XD					00012390	
+ , YC , Y9C , YGL , YGM , YGI , YD , ZM					00012400	
+ , QQXL( 10) , QQXM( 10) , QQYL( 10) , QQYM( 10)					00012410	
+ , QQA ( 10) , QQT ( 10) , QQV ( 10) , QQ ( 10)					00012420	
+ , QOC ( 10) , QQR ( 10) , QQM ( 10)					00012430	
OPEN(1,FILE='BLOCK.DAT')					00012440	
C ===== CHARACTER ======					00012450	
7000 FORMAT(20A4)					00012460	
READ(1,7000)(HHCMD(I),I=1,30)					00012470	
READ(1,7000) H,HA,HAR					00012480	
READ(1,7000)(HHAX(I),I=1,7)					00012490	
READ(1,7000)(HHAY(I),I=1,7)					00012500	

READ(1,7000) HC,HD	00012510
READ(1,7000)(HHDX(I),I=1,7)	00012520
READ(1,7000)(HHDY(I),I=1,7)	00012530
READ(1,7000)(HHDR(I),I=1,7)	00012540
READ(1,7000)(HHDM(I),I=1,7)	00012550
READ(1,7000) HE,HF,HG	00012560
READ(1,7000)(HHGG(I),I=1,7)	00012570
READ(1,7000)(HHGL(I),I=1,7)	00012580
READ(1,7000)(HHGT(I),I=1,7)	00012590
READ(1,7000) HH,HI	00012600
READ(1,7000) HIP,HIL,HIR	00012610
READ(1,7000) HL,HLX,HLY,HM	00012620
READ(1,7000) HO,HOD,HOW	00012630
READ(1,7000) HOP,HOE,HOT	00012640
READ(1,7000)(HHP(I),I=1,7)	00012650
READ(1,7000) HQ,HQN	00012660
READ(1,7000)(HHQL(I),I=1,7)	00012670
READ(1,7000)(HHQA(I),I=1,7)	00012680
READ(1,7000)(HHQT(I),I=1,7)	00012690
READ(1,7000)(HHQM(I),I=1,7)	00012700
READ(1,7000)(HHQR(I),I=1,7)	00012710
READ(1,7000)(HHQC(I),I=1,7)	00012720
READ(1,7000)(HHQQ(I),I=1,7)	00012730
READ(1,7000)(HHQV(I),I=1,7)	00012740
READ(1,7000)(HHQE(I),I=1,7)	00012750
READ(1,7000) HR	00012760
READ(1,7000)(HHRR(I),I=1,7)	00012770
READ(1,7000) HS,HSC,HSL	00012780
READ(1,7000) HSX,HSN,HSY	00012790
READ(1,7000)(HHTC(I),I=1,7)	00012800
READ(1,7000)(HYTE(I),I=1,7)	00012810
READ(1,7000) HU	00012820
READ(1,7000) HV	00012830
READ(1,7000)(HHVV(I),I=1,7)	00012840
READ(1,7000) HXY	00012850
READ(1,7000)(HHXC(I),I=1,7)	00012860
READ(1,7000)(HHYC(I),I=1,7)	00012870
READ(1,7000)(HHZM(I),I=1,7)	00012880
READ(1,7000)(HH9C(I),I=1,7)	00012890
READ(1,7000)(HH9T(I),I=1,7)	00012900
READ(1,7000) H9D,H9DC,H9DG	00012910
READ(1,7000) H9DP,H9DQ	00012920
READ(1,7000) H9FF,H9G	00012930
READ(1,7000) H9I,H9IC,H9IG	00012940
READ(1,7000) H9IP,H9IQ,H9TG	00012950
C ===== BIT ======	00012960
C ----- I/O OPTIONS -----	00012970
7010 FORMAT(4L2)	00012980
READ(1,7010) BATCH	00012990
READ(1,7010) BOP,BOE,BTSS	00013000
READ(1,7010) BT1,BT2,BT3,BT4	00013010
READ(1,7010) BT5,BT6,BT7,BT8	00013020
C ===== INTEGER ======	00013030
C ----- I/O UNITS, DIMENSIONS -----	00013040
7020 FORMAT(5I5)	00013050
READ(1,7020) LUL,LUM	00013060
READ(1,7020) LUR,LUP,LUE,LUW	00013070
READ(1,7020) MCMD,MQ	00013080
C ----- FLAGS AND COUNTS -----	00013090
READ(1,7020) KDX,KDY,KG,KLX,KLY	00013100
READ(1,7020) KR,KTE,KVG,KVP,KVR	00013110
READ(1,7020) KXC,KYC,NQ,NQN	00013120
READ(1,7020) NSL,NSN,NSX,NSY	00013130
C ===== REAL ======	00013140
C ----- UNITS, PARAMETERS -----	00013150
7030 FORMAT(3F13.10)	00013160

READ(1,7030) UA,UD	00013170
READ(1,7030) UGL,UGT,ULC	00013180
READ(1,7030) UQL,UQA,UQT	00013190
READ(1,7030) UQM,UQR,UQC	00013200
READ(1,7030) UQQ,UQV	00013210
READ(1,7030) URK,URD,UTC	00013220
READ(1,7030) UVV,UVK,UVT	00013230
READ(1,7030) UVI,UVD,UVU	00013240
READ(1,7030) UZM,U9C	00013250
READ(1,7030) DM,QE,SC	00013260
END	00013270
C ===== PUSH ======	00013280
SUBROUTINE PUSH(HO)	00013290
LOGICAL*2 BERR, BATCH,BOP , BOE ,BTSS	00013300
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8	00013310
CHARACTER*4	00013320
+ HHCMD	00013330
+ , H , HA , HAR , HHAX , HHAY	00013340
+ , HC , HD , HHDX , HHDY , HHDR , HHDM	00013350
+ , HE , HF , HG , HHGG , HHGL , HHGT	00013360
+ , HH , HI , HIP , HIL , HIR	00013370
CHARACTER*4	00013380
+ HL , HLX , HLY , HM	00013390
+ , HO , HOD , HOP , HOE , HOT , HOW , HHP	00013400
+ , HQ , HQN , HHQE , HHQL , HHQA , HHQT	00013410
+ , HHQM , HHQR , HHQC , HHQQ , HHQV	00013420
+ , HR , HHRR , HHRK , HHRD	00013430
CHARACTER*4	00013440
+ HS , HSC , HSL , HSN , HSX , HSY , HHTC , HHTE	00013450
+ , HU , HHU , HHUL , HHUM , HHUT	00013460
+ , HV , HHVV , HHVG , HHVK , HHVT	00013470
+ , HHVR , HHVI , HHVD , HHVU	00013480
+ , HXY , HHXC , HHYC , HHZM , HH9C	00013490
+ , HH9T	00013500
CHARACTER*4	00013510
+ , H9D , H9DC, H9DG, H9DP, H9DQ, H9FF, H9G	00013520
+ , H9I , H9IC, H9IG, H9IP, H9IQ, H9TG	00013530
+ , HHC1 , HHC2 , HHC3	00013540
CHARACTER*4 HO , H1 , H2	00013550
COMMON /CHAR/	00013560
+ HHCMD(30)	00013570
+ , H , HA , HAR , HHAX (7) , HHAY (7)	00013580
+ , HC , HD , HHDX (7) , HHDY (7) , HHDR (7) , HHDM (7)	00013590
+ , HE , HF , HG , HHGG (7) , HHGL (7) , HHGT (7)	00013600
+ , HH , HI , HIP , HIL , HIR	00013610
+ , HL , HLX , HLY , HM	00013620
+ , HO , HOD , HOP , HOE , HOT , HOW , HHP (7)	00013630
+ , HQ , HQN , HHQE (7) , HHQL (7) , HHQA (7) , HHQT (7)	00013640
+ , HHQM (7) , HHQR (7) , HHQC (7) , HHQQ (7) , HHQV (7)	00013650
+ , HR , HHRR (7) , HHRK (7) , HHRD (7)	00013660
+ , HS , HSC , HSL , HSN , HSX , HSY , HHTC (7) , HHTE (7)	00013670
+ , HU , HHU (7) , HHUL (7) , HHUM (7) , HHUT (7)	00013680
+ , HV , HHVV (7) , HHVG (7) , HHVK (7) , HHVT (7)	00013690
+ , HHVR (7) , HHVI (7) , HHVD (7) , HHVU (7)	00013700
+ , HXY , HHXC (7) , HHYC (7) , HHZM (7) , HH9C (7)	00013710
+ , HH9T (7)	00013720
+ , H9D , H9DC, H9DG, H9DP, H9DQ, H9FF, H9G	00013730
+ , H9I , H9IC, H9IG, H9IP, H9IQ, H9TG	00013740
+ , HHC1 (18) , HHC2 (18) , HHC3 (18)	00013750
COMMON /BIT /	00013760
+ BERR, BATCH	00013770
+ , BOP , BOE ,BTSS	00013780
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8	00013790
COMMON /INTE/	00013800
+ , LUL , LUM , LUR , LUP , LUE , LUW	00013810
+ , MCMD	00013820

```

+ , KDX , KDY , KG , KLX , KLY , KR          00013830
+ , KTE , KVG , KVP , KVR , KXC , KYC         00013840
+ , NQ , NQN , NSL , NSN , NSX , NSY         00013850
+ , MQ                                         00013860
+ , KKQX( 10) , KKQM( 10)                     00013870
H1 = HO                                         00013880
DO 5900 I = 1, MCMD                           00013890
H2 = HHCMD(I)                                 00013900
HHCMD(I) = H1                                  00013910
IF(H1.EQ.H) RETURN                            00013920
H1 = H2                                         00013930
5900    CONTINUE                                00013940
      WRITE(LUP, 9001) MCMD, H1                  00013950
9001 FORMAT(' STACK SPACE OF', I5, ' COMMANDS EXCEEDED.')
+   /' COMMAND ', A4, ' LOST.')
      END                                         00013970
C      ===== GETI ====== 00013990
      SUBROUTINE GETI(KO, LO, MO)
      LOGICAL*2      BERR, BATCH,BOP , BOE , BTSS        00014000
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8        00014010
      COMMON /BIT /
+   BERR, BATCH                                     00014030
+   BOP , BOE , BTSS                               00014040
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8        00014050
      COMMON /INTE/
+   LUL , LUM , LUR , LUP , LUE , LUW             00014060
+ , MCMD                                         00014070
+ , KDX , KDY , KG , KLX , KLY , KR             00014080
+ , KTE , KVG , KVP , KVR , KXC , KYC           00014090
+ , NQ , NQN , NSL , NSN , NSX , NSY           00014100
+ , MQ                                         00014110
+ , KKQX( 10) , KKQM( 10)                     00014120
1022 FORMAT(10I5)                                00014130
1032 FORMAT(1X, 10I5)
      READ(LUR, 1022) K1                         00014140
      IF(BOE) WRITE(LUE, 1032) K1
      BERR = .TRUE.
      IF(LO.LT.MO .AND. (K1.LT.LO .OR. K1.GT.MO) ) RETURN 00014150
      BERR = .FALSE.
      KO = K1
      RETURN
      END                                         00014160
C      ===== GETR ====== 00014170
      SUBROUTINE GETR(HHO, RO, BO)
      LOGICAL*2      BERR, BATCH,BOP , BOE , BTSS        00014180
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8        00014190
      LOGICAL*2      BO
      CHARACTER*4     HHO , H
      DIMENSION HHO(7)
      COMMON /BIT /
+   BERR, BATCH                                     00014200
+   BOP , BOE , BTSS                               00014210
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8        00014220
      COMMON /INTE/
+   LUL , LUM , LUR , LUP , LUE , LUW             00014230
+ , MCMD                                         00014240
+ , KDX , KDY , KG , KLX , KLY , KR             00014250
+ , KTE , KVG , KVP , KVR , KXC , KYC           00014260
+ , NQ , NQN , NSL , NSN , NSX , NSY           00014270
+ , MQ                                         00014280
+ , KKQX( 10) , KKQM( 10)                     00014290
      DATA H /' /'
1011 FORMAT(1X, 4A4, ' (',2A4, '):' / ' ?')
1012 FORMAT(1X, 4A4, ' (UNITLESS):' / ' ?')
1023 FORMAT(E15.0)
1033 FORMAT(1X, G15.7)                          00014300

```

```

QM = QQM(IQ)*UQM          00016470
QN = (QM - QMO)/QDA       00016480
YQ = YL + YI*0.5          00016490
DO 5290 IY = 1, NY        00016500
YN = (Y - YQ)/YD          00016510
XQ = XL + XI*0.5          00016520
DO 5190 IX = 1, NX        00016530
XN = (X - XQ)/XD          00016540
RN = SQRT(XN*XN + YN*YN)   00016550
IF(BTSS) GO TO 5000        00016560
IF(RN.LE.0.) GO TO 9100    00016570
IF(T.LT.0.) GO TO 4500    00016580
TN = (T - TQ)/TD          00016590
WO = (RN - TN)/SQRT(4.0*TN) 00016600
E = ERFC(WO)              00016610
4500      CONTINUE          00016620
CY = EXP( (XN/G2 - RN)*0.5) 00016630
CR = 4.0*SQRT(WPI*RN)      00016640
W = QN*CY*E/CR            00016650
5001 FORMAT(1X, 5G15.7)     00016660
IF(BT5) WRITE(LUW, 5001)    00016670
+      X, XQ, XD, XN, CR    00016680
+      , Y, YQ, YD, YN, CY   00016690
+      , T, TQ, TD, TN, E    00016700
+      , QM, QMO, QDA, QN, W 00016710
C = C + W                 00016720
CE = CE + W*ER/RN         00016730
GO TO 5090                00016740
5000      CONTINUE          00016750
CR = AMAX1(CR, RN)         00016760
5090      CONTINUE          00016770
XQ = XQ + XI               00016780
5190      CONTINUE          00016790
YQ = YQ + YI               00016800
5290      CONTINUE          00016810
QMO = QM                   00016820
5390      CONTINUE          00016830
IF(BTSS) GO TO 5500        00016840
C = C/USC                  00016850
CE = CE/USC                  00016860
GO TO 5990                00016870
5500      CONTINUE          00016880
IF(CR.GT.0.) C = CR / (SQRT(TPHI * TPHI + CR) + TPHI) 00016890
C = (TM + C * C * TD) / UTC 00016900
5990      CONTINUE          00016910
BERR = .FALSE.              00016920
RETURN                     00016930
9100      CONTINUE          00016940
C = -1.0                   00016950
CE = 0.0                   00016960
BERR = .TRUE.               00016970
RETURN                     00016980
END                         00016990
C ====== ERFC ====== 00017000
FUNCTION ERFC(WO)           00017010
DATA EO, E1, E2, E3, E4, E5  00017020
+   / .32759, .25438, -.28540, 1.42141, -1.45315, 1.06141 / 00017030
W = 1.0/(1.0 + EO*ABS(WO))  00017040
W = W*(E1 + W*(E2 + W*(E3 + W*(E4 + W*E5) ) ) )  00017050
E = W*EXP(-(WO*WO))        00017060
IF(WO.LT.0.) E = 2.0 - E    00017070
ERFC = E                    00017080
RETURN                      00017090
END                         00017100

```

\*\*\*\*\* TSO FOREGROUND HARDCOPY \*\*\*\*\*  
DSNAME=U11236C.BLOCKPC.DATA

I

A AR  
AX X DISPERSIVITY FT  
AY Y DISPERSIVITY FT  
C D  
DX X DISPERSION FT2/D  
DY Y DISPERSION FT2/D  
DR DISPERSION RATIO  
DM MOL. DIFFUSION FT2/D  
E F G  
GG DECAY GAMMA  
GL DECAY LAMBDA 1/YR  
GT DECAY HALF-LIFE YR  
H I  
IP IL IR  
L LX LY M  
O OD OW  
OP OE OT  
P POROSITY  
Q QN  
QL SOURCE LOCATION FT  
QA SOURCE AREA FT2  
QT SOURCE TIME DAYS  
QM MASS FLOW RATE LBM/D  
QR MASS/AREA RATE LB/FT2/D  
QC SOURCE CONCENTR. MG/L  
QQ VOLUME FLOW RATE FT3/D  
QV VOLUME/AREA RATE FT/D  
QE ACCURACY  
R  
RR RETARDATION  
S SC SL  
SX SN SY  
T SAMPLE TIME DAYS  
TE % STEADY STATE  
U  
V  
VV VELOCITY FT/D  
XY  
X X LOCATION FT  
Y Y LOCATION FT  
Z THICKNESS FT  
.C CONCENTRATION MG/L  
.T STEADY STATE DAYS  
.D .DC .DG  
.DP .DQ  
.FF .G  
.I .IC .IG  
.IP .IQ .TG  
F  
T F F  
F F F F  
F F F F  
6 10  
O O O O  
30 10  
O O O O O  
O O O O O  
O O O 100  
80 O 6 2  
1.0 1.0



```

IF(.NOT.BOP) GO TO 3000
IF(HHO(6).EQ.H) GO TO 2500
WRITE(LUP, 1011) (HHO(I), I = 2, 7)
GO TO 3000
2500 WRITE(LUP, 1012) (HHO(I), I = 2, 5)
READ(LUR, 1023) R1
IF(BOE) WRITE(LUE, 1033) R1
BERR = .TRUE.
IF(BO .AND. R1.LE.O) RETURN
BERR = .FALSE.
RO = R1
RETURN
END
=====
SUBROUTINE PUTR(HHO, RO)
LOGICAL*2 BERR, BATCH,BOP , BOE , BTSS
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8
CHARACTER*4 HHO
DIMENSION HHO(7)
COMMON /BIT /
+ BERR, BATCH
+ , BOP , BOE , BTSS
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8
COMMON /INTE/
+ LUL , LUM , LUR , LUP , LUE , LUW
+ , MCMD
+ , KDX , KDY , KG , KLX , KLY , KR
+ , KTE , KVG , KVP , KVR , KXC , KYC
+ , NQ , NQN , NSL , NSN , NSX , NSY
+ , MQ
+ , KKQX( 10) , KKQM( 10)
1001 FORMAT(1X, 4A4, '=' , G13.6, 1X, 2A4)
WRITE(LUW, 1001) (HHO(I), I = 2, 5), RO, HHO(6), HHO(7)
RETURN
END
=====
SUBROUTINE PUTH(HHO, LUO)
LOGICAL*2 BERR, BATCH,BOP , BOE , BTSS
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8
CHARACTER*4 HHO , H
DIMENSION HHO(18)
COMMON /BIT /
+ BERR, BATCH
+ , BOP , BOE , BTSS
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8
COMMON /INTE/
+ LUL , LUM , LUR , LUP , LUE , LUW
+ , MCMD
+ , KDX , KDY , KG , KLX , KLY , KR
+ , KTE , KVG , KVP , KVR , KXC , KYC
+ , NQ , NQN , NSL , NSN , NSX , NSY
+ , MQ
+ , KKQX( 10) , KKQM( 10)
DATA H '/' /
1001 FORMAT(1X, 18A4)
N = 18
DO 2900 I = 1, 17
  IF(HHO(N).NE.H) GO TO 3000
  N = N - 1
2900 CONTINUE
3000 CONTINUE
WRITE(LUO, 1001) (HHO(I), I = 1, N)
RETURN
END
=====
SUBROUTINE SETUP

```

```

LOGICAL*2      BERR, BATCH,BOP , BOE , BTSS          00015150
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8  00015160
COMMON /BIT /
+ BERR, BATCH
+ , BOP , BOE , BTSS
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8  00015170
COMMON /INTE/
+ LUL , LUM , LUR , LUP , LUE , LUW
+ , MCMD
+ , KDX , KDY , KG , KLX , KLY , KR
+ , KTE , KVG , KVP , KVR , KXC , KYC
+ , NQ , NQN , NSL , NSN , NSX , NSY
+ , MQ
+ , KKQX( 10) , KKQM( 10)
COMMON /REAL/
+ UA , UD , UGL , UGT , ULC          00015180
+ , UQL , UQA , UQT , UQM , UQR , UQC , UQQ , UQV  00015190
+ , URK , URD , UTC , UVV , UVK , UVT , UVI , UVD , UVU , UZM  00015200
+ , USC
+ , AX , AY , C , CE , DX , DY , DR , DM , DXT , DYT  00015210
+ , G , GL , GT , G2 , P , QE , QD  00015220
+ , R , RK , RP , RD , SC , TC , TD , TE , TPHI  00015230
+ , V , VN , VG , VP , VK , VKN , VT , VTN , VM  00015240
+ , VR , VI , VD , VU
+ , XC , X9C , XGL , XGM , XGI , XD  00015250
+ , YC , Y9C , YGL , YGM , YGI , YD , ZM  00015260
+ , QQXL( 10) , QQXM( 10) , QQYL( 10) , QQYM( 10)  00015270
+ , QQA ( 10) , QQT ( 10) , QQV ( 10) , QQ ( 10)  00015280
+ , QQC ( 10) , QQR ( 10) , QQM ( 10)  00015290
C ----- CALCULATE BASIC PARAMETERS ----- 00015300
V1 = V *UVV          00015310
V2 = V1*V1          00015320
IF(KDX.EQ.2 ) DX = AX*UA*V1/ UD          00015330
IF(KDX.EQ.1 ) AX = DX*UD / (V1*UA)  00015340
IF(KDY.EQ.3 ) DY = DX / DR          00015350
IF(KDY.EQ.2 ) DY = AY*UA*V1/ UD          00015360
IF(KDY.NE.2 ) AY = DY*UD / (V1*UA)  00015370
IF(KDY.LT.3 ) DR = DX / DY          00015380
DXT = DX + DM          00015390
DYT = DY + DM          00015400
D1 = DXT*UD          00015410
D2 = SQRT(D1*DYT*UD)  00015420
IF(KG .EQ.3 ) GL = ALOG(2.0)/(GT*UGL*UGL)  00015430
IF(KG .GE.2 ) G  = 1.0 + 4.0*GL*UGL*D1/V2  00015440
IF(KG .LT.2 ) GL = (G - 1.0)*V2/(4.0*D1*UGL)  00015450
IF(KG .LT.3 .AND. GL.GT.0.) GT = ALOG(2.0)/(GL*UGL*UGT)  00015460
G2 = SQRT(G)          00015470
C ----- NORMALIZING VARIABLES ----- 00015480
XD = D1 / (G2*V1)  00015490
YD = D2 / (G2*V1)  00015500
TD = R *D1/(G *V2)  00015510
QD = P *ZM*UZM*D2  00015520
RETURN              00015530
END
C ====== CALC ====== 00015540
SUBROUTINE CALC
LOGICAL*2      BERR, BATCH,BOP , BOE , BTSS          00015550
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8  00015560
COMMON /BIT /
+ BERR, BATCH
+ , BOP , BOE , BTSS
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8  00015570
COMMON /INTE/
+ LUL , LUM , LUR , LUP , LUE , LUW
+ , MCMD
+ , KDX , KDY , KG , KLX , KLY , KR  00015580

```

```

+ , KTE , KVG , KVP , KVR , KXC , KYC          00015810
+ , NQ , NQN , NSL , NSN , NSX , NSY          00015820
+ , MQ          00015830
+ , KKQX( 10) , KKQM( 10)          00015840
COMMON /REAL/
+ , UA , UD , UGL , UGT , ULC          00015850
+ , UQL , UQA , UQT , UQM , UQR , UQC , UQQ , UQV          00015860
+ , URK , URD , UTC , UVV , UVK , UVT , UVI , UVD , UVU , UZM          00015870
+ , U9C          00015880
+ , AX , AY , C , CE , DX , DY , DR , DM , DXT , DYT          00015890
+ , G , GL , GT , G2 , P , QE , QD          00015900
+ , R , RK , RP , RD , SC , TC , TD , TE , TPHI          00015910
+ , V , VN , VG , VP , VK , VKN , VT , VTN , VM          00015920
+ , VR , VI , VD , VU          00015930
+ , XC , X9C , XGL , XGM , XGI , XD          00015940
+ , YC , Y9C , YGL , YGM , YGI , YD , ZM          00015950
+ , QQXL( 10) , QQXM( 10) , QQYL( 10) , QQYM( 10)          00015960
+ , QQA ( 10) , QQT ( 10) , QQV ( 10) , QQ ( 10)          00015970
+ , QQC ( 10) , QQR ( 10) , QQM ( 10)          00015980
+ , DATA WPI / 3.14159265 /
X = XC*ULC          00015990
Y = YC*ULC          00016000
T = TC*UTC          00016010
E = 2.0          00016020
C = O.          00016030
CE = O.          00016040
CR = O.          00016050
TM = QQT(1)*UQT          00016060
DO 5390 IQ = 1, NQ          00016070
TQ = QQT(IQ)*UQT          00016080
TM = AMAX1(TM,TQ)          00016090
IF(T.GE.O. .AND. TQ.GE.T) GO TO 5390          00016100
KQX = KKQX(IQ)          00016110
IF(KQX.LT.O) GO TO 3000          00016120
KQX = KKQX(IQ)          00016130
IF(KQX.LT.O) GO TO 3000          00016140
XL = QQXL(IQ)*UQL          00016150
YL = QQYL(IQ)*UQL          00016160
GO TO (2100, 2200), KQX          00016170
2100 CONTINUE          00016180
NX = 1          00016190
XI = O.          00016200
NY = 1          00016210
YI = O.          00016220
S2 = QQA (IQ)*UQA          00016230
QDA = QD          00016240
GO TO 2900          00016250
2200 CONTINUE          00016260
XM = QQXM(IQ)*UQL          00016270
YM = QQYM(IQ)*UQL          00016280
RN = AMAX1(X-XM, XL-X, Y-YM, YL-Y)          00016290
IF(RN.LE.O.) GO TO 9100          00016300
XI = XM - XL          00016310
YI = YM - YL          00016320
XN = NQN          00016330
S = SQRT(AMAX1(50.0*XD*QE*RN/(1.0 + DR), XI*YI/XN) )          00016340
NX = NQN - MAX1(XN - XI/S, O.)          00016350
XI = XI/FLOAT(NX)          00016360
NY = NQN - MAX1(XN - YI/S, O.)          00016370
YI = YI/FLOAT(NY)          00016380
S2 = AMAX1(XI, YI)          00016390
S2 = S2*S2          00016400
QDA = FLOAT(NX)*FLOAT(NY)*QD          00016410
2900 CONTINUE          00016420
ER = O.02*S2*(1.0 + DR)/(XD*XD)          00016430
IF(T.GE.O.) ER = ER + O.2          00016440
QMO = O.          00016450
3000 CONTINUE          00016460

```

```

LOGICAL*2      BERR, BATCH,BOP , BOE , BTSS          00015150
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8  00015160
COMMON /BIT /
+ BERR, BATCH
+ , BOP , BOE , BTSS
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8  00015170
00015180
COMMON /INTE/
+ LUL , LUM , LUR , LUP , LUE , LUW
+ , MCMD
+ , KDX , KDY , KG , KLX , KLY , KR
+ , KTE , KVG , KVP , KVR , KXC , KYC
+ , NQ , NON , NSL , NSN , NSX , NSY
+ , MQ
+ , KKQX( 10) , KKQM( 10)
COMMON /REAL/
+ UA : UD : UGL : UGT : ULC
+ , UQL : UQA : UQT : UQM : UQR : UOC : UQQ : UOV  00015200
+ , URK : URD : UTC : UVV : UVK : UVT : UVI : UVD : UVU : UZM  00015210
00015220
+ , U9C
+ , AX : AY : C : CE : DX : DY : DR : DM : DXT : DYT  00015230
00015240
+ , G : GL : GT : G2 : P : QE : QD
+ , R : RK : RP : RD : SC : TC : TD : TE : TPHI  00015250
00015260
+ , V : VN : VG : VP : VK : VKN : VT : VTN : VM
+ , VR : VI : VD : VU
+ , XC : X9C : XGL : XGM : XGI : XD
+ , YC : Y9C : YGL : YGM : YGI : YD : ZM  00015270
00015280
00015290
+ , QQXL( 10) , QQXM( 10) , QQYL( 10) , QQYM( 10)
+ , QQA ( 10) , QQT ( 10) , QQV ( 10) , QQ ( 10)  00015300
00015310
+ , QQC ( 10) , QQR ( 10) , QQM ( 10)  00015320
00015330
00015340
00015350
00015360
00015370
00015380
00015390
00015400
00015410
00015420
00015430
00015440
C ----- CALCULATE BASIC PARAMETERS -----
V1 = V *UVV          00015450
V2 = V1*V1          00015460
IF(KDX.EQ.2 ) DX = AX*UA*V1/ UD          00015470
IF(KDX.EQ.1 ) AX = DX*UD / (V1*UA)  00015480
IF(KDY.EQ.3 ) DY = DX / DR          00015490
IF(KDY.EQ.2 ) DY = AY*UA*V1/ UD          00015500
IF(KDY.NE.2 ) AY = DY*UD / (V1*UA)  00015510
IF(KDY.LT.3 ) DR = DX / DY          00015520
DXT = DX + DM          00015530
DYT = DY + DM          00015540
D1 = DXT*UD          00015550
D2 = SQRT(D1*DYT*UD)  00015560
IF(KG .EQ.3 ) GL = ALOG(2.0)/(GT*UGT*UGL)  00015570
IF(KG .GE.2 ) G = 1.0 + 4.0*GL*UGL*D1/V2  00015580
IF(KG .LT.2 ) GL = (G - 1.0)*V2/(4.0*D1*UGL)  00015590
IF(KG .LT.3 .AND. GL.GT.0.) GT = ALOG(2.0)/(GL*UGL*UGT)  00015600
G2 = SQRT(G)          00015610
00015620
C ----- NORMALIZING VARIABLES -----
XD = D1 / (G2*V1)          00015630
YD = D2 / (G2*V1)          00015640
TD = R *D1/(G *V2)          00015650
QD = P *ZM*UZM*D2          00015660
RETURN          00015670
END          00015680
C ====== CALC ====== 00015690
SUBROUTINE CALC          00015700
LOGICAL*2      BERR, BATCH,BOP , BOE , BTSS          00015710
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8  00015720
COMMON /BIT /
+ BERR, BATCH
+ , BOP , BOE , BTSS
+ , BT1 , BT2 , BT3 , BT4 , BT5 , BT6 , BT7 , BT8  00015730
00015740
COMMON /INTE/
+ LUL , LUM , LUR , LUP , LUE , LUW
+ , MCMD
+ , KDX , KDY , KG , KLX , KLY , KR
00015750
00015760
00015770
00015780
00015790
00015800

```

```

+ , KTE , KVG , KVP , KVR , KXC , KYC          00015810
+ , NQ , NQN , NSL , NSN , NSX , NSY          00015820
+ , MQ                                         00015830
+ , KKQX( 10) , KKQM( 10)                      00015840
COMMON /REAL/
+ , UA , UD , UGL , UGT , ULC                  00015850
+ , UQL , UQA , UQT , UQM , UQR , UQC , UQQ , UQV      00015860
+ , URK , URD , UTC , UVV , UVK , UVT , UVI , UVD , UVU , UZM      00015870
+ , U9C                                         00015880
+ , AX , AY , C , CE , DX , DY , DR , DM , DXT , DYT      00015890
+ , G , GL , GT , G2 , P , QE , QD              00015900
+ , R , RK , RP , RD , SC , TC , TD , TE , TPHI      00015910
+ , V , VN , VG , VP , VK , VKN , VT , VTN , VM      00015920
+ , VR , VI , VD , VU                                         00015930
+ , XC , X9C , XGL , XGM , XGI , XD              00015940
+ , YC , Y9C , YGL , YGM , YGI , YD , ZM          00015950
+ , QQXL( 10) , QQXM( 10) , QOYL( 10) , QQYM( 10)      00015960
+ , QQA ( 10) , QQT ( 10) , QQV ( 10) , QQ ( 10)      00015970
+ , QQC ( 10) , QQR ( 10) , QQM ( 10)          00015980
+ , QQC ( 10) , QQR ( 10) , QQM ( 10)          00015990
DATA WPI / 3.14159265 /
X = XC*ULC                                         00016000
Y = YC*ULC                                         00016010
T = TC*UTC                                         00016020
E = 2.0                                           00016030
C = O.                                            00016040
CE = O.                                           00016050
CR = O.                                           00016060
TM = QQT(1)*UQT                                     00016070
DO 5390 IQ = 1, NQ
TQ = QQT(IQ)*UQT
TM = AMAX1(TM, TQ)
IF(T.GE.O. .AND. TQ.GE.T) GO TO 5390
KQX = KKQX(IQ)
IF(KQX.LT.O) GO TO 3000
XL = QQXL(IQ)*UQL
YL = QQYL(IQ)*UQL
GO TO (2100, 2200), KQX
2100  CONTINUE
NX = 1                                              00016100
XI = O.                                             00016110
NY = 1                                              00016120
YI = O.                                             00016130
S2 = QQA (IQ)*UQA
QDA = QD
GO TO 2300
2200  CONTINUE
XM = QQXM(IQ)*UQL
YM = QQYM(IQ)*UQL
RN = AMAX1(X-XM, XL-X, Y-YM, YL-Y)
IF(RN.LE.O.) GO TO 9100
XI = XM - XL
YI = YM - YL
XN = NQN
S = SQRT(AMAX1(50.0*XD-QE*RN/(1.0 + DR), XI*YI/XN) )
NX = NQN - MAX1(XN - XI/S, O.)
XI = XI/FLOAT(NX)
NY = NQN - MAX1(XN - YI/S, O.)
YI = YI/FLOAT(NY)
S2 = AMAX1(XI, YI)
S2 = S2*S2
QDA = FLOAT(NX)*FLOAT(NY)*QD
2900  CONTINUE
ER = O.02*S2*(1.0 + DR)/(XD-XD)
IF(T.GE.O.) ER = ER + O.2
QMO = O.
3000  CONTINUE

```

```

QM = QQM(IQ)*UQM          00016470
QN = (QM - QMO)/QDA        00016480
YQ = YL + YI*0.5          00016490
DO 5290 IY = 1, NY         00016500
      YN = (Y - YQ)/YD      00016510
      XQ = XL + XI*0.5      00016520
DO 5190 IX = 1, NX         00016530
      XN = (X - XQ)/XD      00016540
      RN = SQRT(XN*XN + YN*YN) 00016550
      IF(BTSS) GO TO 5000     00016560
      IF(RN.LE.0.) GO TO 9100   00016570
      IF(T.LT.0.) GO TO 4500   00016580
      TN = (T - TQ)/TD       00016590
      WO = (RN - TN)/SQRT(4.0*TN) 00016600
      E = ERFC(WO)           00016610
4500    CONTINUE             00016620
      CY = EXP(-(XN/G2 - RN)*0.5) 00016630
      CR = 4.0*SQRT(WPI*RN)       00016640
      W = QN*CY*E/CR           00016650
5001 FORMAT(1X, 5G15.7)      00016660
      IF(BT5) WRITE(LUW, 5001)    00016670
+       X, XQ, XD, XN, CR      00016680
+       Y, YQ, YD, YN, CY      00016690
+       T, TQ, TD, TN, E       00016700
+       QM, QMO, QDA, QN, W     00016710
      C = C + W               00016720
      CE = CE + W*ER/RN       00016730
      GO TO 5090              00016740
5000    CONTINUE             00016750
      CR = AMAX1(CR, RN)       00016760
5090    CONTINUE             00016770
      XQ = XQ + XI             00016780
5190    CONTINUE             00016790
      YQ = YQ + YI             00016800
5290    CONTINUE             00016810
      QMO = QM                 00016820
5390    CONTINUE             00016830
      IF(BTSS) GO TO 5500     00016840
      C = C/U9C                00016850
      CE = CE/U9C                00016860
      GO TO 5990              00016870
5500    CONTINUE             00016880
      IF(CR .GT. 0.) C = CR / (SQRT(TPHI * TPHI + CR) + TPHI) 00016890
      C = (TM + C * C * TD) / UTC      00016900
5990    CONTINUE             00016910
      BERR = .FALSE.            00016920
      RETURN                  00016930
9100    CONTINUE             00016940
      C = -1.0                 00016950
      CE = 0.0                 00016960
      BERR = .TRUE.             00016970
      RETURN                  00016980
      END                     00016990
C ====== ERFC ====== 00017000
      FUNCTION ERFC(WO)        00017010
      DATA EO, E1, E2, E3, E4, E5   00017020
+      / .32759, .25438, -.28540, 1.42141, -1.45315, 1.06141 / 00017030
      W = 1.0/(1.0 + EO*ABS(WO))  00017040
      W = W*(E1 + W*(E2 + W*(E3 + W*(E4 + W*E5) ) ) ) 00017050
      E = W*EXP(-(WO*WO))       00017060
      IF(WO.LT.0.) E = 2.0 - E   00017070
      ERFC = E                  00017080
      RETURN                  00017090
      END                     00017100

```

\*\*\*\* TSO FOREGROUND HARDCOPY \*\*\*\*  
DSNAME=U11236C.BLOCKPC.DATA

I

A AR  
AX X DISPERSIVITY FT  
AY Y DISPERSIVITY FT  
C D  
DX X DISPERSION FT2/D  
DY Y DISPERSION FT2/D  
DR DISPERSION RATIO  
DM MOL. DIFFUSION FT2/D  
E F G  
GG DECAY GAMMA  
GL DECAY LAMBDA 1/YR  
GT DECAY HALF-LIFE YR  
H I  
IP IL IR  
L LX LY M  
O OO OW  
OP OE OT  
P POROSITY  
Q QN  
QL SOURCE LOCATION FT  
QA SOURCE AREA FT2  
QT SOURCE TIME DAYS  
QM MASS FLOW RATE LBM/D  
QR MASS/AREA RATE LB/FT2/D  
QC SOURCE CONCENTR. MG/L  
QQ VOLUME FLOW RATE FT3/D  
QV VOLUME/AREA RATE FT/D  
QE ACCURACY  
R  
RR RETARDATION  
S SC SL  
SX SN SY  
T SAMPLE TIME DAYS  
TE % STEADY STATE  
U  
V  
VV VELOCITY FT/D  
XY  
X X LOCATION FT  
Y Y LOCATION FT  
Z THICKNESS FT  
.C CONCENTRATION MG/L  
.T STEADY STATE DAYS  
.D .DC .DG  
.DP .DQ  
.FF .G  
.I .IC .IG  
.IP .IQ .TG  
F  
T F F  
F F F F  
F F F F  
6 10  
0 0 0 0  
30 10  
0 0 0 0 0  
0 0 0 0 0  
0 0 0 100  
80 0 6 2  
1.0 1.0

2.737909E-3	365.2422	1.0
1.0	1.0	1.0
1.0	1.0	62.42796E-6
1.0	1.0	
1.0	1.0	1.0
1.0	1.0	1.0
1.0	62.42796E-6	
0.0	0.1	1.0